



PRODUCT RANGE OVERVIEW 2026/2027

Smarter Solutions for Building and Home Automation ABB i-bus® KNX

Product description, quick and easy
selection of product codes



The right reaction comes automatically, in every situation. Being able to automatically control your building not only adds flexibility to building management, it has a positive effect on efficiency, security and productivity too. With products and services such as movement detectors, harmonious lighting, door communication, automated heating, air-conditioning, ventilation and shutter management, ABB offers a range of possibilities to put building control firmly into your hands.

Everything under control, wherever you want it. There's more to making buildings smarter than just remotely controlling room temperatures or automatically controlling lighting. A fully integrated system not only offers you convenience, it also makes your buildings more secure, more energy efficient and will save you money. What's more, ABB Ability™ software gives you a complete overview of your smart buildings from anywhere, at any time.

Wherever energy comes from, it goes to the right place. Electricity is a commodity you don't always appreciate until it's suddenly not there. At ABB it's our mission to supply you with the electricity you need, the moment you need it – such as when plugging in an appliance or turning on a switch. We take high-voltage energy from the source of generation and transmit it instantly to the business or home where it will be used.

The best solution is, keeping all the factors in view. The first step in managing your building's energy is to understand exactly how much you use and where you use it. With this information at hand, you can highlight areas for improvement, which in turn will help you become more efficient and ultimately save money. ABB metering devices connect with your building's automation system and intelligently acquire, store and analyse this information to drive efficiency for the long term.

ABB i-bus® KNX

Product Range Overview

2026/2027

ABB MyBuildings portal	2
Service & Support Tools	5
Overview	6
Power Supply	8
System Infrastructure and Interfacing	13
Connection and Wiring	19
Multifunction Room Automation	21
Inputs	30
Outputs	35
Shading Control	47
Lighting Control	52
Movement and Presence Detection	67
Heating, Ventilation and Air Conditioning	90
Automation, Logic and Time Control	112
Visualisation, Display and Signalling	116
Energy Management	132
Safety and Monitoring	136
Security	137
User Operation – Design Ranges	144
Unique diversity of the range	144
Functional Overview	146
PEONIA®	166
Yurika	180
ABB tacteo®	186
Busch-priOn®	198
ABB Tenton®	207
ABB Trevion®	221
saga touch™	241
Standard Control Elements	246
Multifunction Control Elements	248
Movement Detectors	252
Room Thermostats	256
Frames	257
Push Button Coupling Unit	266
Millenium	284
Zenit	290
Chiara	308
Selection Tables	309
Selection Table According to Order Code	310
Selection Table According to Type	327

You may also visit our KNX website:



www.abb.com/knx

CONNECTIVITY

Shaping the future of the digital world today requires fully automated solutions that can be networked with all other intelligent devices.



Powerful digital solutions in a single portfolio

MyBuildings portal powered by ABB Ability™

Controlling and planning smart buildings is now easier than ever: ABB bundles its digital services for Smarter Home and Building in the MyBuildings portal under the ABB Ability umbrella.

The online portal gives you access to many of ABB's tools and services that you can use for your individual needs. You have the option to configure KNX systems, door entry system or ABB tacteo® KNX as well as to extend system functionality with remote access or Amazon Alexa voice control. You can also connect your smart system to a mobile device.

You may visit our MyBuildings portal under mybuildings.abb.com:



Plan, configure and modify as desired with the MyBuildings platform powered by ABB Ability™

Planning und configuration


- ABB Building Planner
- ABB-Welcome configurator
- ABB tacteo® configurator

Commissioning

- KNX APP-Control Server
- Remote access
- Busch-VoiceControl®

Operation

- Remote access
- Amazon Alexa voice control
- Notifications

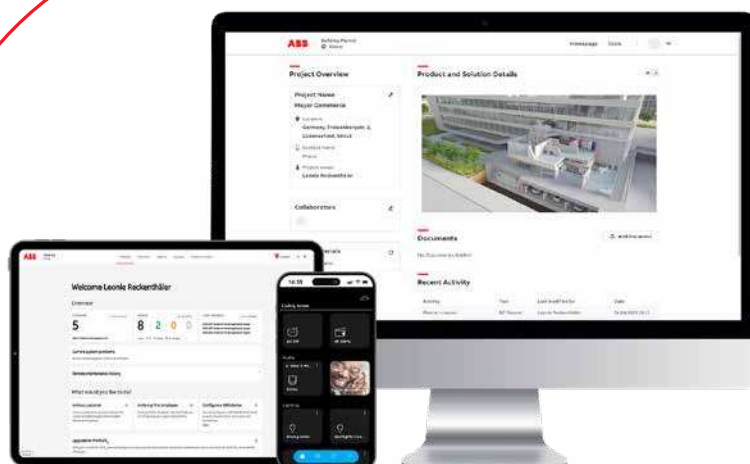

Your benefits



A central
contact point
for Smarter
Building
services.



Global
availability
of ABB services.



24/7 monitoring
for best worldwide
availability.



Regular
cyber security:
audits and
tests by
independent
third parties.

ABB i-bus® KNX – Service & Support Tools

For a fast and intuitive self-support in your daily work

ABB provides a wide range of tools to enable an uncomplicated and time-saving support for many of your concerns. Below you can find some tools which helps you during configuration and commissioning of your i-bus® KNX installation.



ABB Building Planner

The ABB Building Planner is a digital planning tool that supports the planning process of projects with ABB products. It automatically ensures compliance with sustainability regulations and standards. After the completion of the planning phase, a bill of materials (BOM) is delivered, while additional information could be extracted, e.g., the required number of module widths in the distribution board.



Visit our website




ABB i-bus® Tool

A professional service tool which supports system integrators during commissioning and service of KNX installations. For more information and to download the tool have a look on the linked website.



Visit our website



ABB Update Copy Convert

The ETS app Update Copy Convert provides a series of useful functions for ETS applications and device configuration (parameters and group addresses) in an ETS project.

The functions are:

- Update: Changes the application program to a later or earlier version while retaining current configurations.
- Convert: Transfers/adopts a configuration from an identical or compatible source device.
- Channel Copy: Copies a channel configuration to other channels on a multichannel device.
- Channel Exchange: Exchanges configurations between two channels on a multichannel device.
- Import/Export: Saves and reads device configurations as external files.



Download the app



Firmware Update 2.0


With this ETS app you are able to updating the firmware of your device directly via the KNX bus. The app can be used with the ETS5 or higher.



Download the app

ABB i-bus® KNX

Overview

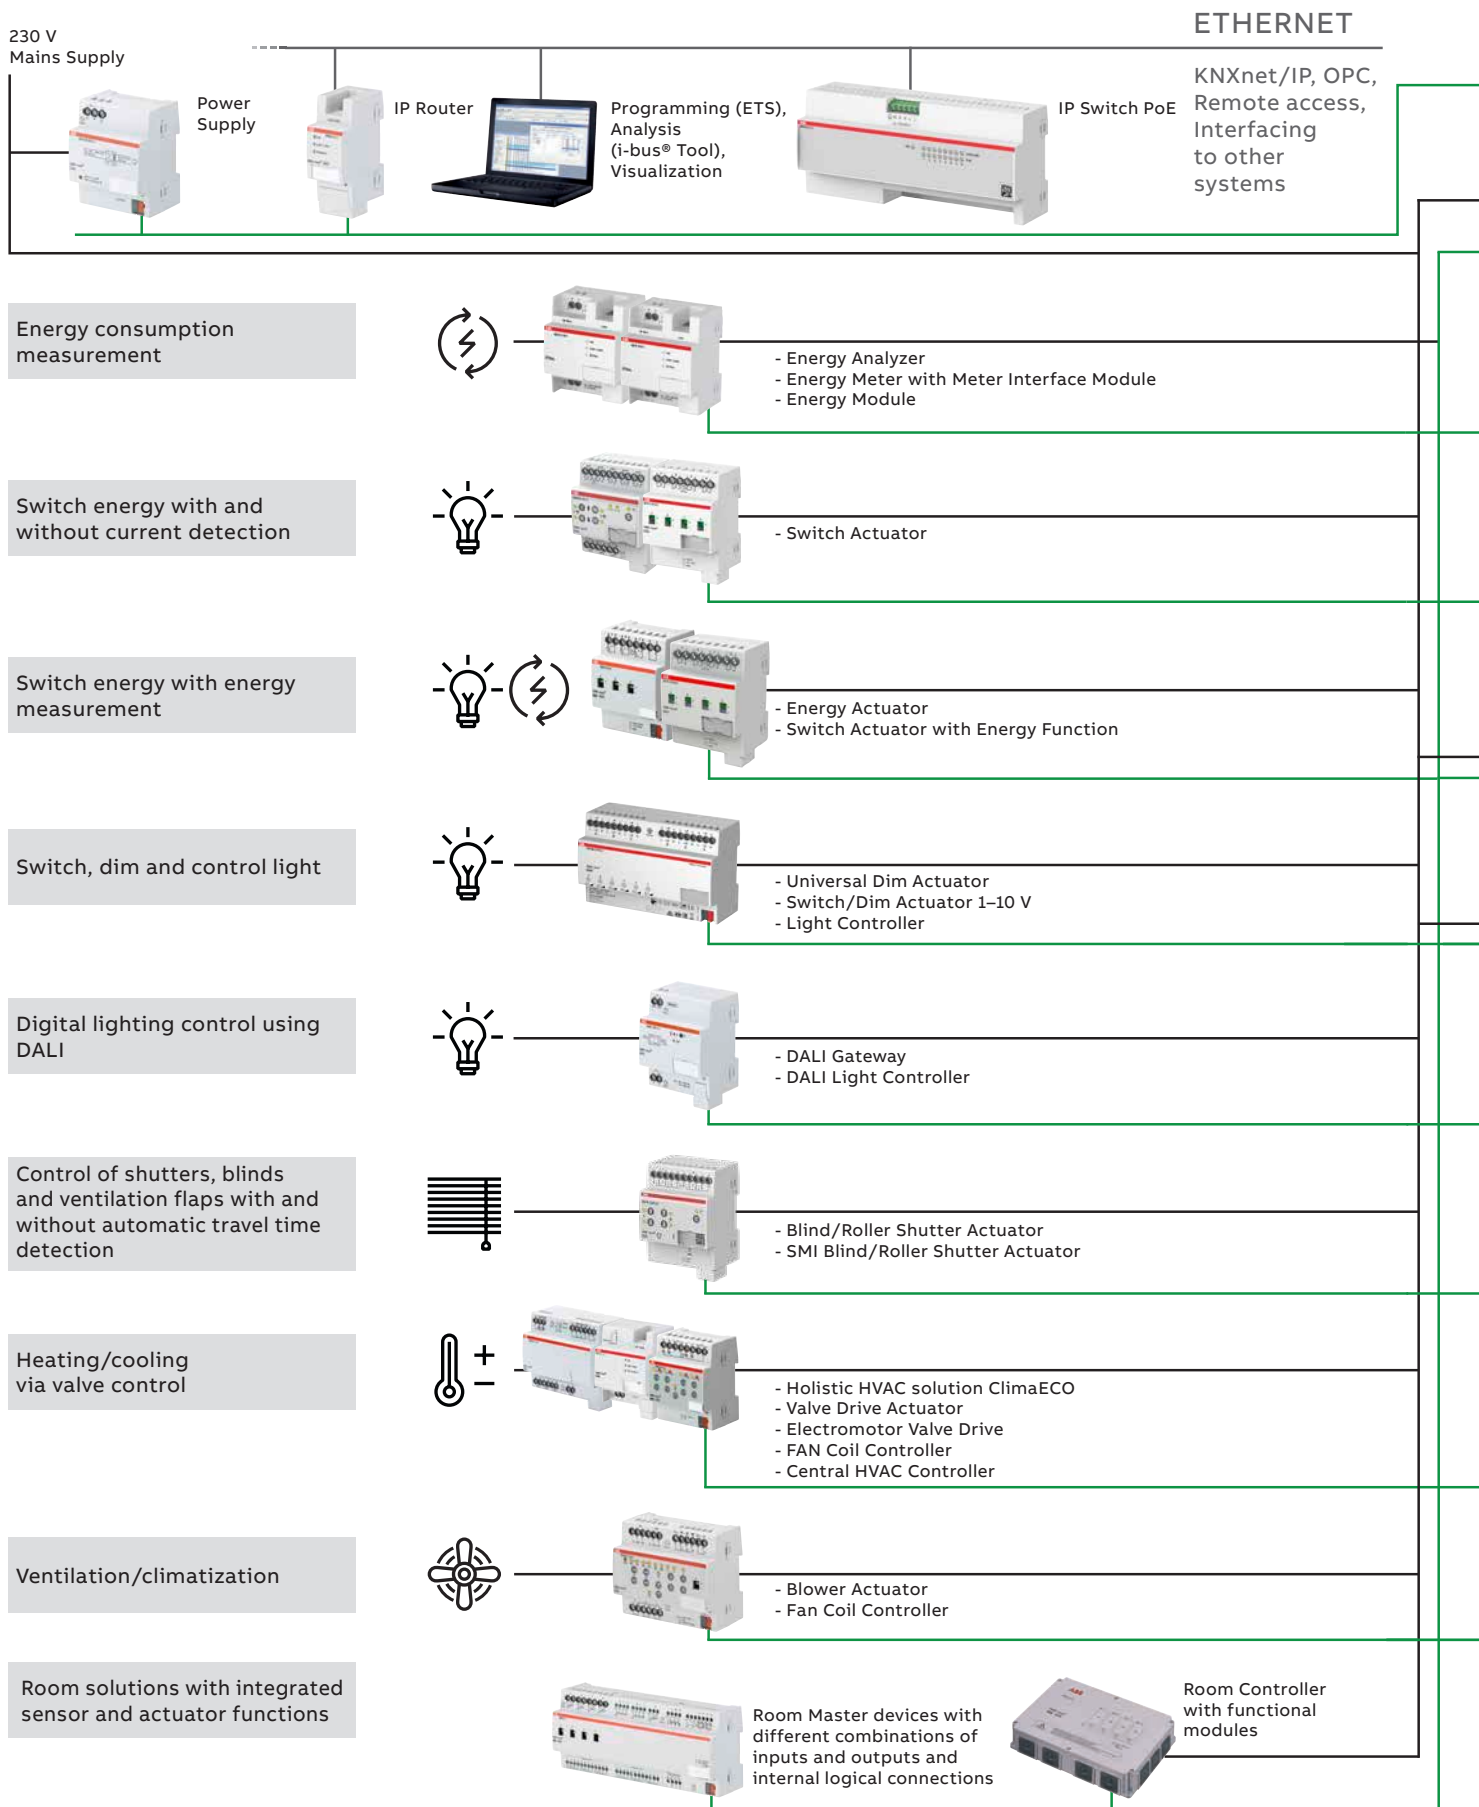

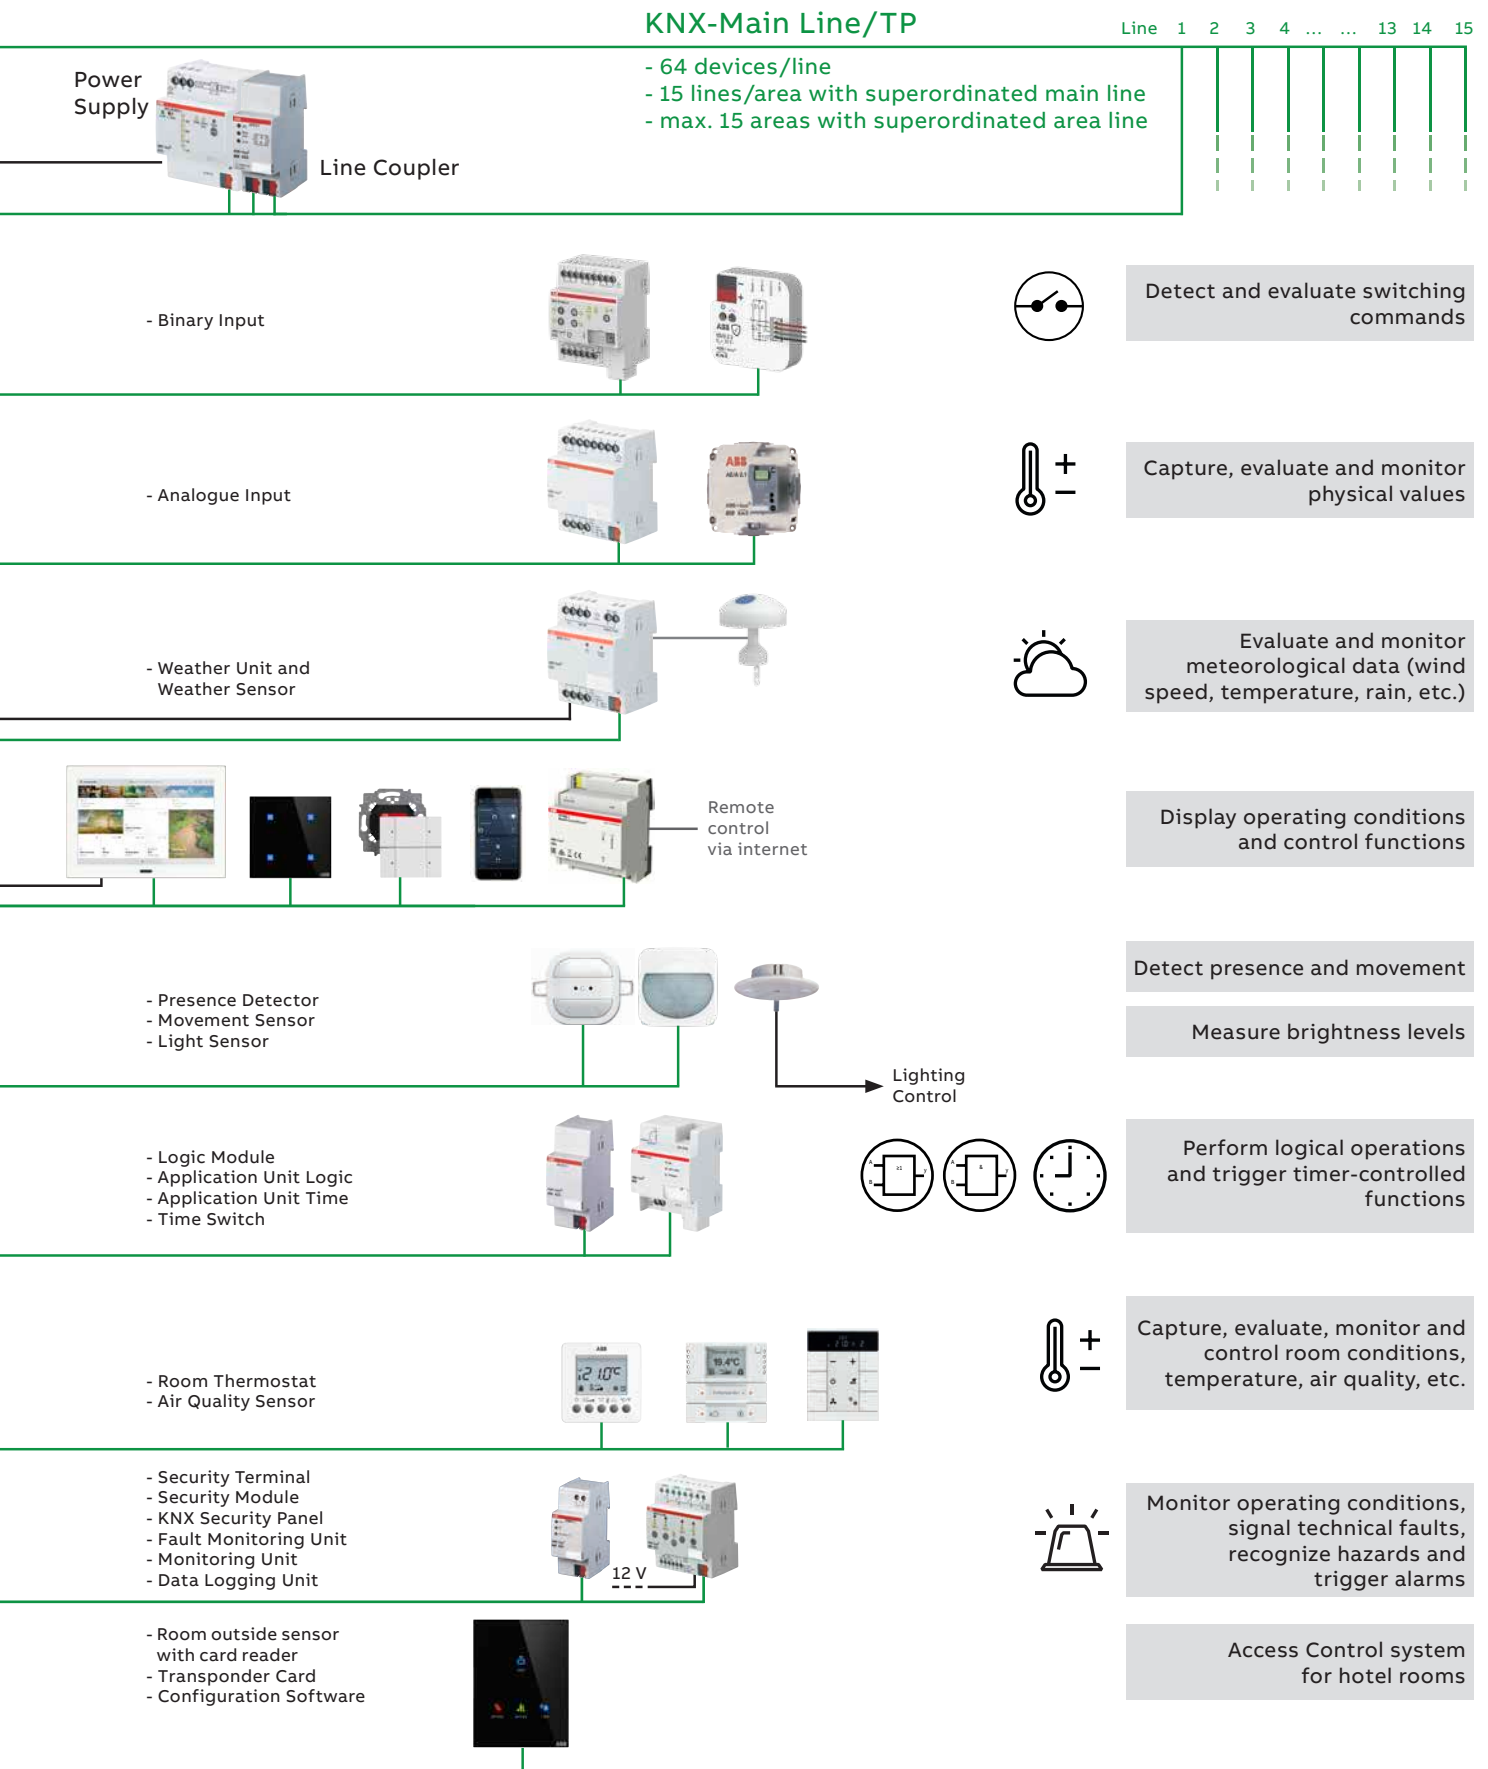


ABB i-bus® KNX

Power Supply

	Standard			Diagnostic		Uninter- ruptible SU/S
	SV/S 30.160.1.1	SV/S 30.320.1.1	SV/S 30.640.3.1	SV/S 30.320.2.1	SV/S 30.640.5.1	30.640.2
General						
Supply voltage	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (210...240 V AC)
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	4	4	4	4	4	8
Rated current I _n	160 mA	320 mA	640 mA	320 mA	640 mA	640 mA
Rated voltage U _n	30 V DC	30 V DC	30 V DC	30 V DC	30 V DC	30 V DC
Back-up						
Mains failure back-up time without battery	200 ms	200 ms	200 ms	200 ms	200 ms	200 ms
Mains failure back-up time with new, fully charged battery up to	–	–	–	–	–	AM/S: 10 min SAK7: 2.5 h 2 x SAK7: 5 h 2 x SAK12: 11 h 2 x SAK7: 16 h
Choke						
Integrated choke	■	■	■	■	■	■
Extra Voltage output without choke (30 V DC)	–	–	■	–	■	–
Operation and indication						
Short-circuit and overload indication	■	■	■	■	■	■
Output voltage indication	■	■	■	■	■	■
Overload indication	■	■	■	■	■	■
Bus current indication	–	–	–	■	■	–
Telegram traffic indication	–	–	–	■	■	–
Communication error indication	–	–	–	■	■	–
Bus reset button and indication	–	–	–	■	■	–
Mains voltage indication	■	■	■	■	■	■
Battery voltage indication	–	–	–	–	–	■
Reporting						
Floating contact for fault reporting	–	–	–	–	–	■
Commissioning and diagnostic functions						
Control and diagnosis via ABB i-bus® Tool	–	–	–	■	■	–

■ = Function is supported

– = Function is not supported



SV/S 30.160.1.1

Power Supply, 160 mA, MDRC

KNX power supplies generate and monitor the KNX system voltage (SELV). The bus line is decoupled from the power supply by an integrated choke.

The voltage output is short-circuit and overload protected.

The two-color LED indicates device output status. With two-coloured status indicator and wide range input from 85...265 V AC, 50/60 Hz.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.160.1.1	2CDG110144R0011		0.30	1



SV/S 30.320.1.1

Power Supply, 320 mA, MDRC

KNX power supplies generate and monitor the KNX system voltage (SELV). The bus line is decoupled from the power supply by an integrated choke.

The voltage output is short-circuit and overload protected.

The two-color LED indicates device output status.

With two-coloured status indicator and wide range input from 85...265 V AC, 50/60 Hz.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.320.1.1	2CDG110166R0011		0.30	1



SV/S 30.640.3.1

Power Supply, 640 mA, MDRC

KNX power supplies generate and monitor the KNX system voltage (SELV). The bus line is decoupled from the power supply by an integrated choke. The voltage output is short-circuit and overload protected.

The two-color LED indicates device output status.

Device type SV/S 30.640.3.1 has an additional 30 V DC short-circuit and overload protected voltage output that can be used to power an additional bus line (in combination with a separate choke).

With two-coloured status indicator and wide range input from 85...265 V AC, 50/60 Hz.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.640.3.1	2CDG110167R0011		0.30	1

ABB i-bus® KNX

Power Supply



SV/S 30.320.2.1

Power Supply with Diagnostics, 320 mA, MDRC

Compact Power Supply with integrated choke. Quick diagnostics by LED display and ETS communication objects. Analysis of the operating state and the bus line possible by means of ABB i-bus® Tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.320.2.1	2CDG110145R0011		0.26	1



SV/S 30.640.5.1

Power Supply with Diagnostics, 640 mA, MDRC

Compact Power Supply with integrated choke. Quick diagnostics by LED display and ETS communication objects. Analysis of the operating state and the bus line possible by means of ABB i-bus® Tool. Additional voltage output to supply an additional line in conjunction with an additional choke.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.640.5.1	2CDG110146R0011		0.26	1



SU/S 30.640.2

Uninterruptible KNX Power Supply, 640 mA, MDRC

Uninterruptible power supply 640 mA with integrated choke for supplying an ABB i-bus® KNX bus line, short-circuit- and overload-proof. LEDs to indicate the status of the bus current, mains voltage, and battery voltage. Wide range input from 85...265 V AC, 50/60 Hz. The accumulator module AM/S 12.1 or up to 2 rechargeable batteries can be charged in normal operation by the voltage supply. The bus voltage is provided utilising the batteries in the event of a mains failure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	SU/S 30.640.2	2CDG110275R0011		0.40	1



AM/S 12.1

Battery Module, 12 V DC, MDRC

With lead-gel battery for use in uninterruptible power supply SU/S 30.640.2 and for maintaining the bus voltage during a mains failure for 10 minutes (at full load). Connection is made via 4-core standard cable.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	AM/S 12.1	GHQ6310062R0111		0.81	1



KS/K 4.1



KS/K 2.1

Cable Sets

For connection of sealed lead gel batteries SAK7, SAK12 and SAK17 to the uninterruptible KNX power supply SU/S 30.640.2 or the uninterruptible power supply NTU/S 12.2000.1. If only one battery is connected, the basic cable set KS/K 4.1 with integrated temperature sensor is to be used. In case two batteries are connected in parallel, the basic cable set KS/K 4.1 is to be used for the first battery and the extension cable set KS/K 2.1 is to be used for the second battery. It is not permitted to connect more than two batteries in parallel.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Basic	–	KS/K 4.1	GHQ6301910R0001		0.18	1
Extension	–	KS/K 2.1	GHQ6301910R0011		0.12	1



DR/S 4.1

Choke, MDRC

The device can be used together with a SV/S 30.640.5.1 or SV/S 30.640.3.1 to supply a second line. The device has a reset switch for isolating the bus voltage and resetting the bus devices connected to this line. Connection to ABB i-bus® via Bus Connection Terminal.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	DR/S 4.1	2CDG110029R0011		0.16	1



NTI/Z 28.30.1

Commissioning Power Supply, 28 V DC, 30 mA

For temporary power supply of KNX devices during commissioning. The Euroconnector and plug-in terminal provide faster connection and supply of devices with manual operation (e.g. FCC/S or SA/S).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	NTI/Z 28.30.1	2CDG110096R0011		0.14	1

ABB i-bus® KNX

Power Supply



CP-D 24/2.5

Power Supply Units, MDRC

The supply units that can be used universally as auxiliary power supply in KNX installations or other SELV applications. The devices supply a regulated output voltage of 12 V DC or 24 V DC with a maximum output current of 0.42 A up to 4.2 A. The units are protected against overload, the output being able to sustain a continuous short circuit. LED indication of the status of the supply and output voltage. With a width between one to five modules only, the CP-D range power supplies are ideally suited for the installation in distribution panels. Optimised for world-wide applications: The CP-D power supplies can be supplied with a rated voltage of 100 – 240 V AC.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
12 V DC, 0.83 A	1	CP-D 12/0.83	1SVR427041R1000		0.07	1
12 V DC, 2.1 A	3	CP-D 12/2.1	1SVR427043R1200		0.20	1
24 V DC, 0.42 A	1	CP-D 24/0.42	1SVR427041R0000		0.07	1
24 V DC, 1.3 A	3	CP-D 24/1.3	1SVR427043R0100		0.20	1
24 V DC, 2.5 A	4	CP-D 24/2.5	2CDG120037R0011		0.25	1
24 V DC, 4.2 A	5	CP-D 24/4.2	1SVR427045R0400		0.39	1
Redundancy Unit for decoupling of two CP-D power supply units	2	CP-D RU	1SVR427049R0000		0.08	1



NTU/S 12.2000.1


Uninterruptible Power Supply, 12 V DC, 2 A, MDRC

Delivers sufficient power for all types of demanding applications with a buffered output voltage of 12 V DC (SELV) and a maximum output current of 2 A. Operating malfunctions of the power supply are signalled via a changeover contact and can be sent for evaluation purposes. Up to two 12 V DC sealed lead-acid batteries (gel cell) can be connected in parallel with the power supply, in conjunction with the KS/K 4.1 and KS/K 2.1 cable sets, or the AM/S 12.1 battery module.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	NTU/S 12.2000.1	2CDG110070R0011		0.43	1

KNX Line Coupler Secure

Security in Buildings

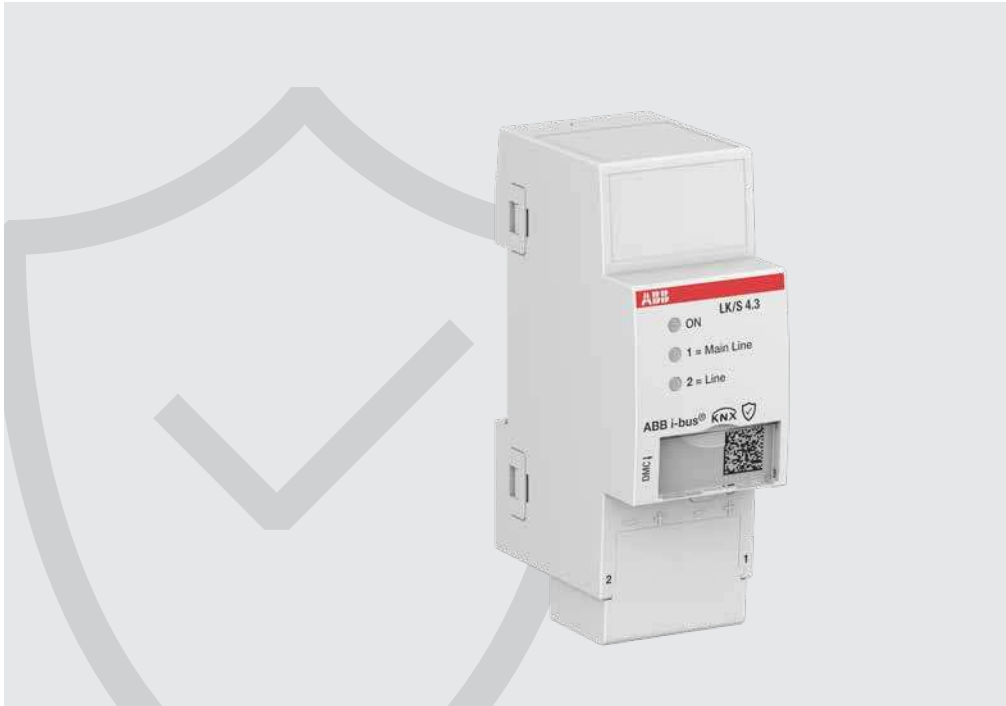

Smart technologies, also in home and building automation, can present potential vulnerabilities that may be exploited. Increasing security requirements in building projects means protection against unauthorized configuration and manipulation, security of transmitted data, fail-safe operation of building functions and sustainable control over the entire building installation.

- Cyber Resilience Act (EU) introduces mandatory cyber security requirements for hardware and software products with digital components
- Protecting devices in KNX installations will be an increasing challenge for planners, installers and manufacturers

The KNX Secure Standard has been developed by the KNX Association to respond to the current and future challenges regarding cyber security in building automation.

ABB is constantly expanding its portfolio of KNX Secure devices to meet the requirements of secure building automation. One of the latest achievements: **KNX Line Coupler Secure**.

Benefits



Secure Communication

The Line Coupler Secure supports the functions **KNX Segment Coupler** and **Secure Proxy**. Standard communication is filtered, encrypted and converted into a secure communication (KNX Data Secure). Use the Line Coupler Secure to upgrade an existing KNX installation to increase security level of the installation



Flexibility during commissioning

Freely decide if the device should be used as a **Line Coupler**, **Segment Coupler** or **Area Coupler**

ABB i-bus® KNX

System Infrastructure and Interfacing

	IP Router IPR/S 3.1.1		IP Router Secure IPR/S 3.5.1	IP Interface IPS/S 3.1.1		IP Interface Secure IPS/S 3.5.1	Line Coupler Secure LK/S 4.3
General							
Auxiliary voltage	10...30 V DC or PoE IEEE 802.3af class 1		10...30 V DC or PoE IEEE 802.3af class 1	10...30 V DC or PoE IEEE 802.3af class 1		10...30 V DC or PoE IEEE 802.3af class 1	–
Type of installation	DIN-Rail		DIN-Rail	DIN-Rail		DIN-Rail	DIN-Rail
Application	IP Router/ 1.1	IP Router/ 2.0	IP Router Secure/ 1.0	IP Interface/ 1.1	IP Interface/ 2.0	IP Interface Secure/ 1.0	Line/Area/ Segment Coupler Secure/1.0
ETS	ETS 3	ETS 4/5	ETS 5	ETS 3	ETS 4/5	ETS 5	ETS 5/6
Software functions							
KNX Secure	–	–	■	–	–	■	■
Secure Proxy	–	–	–	–	–	–	■
Number of tunneling servers	1	5	5	1	5	5	–
Number of unicast connections	10	10	10	–	–	–	–
Monitoring of bus voltage failure	■	■	■	–	–	–	–
Filter Group telegrams main group 0...13	■	■	■	–	–	–	■
Filter Group telegrams main group 14...31	–	■ (ETS 4.1.7 or higher)	■ (ETS 5.7.x or higher)	–	–	–	■
Function Repeater	–	–	–	–	–	–	■ ¹⁾
Segment Coupler	–	–	–	–	–	–	■
Commissioning and diagnostic functions							
Control and diagnosis via ABB i-bus® Tool	■	■	■	■	■	■	–
Firmware update (ABB i-bus® Tool or ETS App)	■	■	■	■	■	■	■
Unicast parameterization (ABB i-bus® Tool)	■	■	■	–	–	–	–

■ = Function is supported

– = Function is not supported

1) Function Repeater available with Application "Couple repeat/2.1"



LK/S 4.3

Line Coupler Secure, MDRC

NEW

The line coupler is used in larger installations to connect KNX lines or areas. The lines or areas are galvanically isolated from one another. Telegrams can be filtered to simultaneously reduce the telegram traffic between lines or areas. The device supports long frames (from > ETS5) and KNX Data Secure communication. KNX Data Secure telegrams are processed, filtered, forwarded, or blocked depending on settings. From ETS 6, the device can also be used as segment coupler to connect line segments with each other (incl. filter function). As Secure Proxy it connects KNX standard (not secured) with KNX data secure lines or line segments. Downwards compatible with LK/S 4.2.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	LK/S 4.3	2CDG110310R0011		0.1	1



IPR/S 3.5.1

IP Router Secure, MDRC

Connects the KNX bus with the Ethernet network and encrypts communication on the IP backbone. The device uses the KNXnet/IP Secure protocol for communication (Routing and Tunneling). It can be used as a fast line and area coupler. The full filter table for main groups 0-31 is supported. KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Secure Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12...30 V DC or PoE (IEEE 802.3af class 1). The KNX Standard Communication (Multicast) can be switched off. In this case, up to 10 IPR/S 3.5.1 can communicate using unicast communication. The device supports long frames (from > ETS5). KNX Data Secure telegrams are processed, filtered, forwarded or blocked depending on settings.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPR/S 3.5.1	2CDG110176R0011		0.11	1

ABB i-bus® KNX

System Infrastructure and Interfacing



IPR/S 3.1.1

IP Router, MDRC

Connects the KNX bus with the Ethernet network. The device uses the KNXnet/IP protocol for communication (Routing and Tunneling). It can be used as a fast line and area coupler. The full filter table for main groups 0-31 is supported. KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12...30 V DC or PoE (IEEE 802.3af class 1). The KNX Standard Communication (Multicast) can be switched off. In this case, up to 10 IPR/S 3.1.1 can communicate using unicast communication. The device supports Long Frames which allows faster download and download of KNX Secure devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPR/S 3.1.1	2CDG110175R0011		0.11	1



IPS/S 3.5.1

IP Interface Secure, MDRC

Connects the KNX bus with the Ethernet network and encrypts communication. The device uses the KNXnet/IP Secure protocol for communication (Tunneling). KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Secure Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12...30 V DC or PoE (IEEE 802.3af class 1). The device supports long frames (from > ETS5). KNX Data Secure telegrams can be forwarded.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPS/S 3.5.1	2CDG110204R0011		0.11	1



IPS/S 3.1.1

IP Interface, MDRC

Connects the KNX bus with the Ethernet network. The device uses the KNXnet/IP protocol for communication (Tunneling). KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12...30 V DC or PoE (IEEE 802.3af class 1). The device supports Long Frames which allows faster download and download of KNX Secure devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPS/S 3.1.1	2CDG110177R0011		0.11	1



IS/S 8.1.1

IP Switch, 8 Ports, Fast Ethernet, MDRC**To be discontinued**

The IP Switch is an industrial-grade, 8 Ports, Fast Ethernet (100 Mbit/s), unmanaged switch with plug-and-play capabilities, designed for installation in electrical distribution boards and small housings for rapid mounting on 35 mm DIN rails (to EN 60715).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	IS/S 8.1.1	2CDG120082R0011		0.25	1



ISP/S 8.1.1.1

IP Switch PoE, 8 Ports, Fast Ethernet, 55 W, MDRC**To be discontinued**

The IP Switch PoE is an industrial-grade, 8 Ports, Fast Ethernet (100 Mbit/s), PoE (55 W), unmanaged switch with plug-and-play capabilities, designed for installation in electrical distribution boards and small housings for rapid mounting on 35 mm DIN rails (to EN 60715).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	12	ISP/S 8.1.1.1	2CDG120083R0011		0.41	1



IPM/S 1.1

IP Patch Module, MDRC

The IP Patch Module consists of an RJ-45 module and a mounting adapter for rail mounting.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	1	IPM/S 1.1	2CDG120036R0011		0.1	1



USB/S 1.2

USB Interface, MDRC

Connects the KNX installation with PC software clients such as ETS or visualisations (programming, bus monitor, group monitor). The device supports Long Frames which allows faster download and download of KNX Secure devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	USB/S 1.2	2CDG110243R0011		0.08	1



LL/S 1.1

Optical Fibre Interface, MDRC

The device is used to couple two sections of an bus line using an optical fibre link. Ideal for bridging longer distances or to avoid having to implement lightning and overvoltage protection when laying cables between buildings. Two devices are needed to complete a transmission link.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	LL/S 1.1	GHQ6050053R0001		0.28	1

ABB i-bus® KNX

System Infrastructure and Interfacing



MG/S 11.100.1.1

Modbus RTU Client – KNX TP Gateway, 100 Points, MDRC

The Modbus KNX Gateway integrates Modbus RTU server devices with KNX installations at field level. The devices support standard KNX data point types (DPTs) and up to 100 data points. The device is put into operation with the ETS. An optional, free-of-charge ETS app (DCA) is available to facilitate the configuration, allowing to export, and import Modbus-KNX mapping in the form of templates. Modbus component templates are also be available for download from a database. Auxiliary voltage is not required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	MG/S 11.100.1.1	2CDG120089R0011		0.82	1

ABB i-bus® KNX

Connection and Wiring



DSM/S 1.1

Diagnosis and Protection Module, MDRC

Enables quick diagnosis of the bus state and indicates telegram traffic via an LED. A bus fault is indicated by contacts. The DSM also suppresses transient overvoltages and interference voltage spikes on the bus and thus protects the connected devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	DSM/S 1.1	2CDG110060R0011		0.11	1



SPD/S 1.1

Surge Protective Device

KNX surge protective devices are capable of discharging direct and indirect lightning strikes causing induced or conducted overvoltages between lines (differential) and lines to ground (common mode) and are safely kept well below the withstand voltages of the KNX system. They are installed between buildings or KNX zones to provide safe isolation from surges. End of life protection indication is provided from the pushbutton, simply depress the pushbutton and make sure green indicator illuminates. If no indication then replacement is required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	SPD/S 1.1	7TCA085400R0448		0.1	1



VB/K ...

Wiring Jumpers

For the interconnection of devices with a bus connection terminal. The vertical and horizontal versions are matched to typical wiring applications.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
horizontal, 100 mm	–	VB/K 100.1	GHQ6301908R0003		0.06	10
horizontal, 200 mm	–	VB/K 200.1	GHQ6301908R0001		0.07	10
vertical, 270 mm	–	VB/K 270.1	GHQ6301908R0002		0.11	10
vertical, 360 mm	–	VB/K 360.1	GHQ6301908R0004		0.16	10



PS 1/4/6-KNX

Busbars

Busbar for connection several floating supply contacts of a device (e.g. SD/S, SA/S, ...). Reducing the wiring effort and create a secure load-connection. The PS1/4/6 is ready assembled and can be used immediately. The PS 1/60/6 is cut to the required length and closed with the end cap PS-END 1-S.



PS-END 1-S

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1 Phase, 4 Contacts	–	PS 1/4/6-KNX	2CDG924003R0011		0.012	10
1 Phase, 60 Contacts	–	PS 1/60/6-KNX	2CDG924004R0011		0.11	1
End Cap for busbar	–	PS-END 1-S	2CDL000001R0001		0.001	25

ABB i-bus® KNX

Connection and Wiring



US/E 1

Connection Terminals

For connecting bus devices as well as for looping through or branching the bus cable.

Available in black/red for use as bus connecting terminal, in blue as bus connecting terminal with surge protector and in white/yellow for use as a connecting terminal.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Bus Connection Terminal, 50 Pieces, black/red	–	BUSKLEMME	GHQ6301901R0001		0.01	50
Connection Terminal, 50 Pieces, white/yellow	–	KLEMME	GHQ6301902R0001		0.01	50
Connection Terminal with Surge Arrester	–	US/E 1	GHQ6310009R0001		0.01	1



STR/Z 1.50.1

Label Carrier for DIN-rail Devices, 50 Pieces

Snap-on label carrier consisting of transparent carrier plate and insertable blank paper labels.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	STR/Z 1.50.1	2CDG110149R0011		0.04	50

ABB i-bus® KNX

Multifunction Room Automation –
Room Controller

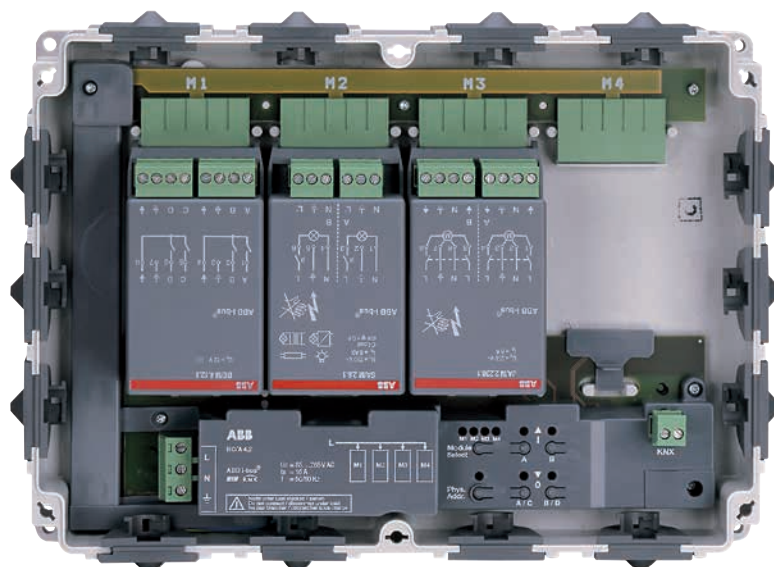


ABB i-bus® KNX

Multifunction Room Automation – Room Controller

The fundamental principle:

One device per room

A single Room Controller controls all the room functions.

This “one device per room” principle economically and flexibly provides KNX functionality: With 4 or 8 modules, which are simply inserted into the basis device, all loads in this room (lights, blinds, heating, etc.) can be controlled.

Economic security from the outset

The installation concept of the Room Controller, particularly the simple plug-in module concept, provides security and reliability.

• When planning the infrastructure of a building:


- It can be undertaken without exact knowledge of the subsequent user demands.

• During commissioning:

- When user demands have been determined, they are implemented by simple insertion of modules.

• In operation in a building:

- Modifications to the room utilisation are easy to implement.
- The changes to the cable routing are limited to the room concerned.

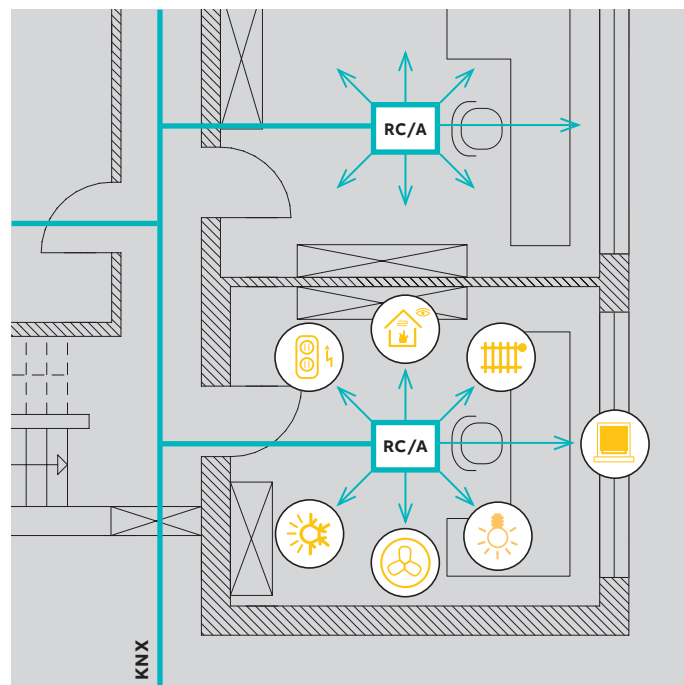

Improved fire protection included

The significant reduction in the wiring also considerably reduces the fire load and thus improves safety for persons and assets.

Save on energy and not on comfort

Each room is used differently. The different module assignments of the Room Controller can be configured accordingly.

Just three examples of special building functions that can be implemented with the device.

In the lighting sector

Constant lighting control is not the only conceivable solution. A high level of comfort can be assured by the control of different light scenes.

Blinds and roller shutters

Not only do they provide pleasant shading, they also assist in responsible use of energy. Intelligent facade controls move the blinds to suit the position of the sun.

Heating/Ventilation/Air conditioning

The control of electrothermal valves on radiators is no problem for the “electronic switch actuator” module of the Room Controller. The ventilation can also be integrated into this automatic control.

Overview of switching performance

	SA/M 2.6.1	SA/M 2.16.1	SD/M 2.6.2	LR/M 1.6.2	ES/M 2.230.1	ES/M 2.24.1
Outputs						
Load circuits	2 relay outputs	2 relay outputs, floating	2 relay outputs	1 relay output	2 semi-conductor outputs for resistive loads, inrush current: max. 1 A, continuous current: max. 700 mA	2 semi-conductor outputs for resistive loads, inrush current: max. 1 A, continuous current: max. 700 mA
U _n rated voltage	250/440 V AC	250/440 V AC	250/440 V AC	250/440 V AC	115/230 V AC	24 V AC/DC
I _n rated current	6 AX	16 A	6 AX	6 AX	700 mA	700 mA
Control outputs	–	–	2 x 1...10 V DC (passive)	1 x 1...10 V DC (passive)	–	–
Max. control current	–	–	30 mA	30 mA	–	–
Max. cable length	–	–	100 m	100 m	–	–
Switching current per output						
AC3 operation (cos φ = 0.45) EN 60 947-4-1	6 A/230 V	8 A/230 V	6 A/230 V	6 A/230 V	–	–
AC1 operation (cos φ = 0.45) EN 60 947-4-1	6 A/230 V	16 A/230 V	6 A/230 V	6 A/230 V	–	–
Fluorescent lighting load AX to EN 60 669	6 A/250 V (70 μ F)	16 A/250 V (70 μ F)	6 A/250 V (70 μ F)	6 A/250 V (70 μ F)	–	–
Minimum switching capacity	100 mA/12 V 100 mA/24 V	100 mA/12 V 100 mA/24 V	100 mA/12 V 100 mA/24 V	100 mA/12 V 100 mA/24 V	–	–
DC current switching capacity (resistive load)	6 A/24 V=	16 A/24 V=	6 A/24 V=	6 A/24 V=	–	–

—
– = Not applicable

ABB i-bus® KNX

Multifunction Room Automation – Room Controller

Overview of switching performance


	SA/M 2.6.1	SA/M 2.16.1	SD/M 2.6.2	LR/M 1.6.2	ES/M 2.230.1	ES/M 2.24.1
Lamp loads at 230 V AC						
– Incandescent lamp load	1380 W	2300 W	1380 W	1380 W	–	–
Fluorescent lamps T5/T8						
– Uncompensated	1380 W	2300 W	1380 W	1380 W	–	–
– Parallel compensated	1380 W	1500 W	1380 W	1380 W	–	–
– DUO connection	1380 W	1500 W	1380 W	1380 W	–	–
Low-volt halogen lamps						
– Inductive transformer	1200 W	1200 W	1200 W	1200 W	–	–
– Electronic transformer	1380 W	1500 W	1380 W	1380 W	–	–
– Halogen lamp 230 V	1380 W	2300 W	1380 W	1380 W	–	–
Dulux lamp						
– Uncompensated	1100 W	1100 W	1100 W	1100 W	–	–
– Parallel compensated	1100 W	1100 W	1100 W	1100 W	–	–
Mercury-vapour lamp						
– Uncompensated	1380 W	2000 W	1380 W	1380 W	–	–
– Parallel compensated	1380 W	2000 W	1380 W	1380 W	–	–
Switching capacity						
– Max. peak inrush-current I_p (150 μ s)	400 A	400 A	400 A	400 A	–	–
– Max. peak inrush-current I_p (250 μ s)	320 A	320 A	320 A	320 A	–	–
– Max. peak inrush-current I_p (600 μ s)	200 A	200 A	200 A	200 A	–	–
Number of electronic ballasts (T5/T8, single element)						
– 18 W (ABB EVG 1x18 CF)	23	23	23	23	–	–
– 24 W (ABB EVG-T5 1x24 CY)	23	23	23	23	–	–
– 36 W (ABB EVG 1x36 CF)	14	14	14	14	–	–
– 58 W (ABB EVG 1x58 CF)	11	11	11	11	–	–
– 80 W (Helvar EL 1x80 SC)	10	10	10	10	–	–

Further technical specifications can be found in the corresponding product manuals at www.abb.com/knx

– = Not applicable

ABB i-bus® KNX

Multifunction Room Automation –
Room Controller Basis Devices



Configuration example

Room Controller

The Room Controller controls all the functions in the room as a central device. Due to its modular design, it can be adapted flexibly to the required functionality. On-site installation enables short assembly and commissioning times. A structured cable entry creates clarity and flexibility for changes in function – both during planning and operation.

Special features

- Height 50 mm: optimised for underfloor installation or suspended ceilings
- Room Controller counts as just one bus device
- Robust housing, IP 54 degree of protection
- Manual operation for immediate testing – even without bus voltage
- Comprehensive software functionality



RC/A 4.2

Room Controller, Basis Device for 4 Modules, SM

It accommodates up to 4 plug-in modules and controls their functions. The RC/A 4.2 communicates as a bus device. Any module type can be plugged into each module slot. A manual control for module function test is integrated.

Dimensions (H x W x D): 200 mm x 275 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RC/A 4.2	2CDG110104R0011		0.98	1



RC/A 8.2

Room Controller, Basis Device for 8 Modules, SM

It accommodates up to 8 plug-in modules and controls their functions. Any module type can be plugged into each module slot. The inserted module is automatically detected.

The manual operation facility enables an immediate function test even when bus voltage is not applied. Dimensions (H x W x D): 270 mm x 316 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RC/A 8.2	2CDG110106R0011		1.695	1

ABB i-bus® KNX

Multifunction Room Automation – Room Controller Function Modules



BE/M 4.230.1

Binary Input Modules, 4-fold

Each of the modules provides 4 inputs. There are 3 module types available for the connection of 115/230 V, 12/24 V (AC or DC) or floating contacts to cover all demands.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
230 V	–	BE/M 4.230.1	2CDG110005R0011		0.13	1
12/24 V	–	BE/M 4.24.1	2CDG110006R0011		0.13	1
Contact Scanning	–	BE/M 4.12.1	2CDG110007R0011		0.13	1



SA/M 2.6.1

Switch Actuator Module, 2-fold, 6 A

For switching loads up to 16 A at a maximum continuous current of 6 A.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SA/M 2.6.1	2CDG110002R0011		0.17	1



SA/M 2.16.1

Switch Actuator Module, 2-fold, 16 A

Switches up to 16 A with two floating relay contacts. The feeding voltage is independent from the Room Controller Basis Device. It must thus be applied directly to the module.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SA/M 2.16.1	2CDG110100R0011		0.16	1



JA/M 2.230.1

Shutter Actuator Modules, 2-fold

For controlling two independent blind or shutter drives. There are two module types available for 115/230 V AC or 24 V DC drives.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
230 V AC	–	JA/M 2.230.1	2CDG110003R0011		0.17	1
24 V DC	–	JA/M 2.24.1	2CDG110004R0011		0.17	1



SD/M 2.6.2

Switch/Dim Actuator Module, 2-fold, 6 AX

It enables the switching and dimming of two groups of luminaries in conjunction with electronic ballasts via a 1...10 V control voltage.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SD/M 2.6.2	2CDG110107R0011		0.17	1



LR/M 1.6.2

Light Controller Module, 1-fold, 6 AX

Enables the switching and dimming of one group of luminaires via a 1...10 V control voltage. The device can be used for constant lighting control in connection with a Light Sensor LF/U 2.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LR/M 1.6.2	2CDG110108R0011		0.13	1



ES/M 2.230.1

Electronic Switch Actuator Module, 2-fold

With 2 overload-proof outputs for noiseless control of heating systems and chilled ceilings via thermoelectric valve drives. Two module types for voltages from 115/230 V or 24 V (AC or DC) are available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
115/230 V	–	ES/M 2.230.1	2CDG110013R0011		0.15	1
24 V	–	ES/M 2.24.1	2CDG110014R0011		0.15	1

ABB i-bus® KNX

Multifunction Room Automation – Room Master

	Room Master Basic RM/S 1.1	Room Master Premium RM/S 2.1	Room Master RM/S 3.1	Room Master RM/S 4.1
General				
Supply voltage	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	8	12	12	8
Current consumption, bus	< 12 mA	< 24 mA	< 12 mA	< 12 mA
Inputs				
Binary inputs (for potential free contacts via contact scanning)	8	18	12	8
Outputs				
Switching capacity 20 A (16 AX) ¹⁾	1	3	4	–
Switching capacity 16 A (10 AX) ²⁾	2	1	–	–
Switching capacity 6 A ³⁾	3 (configurable as switch or fan outputs)	12 (3 configurable as switch or fan outputs)	–	8
0.5 A electronic (for max. 2 electrothermal or motor valve drive controls)	2	2	–	–
6 A changeover contact (Blind or Shutter control)	–	1	4 (configurable also as switch outputs)	–
Functions				
Lighting control (Switching)	■	■	■	■
Heating/Cooling (Electrothermal or motor valve drive control, 3-level fan speed control)	■	■	■	■
Shading control (Shutter, blinds or curtains)	–	■	–	–
Control of further loads via switched electrical sockets	■	■	■	■
Internal connection of inputs and outputs without group addresses	■	■	■	■
Scenes	■	■	■	■
Room scenarios	■	■	■	■
Application with preconfigured inputs and outputs	■	■	–	–
Programmable with predefined and tested example projects (ETS 4) for different fields of application (office, schools, hotel rooms, ...)	–	–	■	–
Planning templates	–	–	■	–

■ = Function is supported

– = Function is not supported

1) = Switching capacity, see Switch Actuators SA/S x.16.5.1

2) = Switching capacity, see Switch Actuators SA/S x.10.2.1

3) = Switching capacity, see Switch Actuators SA/S x.6.1.1



RM/S 1.1



RM/S 2.1



RM/S 3.1



RM/S 4.1

Room Master

The Room Master is a KNX device with a combination of inputs and outputs. The quantities, technical data and the functions of these inputs and outputs are compiled, so that overall control of all the functions in rooms of a live-in character or apartments, are implemented via a device. Typical areas of application of the Room Master are hotel rooms, hospital rooms as well as apartments in institutions for residential care or in student residential homes. The Room Master with its compact design covers all the basic requirements for Lighting control, Heating/Air conditioning, Shading control (shutters, blinds or curtains – with the RM/S 2.1) and Control of further loads via switched electrical sockets. Function extensions are possible at any time, e.g. devices for dimming via ABB i-bus® KNX.

Overview of the inputs and outputs

	RM/S 1.1	RM/S 2.1	RM/S 3.1	RM/S 4.1	Application possibilities
Binary inputs via contact scanning	8	18	12	8	For connection of switches or push-buttons (light on/off, shutter up/down, etc.) or sensors (window contacts, door contacts, water sensors, condensation water sensors, hotel card readers, etc.)
Outputs 20 A (16 AX)	1	3	4	–	Bathroom fan, switching of electrical sockets
Outputs 16 A (10 AX)	2	1	–	–	Auxiliary electrical heating of fan-coil units (at RM/S 1.1 and 2.1), lighting
Outputs 6 A	3	12	–	8	3-speed fan control (at RM/S 1.1 and 2.1), lighting
Outputs 0.5 A electronic	2	2	–	–	Valve control (heating, cooling) for max. 2 separate valves
Outputs 6 A changeover contact	–	1	4 (configurable as switch outputs too)	–	Blind or roller blind control

- RM/S 1.1 and RM/S 2.1 are preprogrammed ex factory
- RM/S 3.1 and RM/S 4.1 are programmable with predefined and tested example projects (ETS 4) for different fields of application (office, schools, hotel rooms, ...)
- Commissioning of the preprogrammed devices on the construction site without notebook and ETS programming. With the electrical connection all room functions are available.
- Optional functional extensions via integration into KNX networks with ETS software.

Further information about Room Master on www.abb.com/knx

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
				€	kg	pc.
	8	RM/S 1.1	2CDG110094R0011		0.45	1
	12	RM/S 2.1	2CDG110095R0011		0.76	1
	12	RM/S 3.1	2CDG110165R0011		0.55	1
	8	RM/S 4.1	2CDG110170R0011		0.3	1

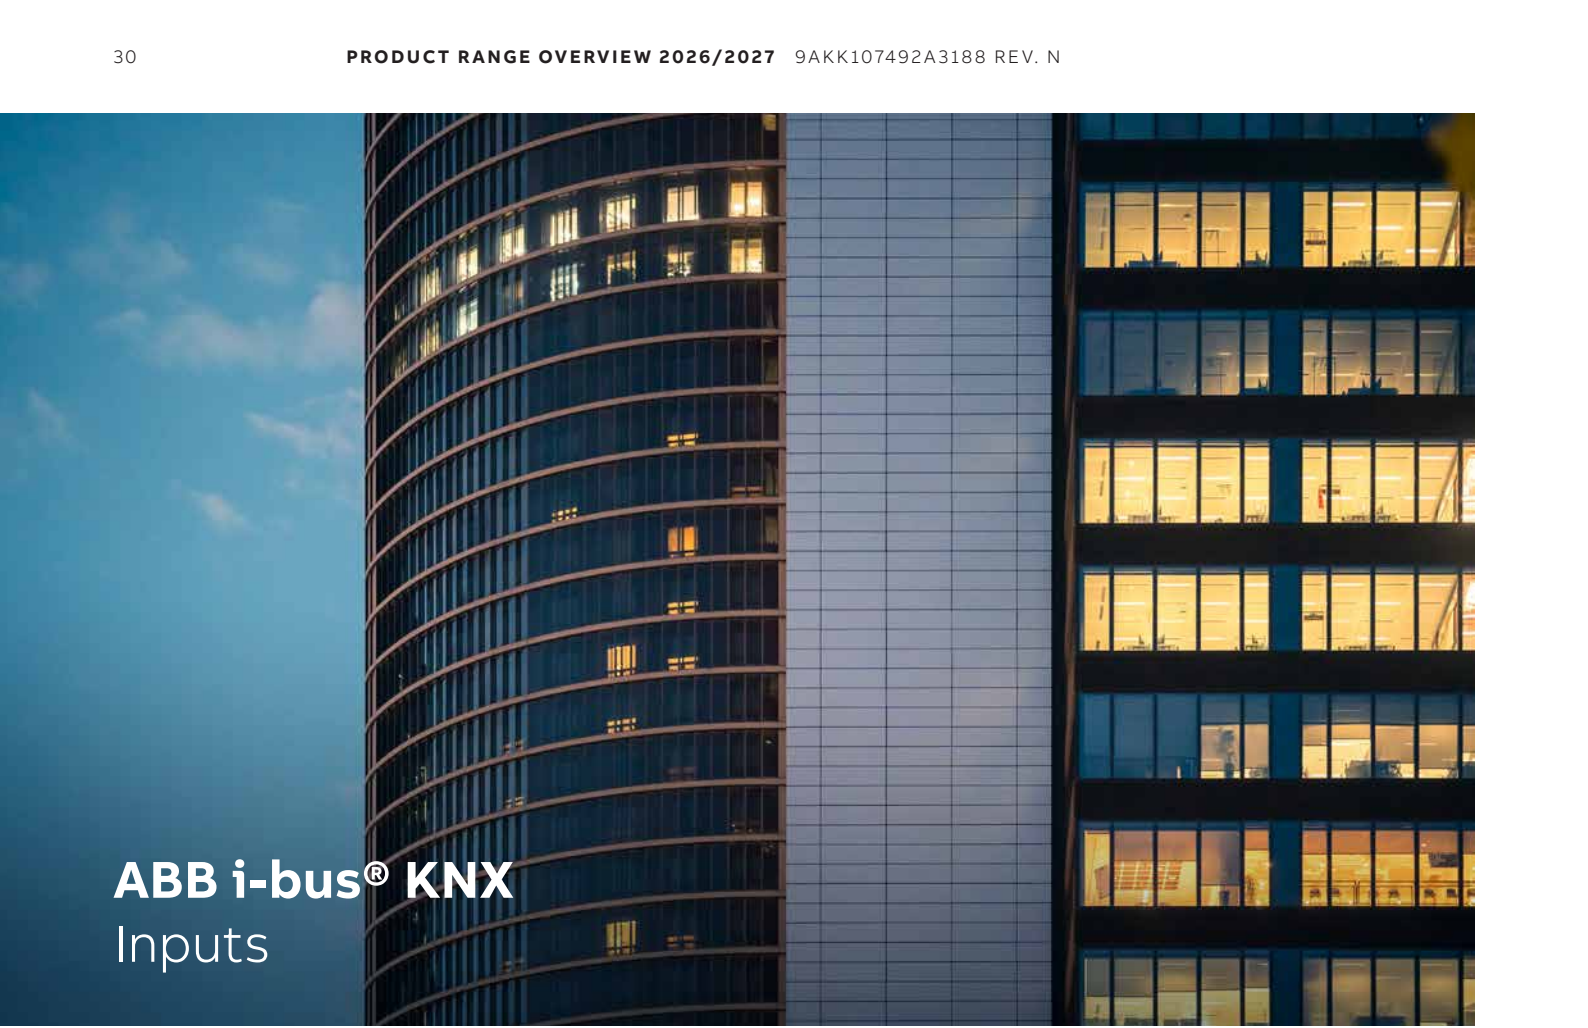


ABB i-bus® KNX Inputs

Wide-range inputs and a streamlined range – The ABB i-bus® KNX Binary Inputs.

ABB i-bus® KNX Binary Inputs serve as an interface for operation of KNX systems via conventional push buttons and switches as well as for processing binary signals (signalling contacts).

These Binary Inputs with wide-range inputs are available with 4, 8, 10, 12 and 16 inputs.

In addition to the five devices with wide-range inputs, the ABB i-bus® KNX Binary Input product range is rounded off by three devices with 4, 10 and 16 inputs with scanning voltage. On these types, a pulsed scanning voltage is provided for connection of floating contacts from the device.

All Binary Inputs feature a **high-quality membrane keypad for comfortable manual operation and display of the device functions**. Input states can be simulated at the device, so that the conventional push buttons, switches or floating contacts do not need to be connected for commissioning purposes. The device functions can be easily tested during commissioning in this way.

The Binary Inputs are powered via the KNX and do not require an additional power supply.

The software functionality of the Binary Inputs has also been extended. It is now possible to send **several switching telegrams with just a single push of a button**.

Especially useful, just as in the case of the Switch Actuators, it is also possible **to copy the channels of the device in the ETS**. The parameters and group addresses of a channel can be simply transferred to other channels in this way. Or it is possible to use the new templates for each application. Both options simplifies project engineering and helps reduce sources of errors and reducing commissioning time.

Application

- Operation of KNX systems via conventional push buttons and switches
- Processing of binary signals (signalling contacts)

Benefits

- Flexible application due to wide-range inputs
- Reduced commissioning time when using the templates or the copy function
- KNX Data Secure
- A wide range of functions
- Simplified complex functions

Products

- BE/S4.20.3.2 Binary Input, 4-fold, Contact Scanning, Manual Operation
- BE/S10.20.3.2 Binary Input, 10-fold, Contact Scanning, Manual Operation
- BE/S16.20.3.2 Binary Input, 16-fold, Contact Scanning, Manual Operation
- BE/S4.230.3.2 Binary Input, 4-fold, 10-230 V, Manual Operation
- BE/S8.230.3.2 Binary Input, 8-fold, 10-230 V, Manual Operation
- BE/S10.230.3.2 Binary Input, 10-fold, 10-230 V, Manual Operation
- BE/S12.230.3.2 Binary Input, 12-fold, 10-230 V, Manual Operation
- BE/S16.230.3.2 Binary Input, 16-fold, 10-230 V, Manual Operation

	BE/S x.20.3.2	BE/S x.230.3.2	US/U x.3	US/U 12.2
General				
Voltage range	–	10...230 V	–	–
Voltage type	–	AC/DC	–	–
Contact scanning	■	–	■	■
Number of Inputs	4, 10, 16	4, 8, 10, 12, 16	2, 4	12
Type of installation	MDRC	MDRC	FM	FM
Module width (space unit)	2, 4, 6	2, 4, 4, 6, 6	–	–
Manual Operation	■	■	–	–
Functions (Device)				
KNX Data Secure	■	■	■	–
Logic functions (AND, OR, XOR)	4, 12, 16	4, 8, 12, 12, 16	4	–
Manual operation	■	■	–	–
Manual operation status	■	■	–	–
Input status	■	■	–	–
Enable/Disable manual operation	■	■	–	–
Enable/Disable inputs	■	■	■	■
Limit number of telegrams	■	■	■	■
Device sends an „In operation“ telegram	■	■	■	–
Filter adjustment	–	■	–	–
Functions (Inputs)				
Switch	■	■	■	■
Switch (2-button)	■	■	■	–
Blind/Shutter	■	■	■	■
Blind/Shutter (2-button)	■	■	■	–
Switch/Dim	■	■	■	■
Switch/Dim (2-button)	■	■	■	–
Scenes	■	■	■	■
Send value/Multiple operation	■	■	■	■
Fault indicator	■	■	■	■
Switching sequence	■	■	■	■
Switching sequence (2-button)	■	■	■	–
Counter	■	■	■	–
S0 signal	–	■	–	–
Switch LEDs	–	–	■	■
Output voltage for LED control	–	–	3,3 V	5 V

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

Inputs



BE/S 10.20.3.2

Binary Input, Contact Scanning, Manual Operation, MDRC

Scans floating contacts with internally generated scanning voltage. The state of the input is displayed via yellow LEDs. The binary inputs enable detection of independent input signals. The devices feature a manual operation pushbutton for each channel. The devices are powered via the ABB i-bus® and do not require an additional power supply. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	2	BE/S 4.20.3.2	2CDG110276R0011		0.08	1
10-fold	4	BE/S 10.20.3.2	2CDG110277R0011		0.15	1
16-fold	6	BE/S 16.20.3.2	2CDG110278R0011		0.20	1




BE/S 16.230.3.2

Binary Input, 10 – 230 V, Manual Operation, MDRC

Detects AC/DC signals in the voltage range from 10...230 V. The state of the input is displayed via yellow LEDs. The binary inputs enable detection of independent input signals. The devices feature a manual operation pushbutton for each channel. The devices are powered via the ABB i-bus® and do not require an additional power supply. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	2	BE/S 4.230.3.2	2CDG110279R0011		0.08	1
8-fold	4	BE/S 8.230.3.2	2CDG110280R0011		0.14	1
10-fold	4	BE/S 10.230.3.2	2CDG110281R0011		0.14	1
12-fold	6	BE/S 12.230.3.2	2CDG110282R0011		0.20	1
16-fold	6	BE/S 16.230.3.2	2CDG110283R0011		0.20	1



US/U 2.3

Universal Interface, FM

The universal interface has 2, 4 or 8 channels which can be parametrised as inputs or outputs with the ETS software. Conventional push-buttons, auxiliary contacts and LEDs can be connected. The connecting cables can be extended up to 10 m. The contact scanning voltage and the supply voltage for the LEDs are made available by the device, the series resistors for the LEDs are integrated. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	–	US/U 2.3	2CDG110308R0011		0.015	1
4-fold	–	US/U 4.3	2CDG110309R0011		0.017	1
8-fold ¹⁾	NEW –	US/U 8.3	2CDG110333R0011		0.022	1

1) Available Q3/2026



US/U 12.2



AE/S 4.1.1.3



AE/A 2.1

Universal Interface, FM

The universal interface has 12 channels which can be parametrised as inputs or outputs with the ETS software. Conventional push-buttons, auxiliary contacts, LEDs and the electronic relay ER/U can be connected. The connecting cables can be extended up to 10 m. The contact scanning voltage and the supply voltage for the LEDs are made available by the device, the series resistors for the LEDs are integrated.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
12-fold	–	US/U 12.2	2CDG110065R0011		0.06	1

Analogue Input

Used wherever analogue variables should be detected. The sophisticated housing concept of the surface mounted device and the screw terminals of the DIN-Rail device enable quick and clear wiring and improve the speed of connection of the sensors. Comprehensive range of adjustment for many typical sensors (1 – 10 V, 0(4) – 20 mA, 0 – 1 V, PT 100, PT 1000,...) for detection of temperature, brightness, fill levels, etc. For active sensors the auxiliary voltage is supplied by AE/S 4.1.1.3; in case of AE/A 2.1 a separate auxiliary voltage supply is required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, MDRC	4	AE/S 4.1.1.3	2CDG110190R0011		0.27	1
2-fold, SM	–	AE/A 2.1	2CDG110086R0011		0.30	1

ABB i-bus® KNX

Inputs



WZ/S 1.3.1.2



WES/A 4.1.1
with WB/Z 1.1.1



WS/S 4.1.1.2

Weather Unit, MDRC and Weather Sensor, SM

It is used to detect and process weather data from weather sensor. It supplies data for twilight and brightness levels in 3 directions, rain, temperature, information on day/night, wind speed, date and time. An additional input for the connection of a PT 1000 sensor is provided. Four value memories which can store up to 24 values each are available. The Weather Unit WZ/S 1.3.1.2 can be operated either with the new Weather Sensor WES/A 4.1.1 or with the former sensors WES/A 3.1 or WES/A 2.1. The Weather Unit also provides the supply voltage for the connected sensor. The Weather Unit has to be supplied with a operating voltage of 85 to 265 V AC. The Weather Unit supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

The Weather Sensor WES/A 4.1.1 detects twilight, brightness in four directions (only three available in combination with WZ/S 1.3.1.2), rain, temperature, day/night, wind speed and the date and time using a GPS module. An additional heating transformer is not required. The new Weather Sensor WES/A 4.1.1 can not be connected to the former Weather Unit WZ/S 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Weather Unit	4	WZ/S 1.3.1.2	2CDG110184R0011		0.20	1
Weather Sensor Basic, SM	–	WES/A 4.1.1	2CDG120091R0011		0.16	1
Wall mounting for Weather Sensor Basic ¹⁾	–	WB/Z 1.1.1	2CDG120088R0011		0.12	1
Wall mounting for Weather Sensor, IP44	–	WB/Z 1.2.1	2CDG120093R0011		0.15	1
Mast Mounting Adapter for Weather Sensor	–	MA/Z 1.50.1	2CDG120094R0011		0.11	1

1) To be discontinued


Weather Station, 4-fold, MDRC

All common weather sensors for wind speed, wind direction, rain, amount of rain, brightness, light intensity, pyranometers, twilight, air pressure, humidity or temperature can be connected to the device. The power supply generates the 24 V DC voltage for external sensors (max. 300 mA). The device can be operated with 85 to 265 V AC, 50/60 Hz. The application software is configured for the detection of weather based data and enables quick sensor programming. The Weather Station supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	WS/S 4.1.1.2	2CDG110191R0011		0.27	1


Outputs

Switch to a smarter tomorrow

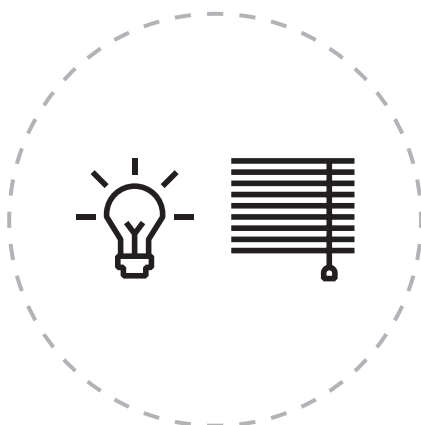

Combi Switch Actuators

The 9 Combi devices are combining two applications: switching and shading. The products are ideally made for residential usage to offer greatest flexibility.

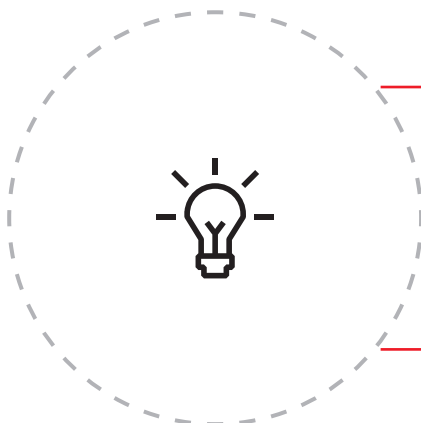

Standard Switch Actuators

These 12 devices are building the Standard when it comes to switching applications for commercial buildings. During the development we focused on providing a cost optimised selection of products, that matches the needs of commercial projects.

Professional Switch Actuators

The professional series includes 8 switch actuators made for high switching capacity. This portfolio has been developed to suit the high requirements of industry standards.

ABB i-bus® KNX

Outputs – Combi Switch Actuators

The following table provides an overview of the functions possible with the Switch Actuators and their application programs:

	SAH/S 8.6.7.1 SAH/S 16.6.7.1 SAH/S 24.6.7.1	SAH/S 8.10.7.1 SAH/S 16.10.7.1 SAH/S 24.10.7.1	SAH/S 8.16.7.1 SAH/S 16.16.7.1 SAH/S 24.16.7.1
Range	Combi	Combi	Combi
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Number of outputs (Switch [Blind])	8 [4]/16 [8]/24 [12]	8 [4]/16 [8]/24 [12]	8 [4]/16 [8]/24 [12]
Module width (space unit)	4/8/12	4/8/12	4/8/12
Manual operation	■	■	■
Switching position indication	■	■	■
I _n rated current (A)	6 A	10 A	16 A
Current measurement	–	–	–
Switch function			
– Central On/Off	■	■	■
– Staircase lighting	■	■	■
– Staircase lighting advance warning	■	■	■
– Change staircase lighting time via group object	■	■	■
– Flashing	■	■	■
– Selection of N.O./N.C. contact	■	■	■
– Switching on/off delay	■	■	■
Energy Function	–	–	–
Load control integration	■	■	■
Priority objects/forced operation/blocking	■	■	■
Function Scene	■	■	■
Blind/shutter function			
– Central up/down/position/stop	■	■	■
– Blind/shutter control	■	■	■
– Wind/Rain/Frost alarm	■	■	■
– Automatic sun protection	■	■	■
– Parameterizable reversing time	■	■	■
– Reference movement	■	■	■
– Travel range limitation	■	■	■
– Adjustable delay time for drives	■	■	■
Function Logic (independent of output)			
– Logic AND function	■	■	■
– Logic OR function	■	■	■
– Logic exclusive OR function	■	■	■
– Gate function	■	■	■
– 1 bit Inverter	■	■	■
Function Threshold (independent of output)	■	■	■
Additional functions			
– Request status values	■	■	■
– Template parameter windows	■	■	■
– Reaction on bus voltage failure/recovery	■	■	■
– Advanced status group objects	■	■	■
– Support i-bus® Tool	■	■	■

■ = Function is supported
– = Function is not supported

The following table provides an overview of the rated values, switching performance, lamp loads or the number of lamps, which can be connected to a contact:

	SAH/S 8.6.7.1 SAH/S 16.6.7.1 SAH/S 24.6.7.1	SAH/S 8.10.7.1 SAH/S 16.10.7.1 SAH/S 24.10.7.1	SAH/S 8.16.7.1 SAH/S 16.16.7.1 SAH/S 24.16.7.1
Range	Combi	Combi	Combi
I_n rated current (A) ²⁾	6 A	10 A ³⁾	16 A ³⁾
U_n rated voltage (V)	230 V AC	230 V AC	230 V AC
AC1 operation (cos φ = 0.8) acc. to EN 60947-4-1	6 A	10 A	16 A
AC3 operation (cos φ = 0.45) acc. to EN 60947-4-1	6 A	6 A	6 A
C-Load switching capacity (200 μF)	–	–	–
Fluorescent lighting load AX acc. to EN 60669-1	6 AX (140 μF) ²⁾	10 AX (140 μF) ²⁾	10 AX (140 μF) ²⁾
Minimum switching capacity	100 mA/12 V	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	6 A/24 V =	6 A/24 V =	6 A/24 V =
Mechanical service life	> 10 ⁶	> 10 ⁶	> 10 ⁶
Electronic endurance to IEC 60947-4-1:			
– Rated current AC1 (240 V/cos φ = 0.8)	100,000	100,000	100,000
– Rated current AC3 (240 V/cos φ = 0.45)	6,000	6,000	6,000
Incandescent lamp load at 230 V AC	1,200 W	1,200 W	1,200 W
Fluorescent lamp T5/T8:			
– Uncorrected	800 W	800 W	800 W
Low-voltage halogen lamps:			
– Inductive transformer	800 W	800 W	800 W
– Electronic transformer	1,000 W	1,000 W	1,000 W
Halogen lamp 230 V	1,000 W	1,000 W	1,000 W
Mercury-vapour lamps:			
– Uncorrected	1,000 W	1,000 W	1,000 W
– Parallel compensated	800 W	800 W	800 W
LED lamps/energy-saving lamps	250 W	250 W	250 W
Rated motor power	1,380 W	1,380 W	1,380 W
Max. peak inrush-current I_p (150 μs)	200 A	200 A	200 A
Max. peak inrush-current I_p (250 μs)	160 A	160 A	160 A
Max. peak inrush-current I_p (600 μs)	100 A	100 A	100 A
Number of ballasts (T5/T8, single element): ¹⁾			
18 W (ABB ballasts 1 x 18 SF)	10 ballasts	10 ballasts	10 ballasts
24 W (ABB ballasts 1 x 24 CY)	10 ballasts	10 ballasts	10 ballasts
36 W (ABB ballasts 1 x 36 CF)	7 ballasts	7 ballasts	7 ballasts
58 W (ABB ballasts 1 x 58 CF)	5 ballasts	5 ballasts	5 ballasts
80 W (Helvar EL 1 x 80 SC)	3 ballasts	3 ballasts	3 ballasts

1) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush-current of the electronic ballasts.

2) = The maximum peak inrush-current may not be exceeded.

3) = Max. load current per device: 8-fold = 100 A, 16-fold = 160 A, 24-fold = 200 A

ABB i-bus® KNX

Outputs – Standard Switch Actuators

The following table provides an overview of the functions possible with the Switch Actuators and their application programs:

	SA/S 2.6.2.2 SA/S 4.6.2.2 SA/S 8.6.2.2 SA/S 12.6.2.2	SA/S 2.10.2.2 SA/S 4.10.2.2 SA/S 8.10.2.2 SA/S 12.10.2.2	SA/S 2.16.2.2 SA/S 4.16.2.2 SA/S 8.16.2.2 SA/S 12.16.2.2
Range	Standard	Standard	Standard
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Number of outputs	2/4/8/12	2/4/8/12	2/4/8/12
Module width (space unit)	2/4/8/12	2/4/8/12	2/4/8/12
Manual operation	■	■	■
Switching position indication	■	■	■
I _n rated current (A)	6 A	10 A	16 A
Current measurement	–	–	–
Switch function			
– Central On/Off	■	■	■
– Staircase lighting	■	■	■
– Staircase lighting advance warning	■	■	■
– Change staircase lighting time via group object	■	■	■
– Flashing	■	■	■
– Selection of N.O./N.C. contact	■	■	■
– Switching on/off delay	■	■	■
Energy Function	–	–	–
Load control integration	■	■	■
Priority objects/forced operation/blocking	■	■	■
Function Scene	■	■	■
Blind/shutter function	–	–	–
Function Logic (independent of output)			
– Logic AND function	■	■	■
– Logic OR function	■	■	■
– Logic exclusive OR function	■	■	■
– Gate function	■	■	■
– 1 bit Inverter	■	■	■
Function Threshold (independent of output)	■	■	■
Additional functions			
– Request status values	■	■	■
– Template parameter windows	■	■	■
– Reaction on bus voltage failure/recovery	■	■	■
– Advanced status group objects	■	■	■
– Support i-bus® Tool	■	■	■

■ = Function is supported
– = Function is not supported

The following table provides an overview of the rated values, switching performance, lamp loads or the number of lamps, which can be connected to a contact:

	SA/S 2.6.2.2 SA/S 4.6.2.2 SA/S 8.6.2.2 SA/S 12.6.2.2	SA/S 2.10.2.2 SA/S 4.10.2.2 SA/S 8.10.2.2 SA/S 12.10.2.2	SA/S 2.16.2.2 SA/S 4.16.2.2 SA/S 8.16.2.2 SA/S 12.16.2.2
Range	Standard	Standard	Standard
I_n rated current (A) ²⁾	6 A	10 A	16 A
U_n rated voltage (V)	230 V AC	230 V AC	230 V AC
AC1 operation (cos φ = 0.8) acc. to EN 60947-4-1	6 A	10 A	16 A
AC3 operation (cos φ = 0.45) acc. to EN 60947-4-1	6 A	8 A	8 A
C-Load switching capacity (200 μF)	–	–	–
Fluorescent lighting load AX acc. to EN 60669-1	6 AX (140 μF) ²⁾	10 AX (140 μF) ²⁾	16 A (140 μF) ²⁾
Minimum switching capacity	100 mA/12 V	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	6 A/24 V =	10 A/24 V =	16 A/24 V =
Mechanical service life	> 3 x 10 ⁶	> 3 x 10 ⁶	> 3 x 10 ⁶
Electronic endurance acc. to IEC 60947-4-1:			
– Rated current AC1 (240 V/cos φ = 0.8)	100,000	100,000	100,000
– Rated current AC3 (240 V/cos φ = 0.45)	30,000	30,000	30,000
– Rated current AC5a (240 V/cos φ = 0.45)	30,000	30,000	30,000
Incandescent lamp load at 230 V AC	1,380 W	2,300 W	2,500 W
Fluorescent lamp T5/T8:			
– Uncorrected	1,380 W	2,300 W	2,500 W
– Parallel compensated	1,380 W	1,500 W	1,500 W
– DUO circuit	1,380 W	1,500 W	1,500 W
Low-voltage halogen lamps:			
– Inductive transformer	1,200 W	1,200 W	1,200 W
– Electronic transformer	1,380 W	1,500 W	1,500 W
Halogen lamp 230 V	1,380 W	2,300 W	2,500 W
Dulux lamps:			
– Uncorrected	1,100 W	1,100 W	1,100 W
– Parallel compensated	1,100 W	1,100 W	1,100 W
Mercury-vapour lamps:			
– Uncorrected	1,380 W	2,000 W	2,000 W
– Parallel compensated	1,380 W	2,000 W	2,000 W
LED lamps/energy-saving lamps	400 W	400 W	400 W
Rated motor power	1,380 W	1,840 W	1,840 W
Max. peak inrush current I_p (150 μs)	400 A	400 A	400 A
Max. peak inrush current I_p (250 μs)	320 A	320 A	320 A
Max. peak inrush current I_p (600 μs)	200 A	200 A	200 A
Number of ballasts (T5/T8, single element): ¹⁾			
18 W (ABB ballasts 1 x 18 SF)	23 ballasts	23 ballasts	23 ballasts
24 W (ABB ballasts 1 x 24 CY)	23 ballasts	23 ballasts	23 ballasts
36 W (ABB ballasts 1 x 36 CF)	14 ballasts	14 ballasts	14 ballasts
58 W (ABB ballasts 1 x 58 CF)	11 ballasts	11 ballasts	11 ballasts
80 W (Helvar EL 1 x 80 SC)	10 ballasts	10 ballasts	10 ballasts

1) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush-current of the electronic ballasts.

2) = The maximum peak inrush-current may not be exceeded.

ABB i-bus® KNX

Outputs – Professional Switch Actuators

The following table provides an overview of the functions possible with the Switch Actuators and their application programs:

	SA/S 2.16.5.2 SA/S 4.16.5.2 SA/S 8.16.5.2 SA/S 12.16.5.2	SA/S 2.16.6.2 SA/S 4.16.6.2 SA/S 8.16.6.2 SA/S 12.16.6.2
Range	Professional	Professional with Energy Function
Type of installation	DIN-Rail	DIN-Rail
Number of outputs	2/4/8/12	2/4/8/12
Module width (space unit)	2/4/8/12	2/4/8/12
Manual operation	■	■
Switching position indication	■	■
I _n rated current (A)	16/20 A C-Load	16/20 A C-Load
Current measurement	–	■
Switch function		
– Central On/Off	■	■
– Staircase lighting	■	■
– Staircase lighting advance warning	■	■
– Change staircase lighting time via group object	■	■
– Flashing	■	■
– Selection of N.O./N.C. contact	■	■
– Switching on/off delay	■	■
Energy Function	–	■
– Current measurement	–	■
– Power calculation	–	■
– Energy consumption calculation	–	■
– Load monitoring	–	■
Load control integration	■	■
Priority objects/forced operation/blocking	■	■
Function Scene	■	■
Blind/shutter function	–	–
Function Logic (independent of output)		
– Logic AND function	■	■
– Logic OR function	■	■
– Logic exclusive OR function	■	■
– Gate function	■	■
– 1 bit Inverter	■	■
Function Threshold (independent of output)	■	■
Additional functions		
– Request status values	■	■
– Template parameter windows	■	■
– Reaction on bus voltage failure/recovery	■	■
– Advanced status group objects	■	■
– Support i-bus® Tool	■	■

■ = Function is supported

– = Function is not supported

The following table provides an overview of the rated values, switching performance, lamp loads or the number of lamps, which can be connected to a contact:

	SA/S 2.16.5.2 SA/S 4.16.5.2 SA/S 8.16.5.2 SA/S 12.16.5.2	SA/S 2.16.6.2 SA/S 4.16.6.2 SA/S 8.16.6.2 SA/S 12.16.6.2
Range	Professional	Professional with Energy Function
I_n rated current (A) ³⁾	16/20 A C-Load	16/20 A C-Load
U_n rated voltage (V)	230 V AC	230 V AC
AC1 operation (cos φ = 0.8) acc. to EN 60947-4-1	20 A	20 A
AC3 operation (cos φ = 0.45) acc. to EN 60947-4-1	16 A	16 A
C-Load switching capacity (200 μF)	20 A	20 A
Fluorescent lighting load AX acc. to EN 60669-1	20 AX (200 μF) ³⁾	20 AX (200 μF) ³⁾
Minimum switching capacity	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	20 A/24 V =	20 A/24 V =
Mechanical service life	> 10 ⁶	> 10 ⁶
Electronic endurance acc. to IEC 60947-4-1:		
– Rated current AC1 (240 V/cos φ = 0.8)	100,000	100,000
– Rated current AC3 (240 V/cos φ = 0.45)	30,000	30,000
– Rated current AC5a (240 V/cos φ = 0.45)	30,000	30,000
Incandescent lamp load at 230 V AC	3,680 W	3,680 W
Fluorescent lamp T5/T8:		
– Uncorrected	3,680 W	3,680 W
– Parallel compensated	2,500 W	2,500 W
– DUO circuit	3,680 W	3,680 W
Low-voltage halogen lamps:		
– Inductive transformer	2,000 W	2,000 W
– Electronic transformer	2,500 W	2,500 W
Halogen lamp 230 V	3,680 W	3,680 W
Dulux lamps:		
– Uncorrected	3,680 W	3,680 W
– Parallel compensated	3,000 W	3,000 W
Mercury-vapour lamps:		
– Uncorrected	3,680 W	3,680 W
– Parallel compensated	3,000 W	3,000 W
LED lamps/energy-saving lamps	650 W	650 W
Rated motor power	3,680 W	3,680 W
Max. peak inrush current I_p (150 μs)	600 A	600 A
Max. peak inrush current I_p (250 μs)	480 A	480 A
Max. peak inrush current I_p (600 μs)	300 A	300 A
Number of ballasts (T5/T8, single element): ²⁾		
18 W (ABB ballasts 1 x 18 SF)	26 ¹⁾ ballasts	26 ¹⁾ ballasts
24 W (ABB ballasts 1 x 24 CY)	26 ¹⁾ ballasts	26 ¹⁾ ballasts
36 W (ABB ballasts 1 x 36 CF)	22 ballasts	22 ballasts
58 W (ABB ballasts 1 x 58 CF)	12 ¹⁾ ballasts	12 ¹⁾ ballasts
80 W (Helvar EL 1 x 80 SC)	12 ¹⁾ ballasts	12 ¹⁾ ballasts

1) = The number of ballasts is limited by the protection with B16/B20 circuit-breakers.

2) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush-current of the electronic ballasts.

3) = The maximum peak inrush-current may not be exceeded.

ABB i-bus® KNX

Outputs – Combi Switch Actuators



SAH/S 8.6.7.1

Switch/Shutter Actuator, 6 A, MDRC

The compact 6 A combi switch actuator has 8, 16 or 24 independent switching relays. The outputs can be used individually via ABB i-bus® KNX for switching electrical loads or in pairs for controlling 230 V AC roller shutter or blind drives (no electromechanically interlocking). The device features a manual operation, which can also be disabled. Via the manual operation the outputs can be operated manually and the switching or driving status is displayed. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
8-fold	4	SAH/S 8.6.7.1	2CDG110244R0011		0.35	1
16-fold	8	SAH/S 16.6.7.1	2CDG110245R0011		0.60	1
24-fold	12	SAH/S 24.6.7.1	2CDG110246R0011		0.83	1



SAH/S 16.10.7.1

Switch/Shutter Actuator, 10 A, MDRC

The compact 10 A combi switch actuator has 8, 16 or 24 independent switching relays. The outputs can be used individually via ABB i-bus® KNX for switching electrical loads or in pairs for controlling 230 V AC roller shutter or blind drives (no electromechanically interlocking). The device features a manual operation, which can also be disabled. Via the manual operation the outputs can be operated manually and the switching or driving status is displayed. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
8-fold	4	SAH/S 8.10.7.1	2CDG110247R0011		0.35	1
16-fold	8	SAH/S 16.10.7.1	2CDG110248R0011		0.60	1
24-fold	12	SAH/S 24.10.7.1	2CDG110249R0011		0.83	1



SAH/S 24.16.7.1

Switch/Shutter Actuator, 16 A, MDRC

The compact 16 A combi switch actuator has 8, 16 or 24 independent switching relays. The outputs can be used individually via ABB i-bus® KNX for switching electrical loads or in pairs for controlling 230 V AC roller shutter or blind drives (no electromechanically interlocking). The device features a manual operation, which can also be disabled. Via the manual operation the outputs can be operated manually and the switching or driving status is displayed. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
8-fold	4	SAH/S 8.16.7.1	2CDG110250R0011		0.35	1
16-fold	8	SAH/S 16.16.7.1	2CDG110251R0011		0.60	1
24-fold	12	SAH/S 24.16.7.1	2CDG110252R0011		0.83	1

ABB i-bus® KNX

Outputs – Standard Switch Actuators



SA/S 2.6.2.2

Switch Actuator, 6 A, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 6 A device is especially suited to switch resistive, inductive or capacitive loads. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
2-fold	2	SA/S 2.6.2.2	2CDG110253R0011		0.20	1
4-fold	4	SA/S 4.6.2.2	2CDG110254R0011		0.29	1
8-fold	8	SA/S 8.6.2.2	2CDG110255R0011		0.50	1
12-fold	12	SA/S 12.6.2.2	2CDG110256R0011		0.72	1



SA/S 8.10.2.2

Switch Actuator, 10 A, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 10 A device is especially suited for loads with high surge currents e.g. fluorescent lighting (AX) acc. EN 60669. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
2-fold	2	SA/S 2.10.2.2	2CDG110257R0011		0.20	1
4-fold	4	SA/S 4.10.2.2	2CDG110258R0011		0.29	1
8-fold	8	SA/S 8.10.2.2	2CDG110259R0011		0.50	1
12-fold	12	SA/S 12.10.2.2	2CDG110260R0011		0.72	1



SA/S 12.16.2.2

Switch Actuator, 16 A, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 16 A device is especially suited for loads with high surge currents e.g. fluorescent lighting (AX) acc. EN 60669. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
2-fold	2	SA/S 2.16.2.2	2CDG110261R0011		0.20	1
4-fold	4	SA/S 4.16.2.2	2CDG110262R0011		0.29	1
8-fold	8	SA/S 8.16.2.2	2CDG110263R0011		0.50	1
12-fold	12	SA/S 12.16.2.2	2CDG110264R0011		0.72	1

ABB i-bus® KNX

Outputs – Professional Switch Actuators




SA/S 4.16.5.2

Switch Actuator, 16 A, C-Load, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 16/20 A, 16 A-AC3 (C-load) device is especially suited for loads with high surge currents e.g. fluorescent lighting (AX) acc. EN 60669. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	2	SA/S 2.16.5.2	2CDG110265R0011		0.21	1
4-fold	4	SA/S 4.16.5.2	2CDG110266R0011		0.31	1
8-fold	8	SA/S 8.16.5.2	2CDG110267R0011		0.55	1
12-fold	12	SA/S 12.16.5.2	2CDG110268R0011		0.79	1



SA/S 12.16.6.2

Switch Actuator, 16 A, C-Load with Energy Function, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via ABB i-bus® KNX. The device has integrated energy functions. This includes independent load current measurement in each output and easy to use calculation of power and energy consumption for each output or groups of outputs. Via an integrated load shedding object an integration in a load control system can be easily realized. The device features a manual operation and displaying of the switching state of the outputs. The 16/20 A, 16 A-AC3 (C-load) device is especially suited for loads with high surge currents e.g. LED or fluorescent lighting (AX) acc. EN 60669. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	2	SA/S 2.16.6.2	2CDG110269R0011		0.24	1
4-fold	4	SA/S 4.16.6.2	2CDG110270R0011		0.37	1
8-fold	8	SA/S 8.16.6.2	2CDG110271R0011		0.66	1
12-fold	12	SA/S 12.16.6.2	2CDG110272R0011		0.96	1

ABB i-bus® KNX

Outputs



SA/U 1.16.2

Switch Actuator, 1-fold, 16 A, FM

For switching 230 V~ consumers. Equipped with three extension inputs which depending on parameterization can act directly on the switching output or alternatively as binary inputs on the KNX bus. One Normally open contact, potential free. Rated voltage: 230 V~, +10 %/–10 %, 50 Hz. Max. switching current: 16 A; switching capacity: up to 2.500 W depending on the consumer. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SA/U 1.16.2	2CKA006151A0280		0.11	1



SAH/U 2.16.2

Switch/Shutter Actuator, 2/1-fold, FM

For controlling blind or awning motors or for switching two 230 V~ consumers. With 3 inputs and 1 change-over output – normally open contact, potential-bound –. Rated voltage: 230 V~, +10 %/–10 %, 50 Hz. Input polling voltage: 5 V. Output switching current per device: Σ 16 A, switching capacity: up to 2.500 W depending on the consumer. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SAH/U 2.16.2	2CKA006152A0042		0.11	1



IO/S 4.6.1.1

I/O Actuator, 6 A, MDRC

For the control of loads in residential areas, typically in hotel rooms and apartments. The I/O Actuators provide binary inputs for the connection of conventional push-buttons and outputs for switching loads. Inputs and outputs can be internally connected by ETS. By integrating the devices into KNX networks further functions can be realised: e.g. central control or room based emergency calls to a control centre.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	4	IO/S 4.6.1.1	2CDG110168R0011		0.17	1
8-fold	8	IO/S 8.6.1.1	2CDG110169R0011		0.30	1

ABB i-bus® KNX

Outputs



AA/S 4.1.2



AA/A 2.1.2

Analogue Actuator

The Analogue Actuator converts KNX telegrams in voltage (0...10 V) or current (0(4)...20 mA) signals. These analogue output signals are used to influence regulatory processes. For example, devices for heating, air conditioning or ventilation applications can be adjusted in their operation depending on the information, which are transmitted via the bus system. This Analogue Actuator is available in a 4-fold DIN rail version and a 2-fold device with surface mounting housing. The AA/A only provides an analog voltage signal and requires the KNX as only supply voltage. The ABB i-bus® Tool is supported for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
4-fold, MDRC	4	AA/S 4.1.2	2CDG110202R0011	€	kg	pc.
2-fold, SM	–	AA/A 2.1.2	2CDG110203R0011			

ABB i-bus® KNX

Shading Control



Modern building installation enables a high degree of functionality and simultaneously complies with increased security requirements.

Modern sun protection devices have a significant role in building automation:

- Anti-glare protection (e.g. PC workstations)
- Utilization of daylight by tracking the sun's position and directing available daylight
- Protecting furniture and carpets from fading
- Regulating the room temperature (overheating protection in summer; harvesting the available energy on cold days)
- Providing protection from people looking in from the outside
- Protection against intruders.

With the Blind/Roller Shutter Actuators (JRA/S), the complex requirements on a sustainable and energy efficient automatic sun protection control can be implemented in offices, residential and functional buildings via ABB i-bus® KNX.

The Blind/Roller Shutter Actuators are ideal for the control of drives in the area of sun protection:

- Blinds, exterior blinds, slat blinds and panel curtains

- Roller shutters, roller blinds, screens, vertical blinds
- Awnings, pleated blinds, pleated curtains, etc.

Optimum room air quality via automatic ventilation

The demands for the reduction of energy consumption often results in poor ventilation in today's heavily insulated buildings. The quality of the room air does not comply with the desired and required level.

Natural ventilation is often an effective and efficient method for exchanging the "used" room air and improving the air quality in the room. If the air quality in the room is monitored with sensors (temperature, humidity, CO₂ concentration), the ventilation flaps can be opened automatically and in good time ensuring that the air quality is kept in a comfortable range.

Blind/Roller Shutter Actuators are ideal for control of ventilation elements such as

- Ventilation flaps
- Roof hatches, skylights
- Windows, doors and gates

Automatic travel detection

Travel times for the connected drives can be easily determined during operation with the automatic travel detec-

tion feature. It saves time during setup. Furthermore, compensation of age and weather-related length changes to blinds or roller shutters is assured. It facilitates precise positioning of the blinds/shutter when using sun position-dependent control.

Template functionality

This function allows parameter settings of an output to be copied or exchanged with other freely selectable outputs. Templates are useful particularly on projects, where all drives of a facade are controlled identically. It shortens the setup process and reduces the possible sources of error with parameterization.

Integration in the room temperature control

The intelligent and networked blind and roller shutter control plays an important role in the energy efficient usage of a building. The level of sunlight in the room and heating up due to the sun's energy can be controlled in conjunction with the room climate control. The software function "overheat control" prevents unintentional overheating of a room. The blinds are closed in good time. The shutter control can be actively involved in the room temperature control.

ABB i-bus® KNX

Shading Control

	Standard						SMI	
	JRA/S x.230.2.2	JRA/S x.230.5.2	JRA/S x.230.4.2	JRA/S 4.230.7.2	JRA/S x.24.2.2	JRA/S 4.24.5.2	SJR/S 4.24.2.1	JA/S 4.SMI.1M
General								
Supply voltage	KNX	KNX	KNX	KNX	KNX	KNX	KNX	KNX
Nominal voltage	230 V AC	230 V AC	230 V AC	230 V AC	24 V DC	24 V DC	24 V DC	230 V AC
Auxiliary voltage	–	–	–	–	–	–	230 V AC	230 V AC
Type of installation	MDRC	MDRC	MDRC	MDRC	MDRC	MDRC	MDRC	MDRC
Number of Outputs	2, 4, 8, 12	2, 4, 8, 12	4, 8	4	2, 4, 8	4	4x 4 SMI LoVo (broadcast)	4x 4 SMI (broadcast)
Nominal current relays	6 A	6 A	6 A	6 A	6 A	6 A	–	–
Relays type	bistable	bistable	bistable	bistable	bistable	bistable	–	–
Nominal power motor	1.380 W	1.380 W	1.380 W	1.380 W	144 W	144 W	–	–
Number of Inputs (Contact Scanning)	–	–	8, 16	8	–	–	–	–
Module width (space unit)	4, 4, 8, 12	4, 4, 8, 12	6, 12	8	4, 4, 8	4	4	4
Manual Operation	■	■	–	■	■	■	■	■
Functions (Device)								
Motor control								
Blinds	■	■	■	■	■	■	■	■
Shutters	■	■	■	■	■	■	■	■
Ventilation flap	■	■	■	■	■	■	–	–
Travel detection	–	■	■	■	–	■	–	–
Delay on turn of direction	■	■	■	■	■	■	–	–
Run time delay & minimum run time	■	■	■	■	■	■	■	■
Swap direction of rotation	■	■	■	■	■	■	–	–
Dead times	■	■	■	■	■	■	–	–
Reference movement	■	■	■	■	■	■	–	–
Calibration movement	–	■	■	■	–	■	–	–
Support of motors with two lower end positions	–	–	–	■	–	–	–	–
Safety								
Weather alarms & central securities	■	■	■	■	■	■	■	■
Forced operation	■	■	■	■	■	■	■	■
Individual securities	■	■	■	■	■	■	–	–
Automatic sun protection								
Block direct or automatic commands	■	■	■	■	■	■	■	■
Glare protection	■	■	■	■	■	■	■	■
Heating/Cooling	■	■	■	■	■	■	■	■
Overheat protection	■	■	■	■	■	■	–	–
Call up & save KNX scenes	■	■	■	■	■	■	■	■
SMI	–	–	–	–	–	–	■	■
Special functions								
KNX Data Secure	■	■	■	■	■	■	–	–
Sector control	■	■	■	■	■	■	–	–
Working position	■	■	■	■	■	■	–	–
Logic & Threshold	■	■	■	■	■	■	–	–
Transmission and switching delay	■	■	■	■	■	■	–	–
Reaction after KNX voltage failure/recovery	■	■	■	■	■	■	■	■
Status messages	■	■	■	■	■	■	■	■
i-bus®-Tool	■	■	■	■	■	■	–	–

■ = Function is supported

– = Function is not supported

> Table of contents



JRA/S 2.230.2.2

Blind/Shutter Actuator, 230 V AC, manual operation, MDRC

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. To protect the motor, the output contacts are electromechanically locked against each other. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	JRA/S 2.230.2.2	2CDG110284R0011		0.16	1
4-fold	4	JRA/S 4.230.2.2	2CDG110285R0011		0.20	1
8-fold	8	JRA/S 8.230.2.2	2CDG110286R0011		0.38	1
12-fold	12	JRA/S 12.230.2.2	2CDG110287R0011		0.54	1



JRA/S 8.230.5.2

Blind/Shutter Actuator with travel detection, 230 V AC, manual operation, MDRC

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The travel times of the motor are detected automatically via current detection. To protect the motor, the output contacts are electromechanically locked against each other. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	JRA/S 2.230.5.2	2CDG110288R0011		0.17	1
4-fold	4	JRA/S 4.230.5.2	2CDG110289R0011		0.22	1
8-fold	8	JRA/S 8.230.5.2	2CDG110290R0011		0.40	1
12-fold	12	JRA/S 12.230.5.2	2CDG110291R0011		0.59	1



JRA/S 4.230.4.2

Blind/Shutter Actuator with travel detection and binary inputs, 230 V AC, MDRC **NEW**

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The travel times of the motor are detected automatically via current detection. Additionally the device has 2 binary inputs (contact scanning) per output, for the connection of conventional switches or push buttons to directly control the hanging. The device is pre-configured so that the respective inputs are directly assigned to the outputs. To protect the motor, the output contacts are electromechanically locked against each other. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	6	JRA/S 4.230.4.2	2CDG110292R0011		0.28	1
8-fold	12	JRA/S 8.230.4.2	2CDG110293R0011		0.38	1

ABB i-bus® KNX

Shading Control



JRA/S 4.230.7.2

Blind/Shutter Actuator with 3 limit switch, travel detection and binary inputs, 4-fold, 230 V AC, manual operation, MDRC

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The device can be used for blinds with working position/3-end-position-switches and features an additional down contact to control the respective motors. The travel times of the motor are detected automatically via current detection. Additionally the device has 2 binary inputs (contact scanning) per output, for the connection of conventional switches or push buttons to directly control the hanging. The device is pre-configured so that the respective inputs are directly assigned to the outputs. To protect the motor, the output contacts are electromechanically locked against each other. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The device supports KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	8	JRA/S 4.230.7.2	2CDG110294R0011		0.53	1



JRA/S 2.24.2.2

Blind/Shutter Actuator, 24 V DC, manual operation, MDRC

For the control of independent 24 V DC motors via ABB i-bus® KNX. The device is designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	JRA/S 2.24.2.2	2CDG110295R0011		0.15	1
4-fold	4	JRA/S 4.24.2.2	2CDG110296R0011		0.21	1
8-fold	8	JRA/S 8.24.2.2	2CDG110297R0011		0.38	1



JRA/S 4.24.5.2

Blind/Shutter Actuator with travel detection, 4-fold, 24 V DC, manual operation, MDRC

For the control of up to 4 independent 24 V DC motors via ABB i-bus® KNX. The device is designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The travel times of the motor are detected automatically via current detection. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The device supports KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	4	JRA/S 4.24.5.2	2CDG110298R0011		0.21	1



JA/S 4.SMI.1M

SMI Shutter Actuator, 4-fold, Manual Operation, MDRC

It controls four independent groups (broadcast) with up to four SMI (Standard Motor Interface) drives (230 V) for positioning blinds, roller shutters, awnings and other shading products. Status signals (motor fault, direction of movement) can also be sent from the SMI drive on the bus. Push buttons are located at the front of the device to control the outputs e.g. during commissioning. The current status of the output is displayed via LEDs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	JA/S 4.SMI.1M	2CDG110028R0011		0.25	1



SJR/S 4.24.2.1

SMI Blind/Roller Shutter Actuator, LoVo, 4-fold, MDRC

It controls four independent groups (broadcast) with up to four SMI (Standard Motor Interface) LoVo drives for positioning blinds, roller shutters, awnings and other shading products. Status signals (motor fault, direction of movement) can also be sent from the SMI drive on the bus. Push buttons are located at the front of the device to control the outputs e.g. during commissioning. The current status of the output is displayed via LEDs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SJR/S 4.24.2.1	2CDG110143R0011		0.25	1



JSB/S 1.1

Shutter Control Unit, MDRC

Controls shutter and blind actuators according to the position of the sun. The shutter control unit contains the functions of anti-glare protection and daylight redirection for up to 4 facades. Automatic shading can be implemented for every building and climatic control can be supported by the comprehensive range of parameter settings in the ETS.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	JSB/S 1.1	GHQ6310084R0111		0.12	1

Lighting Control

ABB i-bus® KNX DALI Gateways

Impressive lighting atmosphere, thanks to the DALI Gateways DG/S 1.64.5.1 and DG/S 2.64.5.1



A DALI Gateway serves as the interface between the KNX installation in the building and the digital DALI lighting control system, and therefore unites the two most important building automation standards.

ABBs DALI Gateway Premium devices enable maximum functionality and flexibility in lighting design thanks to the tunable white and color control function.

ABB i-bus® KNX

Lighting Control – DALI

The ABB DALI Gateways are used to interface between DALI (Digital Addressable Lighting Interface) and KNX installations. Four Gateways are available:


The basic versions DG/S 1.64.1.1 DALI Gateway (1-fold) and DG/S 2.64.1.1 DALI Gateway (2-fold) and on the other hand the premium versions DG/S 1.64.5.1 DALI Gateway (1-fold) and DG/S 2.64.5.1 DALI Gateway (2-fold). All incorporate the DALI power supply.

DALI Gateways DG/S 1.64.x.1

Flexibility by controlling light individually per device or in groups



The DG/S 1.64.1.1 DALI Gateway Basic (1-fold) or DG/S 1.64.5.1 DALI Gateway Premium (1-fold) can install up to 64 DALI devices both via 16 flexible DALI (orange lined group) and KNX lighting groups (green dotted lined group), each with one or more DALI participants. Control and Monitoring via KNX. Control and status feedback can also be carried out via Broadcast. 16 independent Lighting scenes are available.

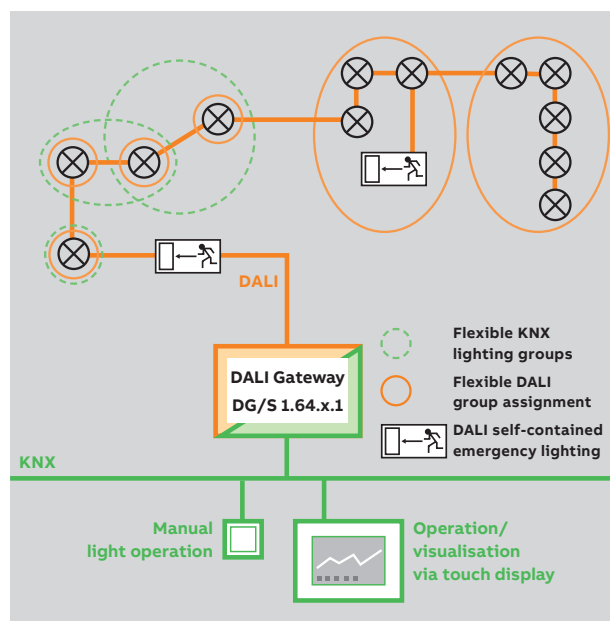

Both, basic and premium Gateways are certificated as Single-Master DALI-2 controller and supports DT1 self-contained emergency lighting acc. EN 62386-202. The DALI Gateways Premium supports DT8 color control acc. EN 62386-209. Other DALI data points like DT6 can be controlled via standard DALI commands acc. EN 62386-102.

DALI Gateways DG/S 2.64.x.1

Maximum flexibility combined with highest amount of DALI participants and groups, to meet all customer needs



The DG/S 2.64.1.1 DALI Gateway Basic (2-fold) or DG/S 2.64.5.1 DALI Gateway Premium (2-fold) can install up to 2 x 64 DALI devices both via 2 x 16 flexible DALI (orange lined group) and KNX lighting groups (green dotted lined group), each with one or more DALI participants. Control and Monitoring via KNX. Control and status feedback can also be carried out via Broadcast. 2 x 16 independent Lighting scenes are available.

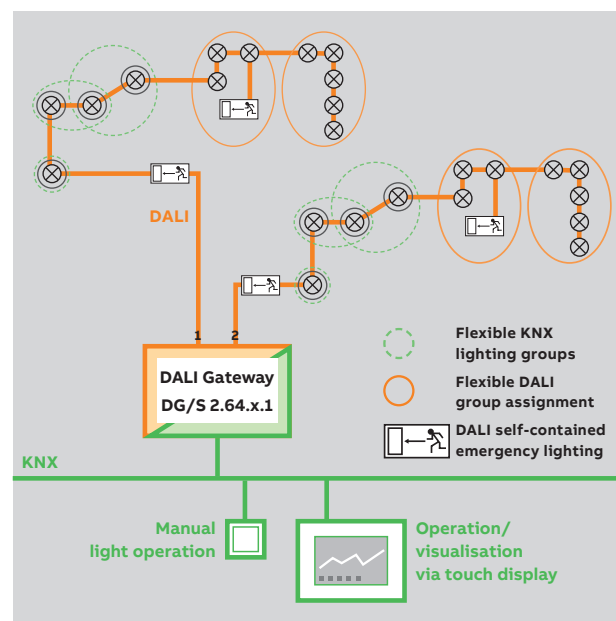


ABB i-bus® KNX


Lighting Control – DALI

DALI Light Controller DLR/S 8.16.1M

Energy through constant lighting control



Control via 16 lighting groups. Up to 8 lighting groups can be controlled with 8 Light Sensors. Master-slave, staircase light and Scene mode round off the functions.

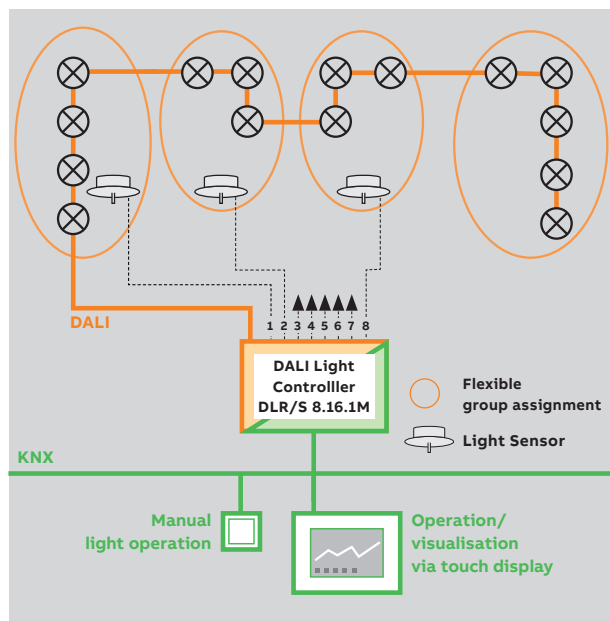

DALI Light Controller DLR/A 4.8.1.1

Decentralized Constant Lighting Control



The DALI Light Controller DLR/A 4.8.1.1 is a surface mounting device for switching and dimming of 8 independent lighting groups. A maximum of 64 DALI devices can be connected. The device can be used for 4-fold constant lighting control in connection with 4 Light Sensors LF/U 2.1. Furthermore staircase lighting and master/slave functions are provided. Fault feedback messages, e.g. concerning ballast or lamp failures, can be programmed and activated via KNX. The compact surface-mounted housing allows the decentralized installation in the underfloor or in false ceilings – optimal for the use with Room Controller RC/A.

DALI Gateway DG/S 8.1

The proven technology



Lighting groups are formed via “rigid” hardware wiring.
Fast commissioning as no addressing is necessary.
No readdressing when a ballast is exchanged. 8 x 16 DALI devices.

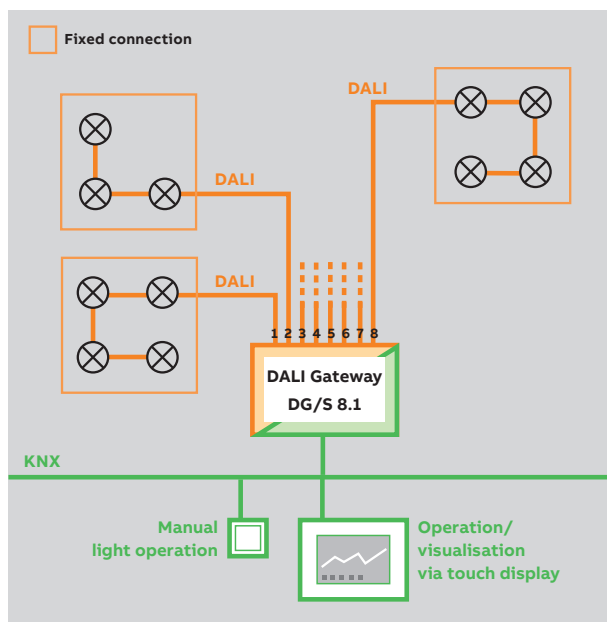


ABB i-bus® KNX

Lighting Control – DALI

General	Gateways		
	DG/S 1.64.1.1	DG/S 2.64.1.1	DG/S 8.1
Supply voltage	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Module width (space unit)	4	4	6
Number of outputs	1	2	8
Light Sensor inputs	–	–	–
Degree of protection	IP20	IP20	IP20
Integrated power supply	■	■	■
Number of DALI participants	64	2 x 64	8 x 16
Broadcast control	■	■	■
Number of group control	16	2 x 16	–
Individual control	64	2 x 64	–
DT1 Self-contained emergency lighting, IEC 62 386-202	■	■	–
DT8 lighting (Tunable White, Tc, RGB(W)), IEC 62 386-209	–	–	–
DTx standard DALI function (set, dim, scene...), IEC 62 386-102	■	■	■
Manual operation	■	■	■
DALI approval	DALI-2 certified	DALI-2 certified	trademarked
Supports long-frames	■	■	–
DALI firmware update via KNX	■	■	–
Functions			
Enable/disable DALI address assignment	■	■	–
Switching, dimming, set brightness	■	■	■
Human Centric Lighting (HCL)	–	–	–
Dim2Warm	–	–	–
RGB(W)*	–	–	–
HSV(W)* - Hue, Saturation and Value*	–	–	–
Load control*	–	–	–
Sequencer*	–	–	–
Individual set/dimming colour temperature per group/ballast	–	–	–
Tunable White Presets	–	–	–
Operating hours	–	–	–
Standby shutdown	–	–	–
Slave	■	■	■
Staircase lighting	■	■	■
Burn-in	■	■	■
Scenes, 8 bit call	■	■	■
Scenes, 1 bit call	–	–	■
Forced	■	■	–
Emergency lighting test	■	■	–
Partial failure	■	■	–
Constant light control	–	–	–
Reaction on KNX bus voltage failure	■	■	■
Reaction on KNX voltage recovery	■	■	■
Reaction on DALI bus voltage failure	■	■	■
Reaction on DALI voltage recovery	■	■	■
Power on level	■	■	–
Device or lamp fault	■	■	■
Cyclic monitoring telegram	■	■	■
DALI telegram rate modifiable	■	■	–
Commissioning and diagnostic functions (ABB i-bus® Tool)			
Device assignment	■	■	–
Group assignment	■	■	–
Fault DALI device	■	■	–
Fault lamp	■	■	–
Function test (ON/OFF/brightness value)	■	■	–
Commissioning constant light control	–	–	–
Test emergency lighting	■	■	–
Broadcast on/off	–	–	–
Shows if there are unaddressed DALI participants	–	–	–

■ = Function is supported

– = Function is not supported

* = From ETS application version 2.0

> Table of contents

	Gateways		Light Control	
	DG/S 1.64.5.1	DG/S 2.64.5.1	DLR/S 8.16.1M	DLR/A 4.8.1.1
General				
Supply voltage	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	SM
Module width (space unit)	4	4	6	220 x 147 x 50 mm
Number of outputs	1	2	1	1
Light Sensor inputs	–	–	8	4
Degree of protection	IP20	IP20	IP20	IP54
Integrated power supply	■	■	■	■
Number of DALI participants	64	2 x 64	64	64
Broadcast control	■	■	■	■
Number of group control	16	2 x 16	16	8
Individual control	64	2 x 64	–	–
DT1 Self-contained emergency lighting, IEC 62 386-202	■	■	–	–
DT8 lighting (Tunable White, Tc, RGB(W)), IEC 62 386-209	■	■	–	–
DTx standard DALI function (set, dim, scene...), IEC 62 386-102	■	■	■	■
Manual operation	■	■	■	■
DALI approval	DALI-2 certified	DALI-2 certified	trademarked	trademarked
Supports long-frames	■	■	–	–
DALI firmware update via KNX	■	■	–	–
Functions				
Enable/disable DALI address assignment	■	■	■	■
Switching, dimming, set brightness	■	■	■	■
Human Centric Lighting (HCL)	■	■	–	–
Dim2Warm	■	■	–	–
RGB(W)*	■	■	–	–
HSV(W)* - Hue, Saturation and Value*	■	■	–	–
Load control*	■	■	–	–
Sequencer*	■	■	–	–
Individual set/dimming colour temperature per group/ballast	■	■	–	–
Tunable White Presets	■	■	–	–
Operating hours	■	■	–	–
Standby shutdown	■	■	–	–
Slave	■	■	■	■
Staircase lighting	■	■	■	■
Burn-in	■	■	■	■
Scenes, 8 bit call	■	■	■	■
Scenes, 1 bit call	■	■	■	■
Forced	■	■	■	■
Emergency lighting test	■	■	–	–
Partial failure	■	■	–	–
Constant light control	–	–	■	■
Reaction on KNX bus voltage failure	■	■	■	■
Reaction on KNX voltage recovery	■	■	■	■
Reaction on DALI bus voltage failure	■	■	■	■
Reaction on DALI voltage recovery	■	■	■	■
Power on level	■	■	■	■
Device or lamp fault	■	■	■	■
Cyclic monitoring telegram	■	■	■	■
DALI telegram rate modifiable	■	■	–	–
Commissioning and diagnostic functions				
(ABB i-bus® Tool)				
Device assignment	■	■	■	■
Group assignment	■	■	■	■
Fault DALI device	■	■	■	■
Fault lamp	■	■	■	■
Function test (ON/OFF/brightness value)	■	■	■	■
Commissioning constant light control	–	–	■	■
Test emergency lighting	■	■	–	–
Broadcast on/off	■	■	–	–
Shows if there are unaddressed DALI participants	■	■	–	–

■ = Function is supported

– = Function is not supported

* = From ETS application version 2.0

ABB i-bus® KNX

Lighting Control – DALI



DG/S 1.64.1.1

DALI Gateway, Basic, MDRC

Single-Master DALI Controller certificated acc. to DALI-2 (EN 62386). The device is used to control DALI or DALI-2 standard devices via ABB i-bus® KNX. One/Two DALI output(s) for up to 64/2x64 DALI participants. The DALI power supply is integrated. Control and status feedback is carried out via KNX per DALI participants (64/2 x 64), with lighting groups (16/2 x 16), together in broadcast or per scenes (16/2 x 16). Extensive fault and error messages are available. Slave-, staircase-, force-, block- and scene-function are integrated. Self-contained emergency converter, DT1 acc. EN 62386-202 will be supported. By means of KNX and emergency converter, different emergency tests (e.g., function and duration test) can be triggered. Other DALI devices e.g., DT6 can be controlled via standard DALI commands acc. to EN 62386-102.

For diagnostic use and individual change of the DALI address or group assignment a separate software tool (ABB i-bus® Tool) is available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold	4	DG/S 1.64.1.1	2CDG110198R0011		0.18	1
2-fold	4	DG/S 2.64.1.1	2CDG110199R0011		0.19	1



DG/S 1.64.5.1

DALI Gateway, Premium, MDRC

Single-Master DALI Controller certificated acc. to DALI-2 (EN 62386). The device is used to control DALI or DALI-2 devices via ABB i-bus® KNX. One/Two DALI output(s) for up to 64/2 x 64 DALI participants. DALI power supply is integrated. Control and status feedback is carried out via KNX per DALI participants (64/2 x 64), with lighting groups (16/2 x 16), together in broadcast or per scenes (16/2 x 16). DALI devices type DT1 (Self-contained emergency converter acc. EN 62386-202) and type DT8 (colour temperature Tc & RGB(W) acc. EN 62386-209) will be supported. Other DALI devices e.g., DT6 can be controlled via standard DALI commands acc. to EN 62386-102.

Extensive fault and error messages are available. Slave-, staircase-, force-, block- and scene-function are integrated. Colour can set and dim, HSV(W)-, Dim2Warm-, HCL-function, 4 sequencer per DALI output can be used. A standby switch-off in combination with a KNX switch actuator (e.g., SA/S) and the integration of the DALI Gateways into a load control system are possible. By means of KNX and DT1 converter different emergency tests (e.g., function and duration test) can be triggered, test results are transferred back to KNX. For diagnostic use and individual change of the DALI address or group assignment a separate software tool (ABB i-bus® Tool) is available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
1-fold	4	DG/S 1.64.5.1	2CDG110273R0011		0.18	1
2-fold	4	DG/S 2.64.5.1	2CDG110274R0011		0.19	1



DG/S 8.1

DALI Gateway, 8-fold, MDRC

Single-Master DALI Controller DALI (EN 62386) trademarked. For controlling up to 128 standard DALI devices (DT0) acc. DALI or DALI-2. There are 8 separate, independent DALI outputs/channels available. Up to 16 DALI devices can be connected per channel. The DALI power supply is integrated in the gateway. The functions of switching, dimming, set values and fault indication for lamps and electronic ballasts are available for each output. It is possible to set the lamp burn-in time and 16 light scenes. Commissioning is simplified as no addressing or commissioning of the DALI devices is necessary.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	DG/S 8.1	2CDG110025R0011		0.31	1



DLR/S 8.16.1M

DALI Light Controller, 8-fold, Manual Operation, MDRC

Single-Master DALI Controller DALI (EN 62386) trademarked. For switching and dimming of 16 independent lighting groups. A maximum of 64 standard DALI devices (DT0) acc. DALI or DALI-2 can be connected. The device can be used for 8-fold constant lighting control in connection with eight Light Sensors LF/U 2.1. Fault feedback messages can be programmed and activated via KNX. With comfortable manual operation and status display.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	DLR/S 8.16.1M	2CDG110101R0011		0.26	1



DLR/A 4.8.1.1

DALI Light Controller, 4-fold, SM

Single-Master DALI Controller DALI (EN 62386) trademarked. Surface mounting device for switching and dimming of 8 independent groups of luminaries. Up to 64 standard DALI participants (DT0) acc. DALI or DALI-2 can be connected to one DALI control line. When combined with the Light Sensor LF/U 2.1 the device can be used as a 4-fold light controller for constant light control. Additionally a staircase and master/slave function is integrated. A great number of status feedback e.g. lamp and ballast fault can be transferred from DALI to KNX. With this functions the DALI light controller is a key factor in every energy efficient building automation. With his surface mounting housing it is possible to insert the device central in false ceiling or underfloor installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	DLR/A 4.8.1.1	2CDG110172R0011		0.66	1

ABB i-bus® KNX

Lighting Control – DALI

Universal Dim Actuators		
	UD/S x.210.2.1	UD/S x.315.2.1
General		
Supply voltage	110 – 230 V AC ± 10 %, 50/60 Hz	110 – 230 V AC ± 10 %, 50/60 Hz
Type of installation	DIN-Rail	DIN-Rail
Module width (space unit)	6/8	4/8/12
Number of outputs	4/6	2/4/6
Maximum load per channel	4 x 210 W (1 x 600 W)/ 6 x 210 W (1 x 800 W)	2 x 315 W (1 x 500 W) 4 x 315 W (2 x 500 W) 6 x 315 W (2 x 700 W or 3 x 500 W)
Incoming supply	4/6 phase inputs	2/4/6 phase inputs
Load types		
230 V incandescent lamps	■	■
230 V halogen lamps	■	■
Low-voltage halogen lamps with conventional transformers or electronic transformers	■	■
LED strips or 12/24 V lamps	–	–
LED Retrofit 230 V	■	■
Grouping of channels for load increase	■	■
Switching		
Brightness value when turned on	■	■
Dimming speed for switching on and off	■	■
Dimming		
Min. and max. dimming values	■	■
Switching on/off via rel. dimming	■	■
Further functions		
Forced operation	■	■
Dimming curve adjustment	■	■
Reaction on bus voltage failure	■	■
Behavior on bus voltage recovery	■	■
Status feedback	■	■
Blocking channel	■	■
Scenes	■	■
Phase angle control: automatic, leading or trailing edge	■	■
Additional logic functions	■	■
Staircase lighting	■	■

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

Lighting Control

	Switch/Dim Actuators			Constant Light Control	
	SD/S 2.16.1	SD/S 4.16.1	SD/S 8.16.1	LR/S 2.16.1	LR/S 4.16.1
General					
Supply voltage	KNX	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (space unit)	4	6	8	4	6
Number of outputs 1-10 V (passive)	2	4	8	2	4
Manual operation	■	■	■	■	■
Maximum current per control output	100 mA	100 mA	100 mA	100 mA	100 mA
Maximum cable length at maximum load (100 mA)	70 m (cable cross-section 0.8 mm ²) 100 m (cable cross-section 1.5 mm ²)	70 m (cable cross-section 0.8 mm ²) 100 m (cable cross-section 1.5 mm ²)	70 m (cable cross-section 0.8 mm ²) 100 m (cable cross-section 1.5 mm ²)	70 m (cable cross-section 0.8 mm ²) 100 m (cable cross-section 1.5 mm ²)	70 m (cable cross-section 0.8 mm ²) 100 m (cable cross-section 1.5 mm ²)
Light Sensor (LF/U 2.1)	–	–	–	2	4
Maximum cable length per sensor (P-YCYM or J-Y(ST)Y cable (SELV), diameter 0.8 mm)	–	–	–	100 m	100 m
Power loss per device at max. load	2.6 W	5.2 W	10.4 W	2.6 W	5.2 W
Switching capacity					
Rated current I _n	16 A AC1	16 A AC1	16 A AC1	16 A AC1	16 A AC1
Rated voltage U _n	250/440 V AC	250/440 V AC	250/440 V AC	250/440 V AC	250/440 V AC
AC1 operation (cos φ = 0.8) DIN EN 60 947-4-1	16 A	16 A	16 A	16 A	16 A
AC3 operation (cos φ = 0.45) DIN EN 60 947-4-1	8 A/230 V	8 A/230 V	8 A/230 V	8 A/230 V	8 A/230 V
Fluorescent lighting load AX DIN EN 60 669-1	10 A (140 μF) ¹⁾	10 A (140 μF) ¹⁾	10 A (140 μF) ¹⁾	10 A (140 μF) ¹⁾	10 A (140 μF) ¹⁾
Minimum switching capacity	100 mA/12 V	100 mA/12 V	100 mA/12 V	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	10 A/24 V DC	10 A/24 V DC	10 A/24 V DC	10 A/24 V DC	10 A/24 V DC
Mechanical service life	> 3 x 10 ⁶	> 3 x 10 ⁶	> 3 x 10 ⁶	> 3 x 10 ⁶	> 3 x 10 ⁶
Electronic endurance to DIN IEC 60 947-4-1					
Rated current AC1 (240 V/cos φ = 0.8)	100,000	100,000	100,000	100,000	100,000
Rated current AC3 (240 V/cos φ = 0.45)	30,000	30,000	30,000	30,000	30,000
Rated current AC5a (240 V/cos φ = 0.45)	30,000	30,000	30,000	30,000	30,000
Incandescent lamp load at 230 V AC	2,300 W	2,300 W	2,300 W	2,300 W	2,300 W
Fluorescent lamps T5/T8					
Uncorrected	2,300 W	2,300 W	2,300 W	2,300 W	2,300 W
Parallel compensated	1,500 W	1,500 W	1,500 W	1,500 W	1,500 W
DUO circuit	1,500 W	1,500 W	1,500 W	1,500 W	1,500 W
Low-voltage halogen lamps					
Inductive transformer	1,200 W	1,200 W	1,200 W	1,200 W	1,200 W
Electronic transformer	1,500 W	1,500 W	1,500 W	1,500 W	1,500 W
Halogen lamp 230 V	2,500 W	2,500 W	2,500 W	2,500 W	2,500 W
Dulux lamps					
Uncorrected	1,100 W	1,100 W	1,100 W	1,100 W	1,100 W
Parallel compensated	1,100 W	1,100 W	1,100 W	1,100 W	1,100 W
Mercury-vapour lamps					
Inductive transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W
Electronic transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W

■ = Function is supported

– = Function is not supported

1) = The maximum peak inrush current may not be exceeded

ABB i-bus® KNX

Lighting Control

	Switch/Dim Actuators			Constant Light Control	
	SD/S 2.16.1	SD/S 4.16.1	SD/S 8.16.1	LR/S 2.16.1	LR/S 4.16.1
Sodium-vapour lamps					
Inductive transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W
Electronic transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W
Max. peak inrush-current I_p (150 μ s)	400 A	400 A	400 A	400 A	400 A
Max. peak inrush-current I_p (250 μ s)	320 A	320 A	320 A	320 A	320 A
Max. peak inrush-current I_p (600 μ s)	200 A	200 A	200 A	200 A	200 A
Number of ballasts (T5/T8, single element) e.g.¹⁾					
18 W (ABB EVG 1 x 18 SF)	23	23	23	23	23
24 W (ABB EVG 1 x 24 CY)	23	23	23	23	23
36 W (ABB EVG 1 x 36 CF)	14	14	14	14	14
58 W (ABB EVG 1 x 58 CF)	11	11	11	11	11
80 W (Helvar EL 1 x 80 SC)	10	10	10	10	10

	Switch/Dim Actuators			Constant Light Control	
	SD/S 2.16.1	SD/S 4.16.1	SD/S 8.16.1	LR/S 2.16.1	LR/S 4.16.1
Functions					
Brightness control	–	–	–	■	■
Brightness value	■	■	■	■	■
Dimming speed for transition brightness values	■	■	■	■	■
Min. and max. value limits	■	■	■	■	■
Set switching on and off via value	■	■	■	■	■
Presets	■	■	■	■	■
Scenes	■	■	■	■	■
Switch					
Brightness value when turned on	■	■	■	■	■
Dimming speed for switching on and off	■	■	■	■	■
Dimming					
Dimming speed can be changed via KNX	■	■	■	■	■
Min. and max. dimming values	■	■	■	■	■
Switching on/off via rel. dimming	■	■	■	■	■
Forced operation					
2-bit coded forced operation	■	■	■	■	■
Behaviour after voltage recovery	■	■	■	■	■
Block Activate output via 1-bit object	■	■	■	■	■
Special					
4-point characteristic adjustment	■	■	■	■	■
Preference with bus voltage failure	■	■	■	■	■
Status feedback	■	■	■	■	■
Additional					
Slave mode e.g. for integration in the constant lighting control	■	■	■	■	■
Staircase lighting	■	■	■	■	■
Prewarning via dimming and/or KNX object	■	■	■	■	■
Commissioning and diagnostic functions					
Control and diagnosis via ABB i-bus® Tool	–	–	–	■	■

■ = Function is supported

– = Function is not supported

1) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush current of the electronic ballasts



LR/S 4.16.1

Light Controller, 1-10 V, MDRC

The device enables the switching and dimming of 2 or 4 independent lighting circuits in conjunction with electronic ballasts. In combination with the Light Sensor LF/U 2.1, the device can be used for constant lighting control. 2 or 4 Light Sensors can be connected to the controller for precise detection of the lighting conditions.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	LR/S 2.16.1	2CDG110087R0011		0.25	1
4-fold	6	LR/S 4.16.1	2CDG110088R0011		0.40	1



LF/U 2.1

Light Sensor, FM

Used for implementing constant lighting control applications in conjunction with light controllers LR/S, LR/M, DLR/S 8.16.1M or DLR/A 4.8.1.1. The scope of delivery includes different optical rods, the connection terminals and the cover for discrete fitting in a room.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LF/U 2.1	2CDG110089R0011		0.07	1



SD/S 8.16.1

Switch/Dim Actuator, 16 A, MDRC

Used for switching and dimming of 2, 4 or 8 independent groups of luminaries with electronic ballasts with 1 – 10 V control interfaces. On each channel the power supply of the ballasts is switched by a floating load relay (16 A – AC1). Every output can be operated manually and features display of the switching state. The device can assume a range of applications thanks to the programming options.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	SD/S 2.16.1	2CDG110079R0011		0.21	1
4-fold	6	SD/S 4.16.1	2CDG110080R0011		0.32	1
8-fold	8	SD/S 8.16.1	2CDG110081R0011		0.56	1

ABB i-bus® KNX

Lighting Control



UD/S 4.210.2.1

LED Dimmer, 4-fold, 210 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.

Rated power at 230 V ~:

- 230 V ~ incandescent and halogen lamps: 4 x 210 W/VA to 1 x 600 W/VA.
- Dimmable 230 V ~ LEDi: 4 x 210 W/VA to 1 x 600 W/VA in trailing edge mode, 4 x 80 W/VA to 1 x 200 W/VA in leading edge mode.
- Inductive L-transformers with LED/low-voltage halogen lamps: 4 x 210 W/VA to 1 x 600 W/VA.
- Electronic C-transformers with LED/low voltage halogen lamps: 4 x 210 W/VA to 1 x 600 W/VA.
- Electronic LC transformers with LED/low-voltage halogen lamps: 4 x 80 W/VA to 1 x 200 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	6	UD/S 4.210.2.1	2CKA006197A0047		0.28	1



UD/S 6.210.2.1

LED Dimmer, 6-fold, 210 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.

Rated power at 230 V ~:

- 230 V ~ incandescent and halogen lamps: 6 x 210 W/VA to 1 x 800 W/VA.
- Dimmable 230 V ~ LEDi: 6 x 210 W/VA to 1 x 800 W/VA in trailing edge mode, 6 x 80 W/VA to 1 x 240 W/VA in leading edge mode.
- Inductive L-transformers with LED/low-voltage halogen lamps: 6 x 210 W/VA to 1 x 800 W/VA.
- Electronic C-transformers with LED/low voltage halogen lamps: 6 x 210 W/VA to 1 x 800 W/VA.
- Electronic LC transformers with LED/low-voltage halogen lamps: 6 x 80 W/VA to 1 x 240 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
6-fold	8	UD/S 6.210.2.1	2CKA006197A0049		0.58	1



UD/S 2.315.2.1

LED Dimmer, 2-fold, 315 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel in groups as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.

Rated power at 230 V ~:

- 230 V ~ incandescent and halogen lamps: 2 x 315 W/VA to 1 x 500 W/VA.
 - Dimmable 230 V ~ LEDi: 2 x 315 W/VA to 1 x 500 W/VA in trailing edge mode,
 - 2 x 120 W/VA to 1 x 200 W/VA in leading edge mode.
 - Inductive L-transformers with LED/low-voltage halogen lamps: 2 x 315 W/VA to 1 x 500 W/VA.
 - Electronic C-transformers with LED/low voltage halogen lamps: 2 x 315 W/VA to 1 x 500 W/VA.
 - Electronic LC transformers with LED/low-voltage halogen lamps: 2 x 120 W/VA to 1 x 200 W/VA.
- Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	UD/S 2.315.2.1	2CKA006197A0053		0.29	1



UD/S 4.315.2.1

LED Dimmer, 4-fold, 315 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming retrofit LED lamps (LEDi). Also suitable for dimming incandescent lamps, low-voltage halogen lights with conventional or electronic transformers, 230 V halogen lamps and dimmable energy-saving halogen lamps. Automatic load detection (can be deactivated). Separate N-connection per channel. Parallel connection of the outputs possible to increase the output power. Outputs can be connected in parallel in groups. Minimum load: 2 W. Manual operation on device also possible without bus voltage or in an unprogrammed status. Programming of the device also possible without applied 230 V supply voltage. Extensive test and diagnosis functions for the i-bus® Tool. Fast parameter setting in ETS using copyable channel templates. With integrated bus coupler.

Nominal power at 230 V ~ mains voltage:

- 230 V ~ incandescent and halogen lamps: 4 x 315 W/VA to 2 x 500 W/VA in trailing edge control, 4 x 120 W/VA to 2 x 200 W/VA in leading edge control.
 - Dimmable 230 V ~ LEDi: 4 x 315 W/VA to 2 x 500 W/VA in trailing edge control, 4 x 120 W/VA to 2 x 200 W/VA in leading edge control.
 - Inductive L-transformers with LED/low-voltage halogen lamp: 4 x 315 W/VA to 2 x 500 W/VA.
 - Electronic C-transformers with LED/low-voltage halogen lamp: 4 x 315 W/VA to 2 x 500 W/VA.
 - Electronic LC-transformers with LED/low-voltage halogen lamp: 4 x 120 W/VA to 2 x 200 W/VA.
- Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	UD/S 4.315.2.1	2CKA006197A0057		0.56	1

ABB i-bus® KNX

Lighting Control



UD/S 6.315.2.1

LED Dimmer, 6-fold, 315 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel in groups as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.

Rated power at 230 V ~:

- 230 V ~ incandescent and halogen lamps: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA.
- Dimmable 230 V ~ LEDi: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA in trailing edge mode, 6 x 120 W/VA, 2 x 250 W/VA to 3 x 300 W/VA in leading edge mode.
- Inductive L-transformers with LED/low-voltage halogen lamps: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA.
- Electronic C-transformers with LED/low voltage halogen lamps: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA.
- Electronic LC transformers with LED/low-voltage halogen lamps: 6 x 120 W/VA, 2 x 250 W/VA to 3 x 300 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	12	UD/S 6.315.2.1	2CKA006197A0061			1



HS/S 4.2.1

Outside Light Sensor Interface, MDRC

The device is used for the connection and evaluation of up to 3 Outside Light Sensors LFO/A 1.1. The Outside Light Sensors can be analysed individually or combined. Amongst others 10 logical switching channels for the evaluation of threshold values are provided. Threshold values can be adjusted directly on the device. The device can be used as a twilight switch (1 ... 100 lx) or as a light value switch (100 ... 100.000 lx). One Outside Light Sensor LFO/A 1.1 is supplied with the device.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	3	HS/S 4.2.1	2CDG120044R0011		0.24	1



LFO/A 1.1

Outside Light Sensor for HS/S4.2.1, SM

Outside Light Sensor for the connection with the Interface HS/S 4.2.1.
Temperature range (sensor): -40 °C to +70 °C.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LFO/A 1.1	2CDG120045R0011		0.05	1

ABB i-bus® KNX

Movement and Presence Detection

	Mini Basic 6131/20- xxx-500	Mini Premium 6131/21- xxx-500	Basic 6131/30- xxx-500	Premium 6131/31- xxx-500	Sky 6131/40- xxx-500	Corridor Basic 6131/50- xxx-500	Corridor Premium 6131/51- xxx-500
General							
Supply voltage	KNX	KNX	KNX	KNX	KNX	KNX	KNX
Type of installation	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted
Programming button accessible from outside	■	■	■	■	■	■	■
Detection range diameter (sitting/frontal/lateral)							
Installation height 2.5 m	Max. 5.0 m/ 4.5 m/ 6.5 m	Max. 5.0 m/ 4.5 m/ 6.5 m	Max. 8.0 m/ 7.0 m/ 10.0 m	Max. 8.0 m/ 7.0 m/ 10.0 m	–	Max. –/ 18 x 2.5 m/ 24 x 2.5 m	Max. –/ 18 x 2.5 m/ 24 x 2.5 m
Installation height 3.0 m	Max. 6.5 m/ 6.0 m/ 8.0 m	Max. 6.5 m/ 6.0 m/ 8.0 m	Max. 10.0 m/ 8.0 m/ 12.0 m	Max. 10.0 m/ 8.0 m/ 12.0 m	–	Max. –/ 20 x 2.5 m/ 30 x 2.5 m	Max. –/ 20 x 2.5 m/ 30 x 2.5 m
Installation height 4.0 m	Max. 9.0 m/ 7.0 m/ 10.5 m	Max. 9.0 m/ 7.0 m/ 10.5 m	Max. 14.0 m/ 10.0 m/ 16.0 m	Max. 14.0 m/ 10.0 m/ 16.0 m	–	Max. –/ 20 x 2.5 m/ 30 x 2.5 m	Max. –/ 20 x 2.5 m/ 30 x 2.5 m
Installation height 6.0 m	–	–	–	–	Max. –/ 18.0 m/ 18.0 m	–	–
Installation height 12.0 m	–	–	–	–	Max. –/ 18.0 m/ 18.0 m	–	–
Channels							
Overall number of channels	2	4	2	4	2	2	4
Movement detector	2	4	2	4	2	2	4
Constant light switch	2	4	2	4	2	2	4
Constant light controller	–	2	–	2	–	–	2
Heating/cooling/ventilation systems (HVAC)	–	1	–	1	–	–	1
Infrared receiver, can be operated via IR remote control 6010-25	–	10 button pairs + 4 single buttons/ 24 single buttons	–	10 button pairs + 4 single buttons/ 24 single buttons	(only red for activation of the programming mode)	–	10 button pairs + 4 single buttons/ 24 single buttons
Two power-off stages							
Movement detector	■	■	■	■	■	■	■
Constant light control	–	■	–	■	–	–	■

—
■ = Function is supported
– = Function is not supported

ABB i-bus® KNX

Movement and Presence Detection

	Mini Basic 6131/20- xxx-500	Mini Premium 6131/21- xxx-500	Basic 6131/30- xxx-500	Premium 6131/31- xxx-500	Sky 6131/40- xxx-500	Corridor Basic 6131/50- xxx-500	Corridor Premium 6131/51- xxx-500
Application							
Movement detector	■	■	■	■	■	■	■
Surveillance detector	■	■	■	■	■	■	■
Constant light switch	■	■	■	■	–	–	–
Constant light controller	■	■	■	■	■	■	■
Controller independent of movement	–	■	–	■	–	–	■
Various							
Integrated object room temperature controller	–	1	–	1	–	–	1
With temperature sensor	–	■	–	■	–	■	–
Integrated humidity controller with dew point alarm	–	–	–	–	–	–	–
With humidity sensor	–	–	–	–	–	–	–
Brightness measurement	■	■	■	■	■	■	■
Calibration of brightness sensor via ETS group objects	■	■	■	■	■	■	■
IP rating	IP20	IP20	IP20	IP20	IP20	IP20	IP20
KNX Data Secure	–	–	–	–	–	–	–
Programming mode can be activated via IR remote control 6010-25	–	■	–	■	■	–	■
Programming LED can be activated via ETS group objects	■	■	■	■	■	■	■
Number of logic functions	–	5	–	5	–	–	5

—
 ■ = Function is supported
 – = Function is not supported

	Basic BMH/U2.1.1-xxx	Basic IP55 BMH/U2.55.1-xxx	Premium BMH/U4.5.1-xxx	Basic PMH/U2.1.1-xxx	Premium PMH/U4.5.1-xxx
General					
Supply voltage	KNX	KNX	KNX	KNX Aux. Input 24 V DC	KNX Aux. Input 24 V DC
Type of installation	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted
Programming button accessible from outside	■	■	■	■	■
Detection range diameter (sitting/frontal/lateral)					
Installation height 2.5 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m
Installation height 3.0 m	Max. –/ 10.0 m/ 12.0 m	Max. –/ 10.0 m/ 12.0 m	Max. –/ 10.0 m/ 12.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m
Installation height 4.0 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m
Installation height 6.0 m	–	–	–	–	–
Installation height 12.0 m	–	–	–	–	–
Channels					
Overall number of channels	2	2	4	2	4
Movement detector	2	2	4	2	4
Constant light switch	2	2	4	2	4
Constant light controller	–	–	4	–	4
Heating/cooling/ventilation systems (HVAC)	–	–	4	–	4
Infrared receiver, can be operated via IR remote control 6010-25	–	–	–	–	–
Two power-off stages					
Movement detector	■	■	■	■	■
Constant light control	–	–	■	–	■

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

Movement and Presence Detection

	Basic BMH/U2.1.1-xxx	Basic IP55 BMH/U2.55.1-xxx	Premium BMH/U4.5.1-xxx	Basic PMH/U2.1.1-xxx	Premium PMH/U4.5.1-xxx
Application					
Movement detector	■	■	■	■	■
Surveillance detector	■	■	■	■	■
Constant light switch	■	■	■	■	■
Constant light controller	–	–	■	–	■
Controller independent of movement	–	–	■	–	■
Various					
Integrated object room temperature controller	–	–	1	–	1
With temperature sensor	■	–	■	■	■
Integrated humidity controller with dew point alarm	–	–	1	–	1
With humidity sensor	■	–	■	■	■
Brightness measurement	■	■	■	■	■
Calibration of brightness sensor via ETS group objects	■	■	■	■	■
IP rating	IP20	IP55	IP20	IP20	IP20
KNX Data Secure	■	■	■	■	■
Programming mode can be activated via IR remote control 6010-25	–	–	–	–	–
Programming LED can be activated via ETS group objects	■	■	■	■	■
Number of logic functions	1	1	5	1	5

—
 ■ = Function is supported
 – = Function is not supported

	Standard PMB/U1.1-916	Corridor PMB/U2.1-916	Wide Range PMB/U3.1-916	Flat BMB/U1.1-916
General				
Supply voltage	KNX	KNX	KNX	KNX
Type of installation	flush- mounted/ surface-mounted	flush- mounted/ surface-mounted	flush- mounted/ surface-mounted	flush- mounted
Programming button accessible from outside	–	–	–	■
Detection range diameter (sitting/frontal/lateral)				
Installation height 2.5 m	Max. 4.5 m/ 2.5 m/ 8.0 m	Max. – / 12 x 2.5 m / 32 x 2.5 m	Max. 4.5 m/ 2.5 m/ 20.0 m	Max. 4.0 m/ 2.0 m/ 9.0 m
Installation height 3.0 m	Max. 6.0 m/ 4.0 m/ 10.0 m	Max. – / 16 x 3.0 m / 40 x 5.0 m	Max. 6.0 m/ 4.0 m/ 24.0 m	Max. 6.0 m/ 4.0 m/ 11.0 m
Installation height 4.0 m	Max. – / 5.0 m/ 12.0 m	Max. – / 16 x 3.0 m / 40 x 5.0 m	Max. – / 5.0 m/ 30.0 m	Max. – / 5.0 m/ 12.0 m
Installation height 6.0 m	–	–	–	–
Installation height 12.0 m	–	–	–	–
Channels				
Overall number of channels	4	4	4	4
Movement detector	2	2	2	2
Constant light switch	–	–	–	–
Constant light controller	1	1	1	1
Heating/cooling/ventilation systems (HVAC)	1	1	1	1
Infrared receiver, can be operated via IR remote control 6010-25	–	–	–	–
Two power-off stages				
Movement detector	■	■	■	■
Constant light control	■	■	■	■

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

Movement and Presence Detection

	Standard PMB/U1.1-916	Corridor PMB/U2.1-916	Wide Range PMB/U3.1-916	Flat BMB/U1.1-916
Application				
Movement detector	■	■	■	■
Surveillance detector	–	–	–	–
Constant light switch	–	–	–	–
Constant light controller	■	■	■	■
Controller independent of movement	■	■	■	■
Various				
Integrated object room temperature controller	–	–	–	–
With temperature sensor	■	■	■	■
Integrated humidity controller with dew point alarm	–	–	–	–
With humidity sensor	–	–	–	–
Brightness measurement	■	■	■	■
Calibration of brightness sensor via ETS group objects	■	■	■	■
IP rating	IP20	IP20	IP20	IP20
KNX Data Secure	■	■	■	■
Programming mode can be activated via IR remote control 6010-25	–	–	–	–
Programming LED can be activated via ETS group objects	■	■	■	■
Number of logic functions	1	1	1	1

—
 ■ = Function is supported
 – = Function is not supported



BMH/U2.1.1-885

Movement Detector HF KNX, Basic**NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m, max. 12 m and max. 10 m. 5,8 GHz HF technology. With 2 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light switch with up to two independent channels. Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x). The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMH/U2.1.1-884	2TYZ510205G0601			1
black	–	BMH/U2.1.1-885	2TYZ510205G0701			1



BMH/U2.55.1-884

Movement Detector HF KNX, Basic, IP55**NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m, max. 12 m and max. 10 m. 5,8 GHz HF technology. With 2 channels and integrated brightness sensor. IP55 protection. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light switch with up to two independent channels. Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x). The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMH/U2.55.1-884	2TYZ510505G0601			1
black	–	BMH/U2.55.1-885	2TYZ510505G0701			1



BMH/U4.5.1-884

Movement Detector HF KNX, Premium**NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m, max. 12 m and max. 10 m. 5,8 GHz HF technology. With 4 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light controller with up to two independent channels. Constant light controller with max. 2 outputs for brightness-dependent switching of two light bands in the area. Integrated object room temperature controller. Incl. 5 logic channels. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x). The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMH/U4.5.1-884	2TYZ510215G0601			1
black	–	BMH/U4.5.1-885	2TYZ510215G0701			1

ABB i-bus® KNX

Movement and Presence Detection



PMH/U2.1.1-884

Presence Detector HF KNX, Basic

NEW

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m. 24 GHz HF technology. Adjustable detection range via ETS application. With 2 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light switch with up to two independent channels. Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x). The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMH/U2.1.1-884	2TYZ510202G0601			1
black	–	PMH/U2.1.1-885	2TYZ510202G0701			1



PMH/U4.5.1-884

Presence Detector HF KNX, Premium

NEW

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m. 24 GHz HF technology. Adjustable detection range via ETS application. With 4 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light controller with up to two independent channels. Constant light controller with max. 2 outputs for brightness-dependent switching of two light bands in the area. Integrated object room temperature controller. Incl. 5 logic channels. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x). The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMH/U4.5.1-884	2TYZ510212G0601			1
black	–	PMH/U4.5.1-885	2TYZ510212G0701			1



PMA/K2.1-884

Presence Detector HF, VDE mounting kit

NEW

VDE Mounting Kit for Movement Detector HF and Presence Detector HF.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMA/K2.1-884	2TYZ510000G0603			1
black	–	PMA/K2.1-885	2TYZ510000G0703			1



PMA/K1.1-884

Presence Detector HF, BS mounting kit
British Standard Mounting Kit for Movement Detector HF and Presence Detector HF.

NEW

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMA/K1.1-884	2TYZ510000G0601			1
black	–	PMA/K1.1-885	2TYZ510000G0701			1



PMA/A1.1-884

Presence Detector HF, SM box
Surface Mounting Box for Movement Detector HF and Presence Detector HF.

NEW

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMA/A1.1-884	2TYZ510000G0602			1
black	–	PMA/A1.1-885	2TYZ510000G0702			1

ABB i-bus® KNX

Movement and Presence Detection



PMB/U1.1-916

ABB Presence detector BasicLINE KNX Standard

NEW

Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).
 Sitting persons Ø: 4.5 m/6.0 m/–.
 Frontal walking Ø: 2.5 m/4.0 m/5.0 m.
 Lateral walking Ø: 8.0 m/10.0 m/12.0 m.
 Sensitivity of the watchdog adjustable via ETS-parameter.
 Operating modes: Automatic, Semi-automatic.
 For switching on/off light bands depending on the room brightness.
 Regulation in response to the movement possible.
 Using the device as presence and/or movement detector.
 2 channels for detector application, 1 channel for constant light control and 1 channel for HVAC.
 Integrated brightness sensor.
 Integrated temperature sensor.
 Brightness range: 10 - 3.000 Lux.
 Brightness adjustment via KNX communication objects.
 Two-stage switch-off with delay time and reduced brightness.
 The KNX programming LED can be activated for the walk-test function via KNX.
 With integrated KNX bus coupler and power supply via KNX bus.
 Easy Master-Slave operation of several presence detectors possible.
 Mounting height: 2 m - 4 m.
 Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
 Hole size: Ø 68 mm.
 Suitable for surface mounting installations in combination with the surface-mounted box 6884-500.
 Cannot be installed in British Standard box.
 Dimensions: (H x D): 45 mm * 105 mm.
 Visible height: 23.5 mm.
 Mounting depth: 21.5 mm.
 Mounting depth (including spring clip): 48.0 mm * 65.0 mm.
 Temperature range (device): –20 °C – +45 °C.
 Storage temperature range: –20 °C – +70 °C.
 Protection class (device): IP 20 (IP54 in combination with 6884-500).
 The devices support KNX Data Secure.

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
white	–	PMB/U1.1-916	2CKA006132A0462			1



PMB/U2.1-916

NEW**ABB Presence detector BasicLINE KNX Corridor**

Detection range (for mounting height 2.5 m, 3 m and 4 m):

Sitting persons Ø: –/–/–.

Frontal walking Ø: 12.0 x 2.5 m/16.0 x 3.0 m/16.0 x 3.0 m.

Lateral walking Ø: 32.0 x 2.5 m/40.0 x 5.0 m/40.0 x 5.0 m.

Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Semi-automatic.

For switching on/off light bands depending on the room brightness.

Regulation in response to the movement possible.

Using the device as presence and/or movement detector.

2 channels for detector application, 1 channel for constant light control and

1 channel for HVAC.

Integrated brightness sensor.

Integrated temperature sensor.

Brightness range: 10 - 3.000 Lux.

Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Easy Master-Slave operation of several presence detectors possible.

Mounting height: 2 m - 4 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.

Hole size: Ø 68 mm.

Suitable for surface mounting installations in combination with the surface-mounted box 6884-500.

Cannot be installed in British Standard box.

Dimensions: (H x D): 60.0 mm * 105 mm.

Visible height: 38.0 mm.

Mounting depth: 21.5 mm.

Mounting depth (including spring clip): 48.0 mm * 65.0 mm.

Temperature range (device): –20 °C – +45 °C.

Storage temperature range: –20 °C – +70 °C.

Protection class (device): IP 20 (IP54 in combination with 6884-500).

The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMB/U2.1-916	2CKA006132A0464			1

ABB i-bus® KNX

Movement and Presence Detection



PMB/U3.1-916

NEW

ABB Presence detector BasicLINE KNX Wide Range

Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).

Sitting persons Ø: 4.5 m/6.0 m/–.

Frontal walking Ø: 2.5 m/4.0 m/5.0 m.

Lateral walking Ø: 20.0 m/24.0 m/30.0 m.

Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Semi-automatic.

For switching on/off light bands depending on the room brightness.

Regulation in response to the movement possible.

Using the device as presence and/or movement detector.

2 channels for detector application, 1 channel for constant light control and 1 channel for HVAC.

Integrated brightness sensor.

Integrated temperature sensor.

Brightness range: 10 - 3.000 Lux.

Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Easy Master-Slave operation of several presence detectors possible.

Mounting height: 2 m - 4 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.

Hole size: Ø 68 mm.

Suitable for surface mounting installations in combination with the surface-mounted box 6884-500.

Cannot be installed in British Standard box.

Dimensions: (H x D): 66.5 mm * 105 mm.

Visible height: 44.5 mm.

Mounting depth: 21.5 mm.

Mounting depth (including spring clip): 48.0 mm * 65.0 mm.

Temperature range (device): –20 °C – +45 °C.

Storage temperature range: –20 °C – +70 °C.

Protection class (device): IP 20 (IP54 in combination with 6884-500).

The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMB/U3.1-916	2CKA006132A0466			1



BMB/U1.1-916

NEW**ABB Presence detector Flat KNX**

Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).

Sitting persons Ø: 4.0 m/6.0 m/–.

Frontal walking Ø: 2.0 m/4.0 m/5.0 m.

Lateral walking Ø: 9.0 m/11.0 m/12.0 m.

Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Semi-automatic.

For switching on/off light bands depending on the room brightness.

Regulation in response to the movement possible.

Using the device as presence and/or movement detector.

2 channels for detector application, 1 channel for constant light control and 1 channel for HVAC.

Integrated brightness sensor.

Integrated temperature sensor.

Brightness range: 10 - 3.000 Lux.

Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Easy Master-Slave operation of several presence detectors possible.

Mounting height: 2 m - 4 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.

Hole size: Ø 46 mm.

Cannot be installed in British Standard or VDE mounting box.

Dimensions: (H x D): 37.0 mm * 56.0 mm

Visible height: 1.0 mm.

Mounting depth: 34.5 mm.

Temperature range (device): –20 °C – +45 °C.

Storage temperature range: –20 °C – +70 °C.

Protection class (device): IP 20.

The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMB/U1.1-916	2CKA006132A0468			1

ABB i-bus® KNX

Movement and Presence Detection



Presence Detector, Mini, Basic, 8 Meter, FM

Presence detector with 4 individual PIR sensors (single switch-off) and 2 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular). Seated persons Ø: 5 m, 6.5 m and 9 m. Walking persons Ø: 6.5 m, 8 m and 10.5 m. Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For switching on/off light bands depending on the room brightness.

Regulation in response to the movement possible.

Using the device as presence and/or movement detector.

2 channels for detector application with integrated monitoring function or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area).

Integrated brightness sensor.

Weighting of up to 2 external brightness values and the internal brightness sensor possible.

Brightness range: 1 – 1.000 Lux.

Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

The KNX programming button is accessible without demounting the detector.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Scene control via KNX.

Easy Master-Slave operation of several presence detectors possible.

Firmware update via ETS and KNX Firmware Update App.

Mounting height: 2 m - 4 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.

Hole size: Ø 68 mm.

Suitable for surface mounting installations in combination with the surface-mounted box 6131/29-xxx(-500).

Cannot be installed in British Standard or VDE flush-mounted box.

Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).

Dimensions (L x W x D): 80 mm x 80 mm x 45 mm.

Visible height: 16 mm.

Mounting depth: 29 mm.

Temperature range (device): –5 °C – +45 °C.

Storage temperature range: –25 °C – +55 °C.

Transport temperature range: –25 °C – +70 °C.

Protection class (device): IP 20.

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
studio white matt	–	6131/20-24-500	2CKA006132A0342	€	kg	pc.
aluminium silver	–	6131/20-183-500	2CKA006132A0343	0.13	1	
black matt	–	6131/20-885-500	2CKA006132A0436	0.13	1	



Presence Detector, Mini, Premium, 8 Meter, FM

Presence detector with 4 individual PIR sensors (single switch-off) and 4 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular). Seated persons Ø: 5 m, 6.5 m and 9 m. Walking persons Ø: 6.5 m, 8 m and 10.5 m. Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For dimming/control the brightness to a defined value in the detection area. 4 channels for detector application with integrated monitoring function or up to 4 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area) or up to 2 channels for constant light control (max. 2 outputs for dimming daylight control/control of two rooflights in the room) or up to 1 channel for HVAC functions for controlling heating and/or cooling systems and ventilation systems in the detection area. Integrated brightness sensor. Weighting of up to 2 external brightness values and the internal brightness sensor possible. Brightness range: 1 – 1.000 Lux. Brightness adjustment via KNX communication objects. Two-stage switch-off with delay time and reduced brightness. Incl. 5 logic functions (logic gates, gates, delay and staircase lighting). Integrated object room temperature controller with temperature sensor. The KNX programming button is accessible without demounting the detector. The KNX programming LED can be activated for the walk-test function via KNX. With integrated KNX bus coupler and power supply via KNX bus. Scene control via KNX. Easy Master-Slave operation of several presence detectors possible. Firmware update via ETS and KNX Firmware Update App. Integrated IR receiver for activation of the KNX programming mode via the IR remote control 6010-25(-500) (phased-out) and 10 freely programmable IR channels (blue and/or white function buttons). Alternatively via a teachable IR remote control with RC5 code. Mounting height: 2 m - 4 m. Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip. Hole size: Ø 68 mm. Suitable for surface mounting installations in combination with the surface-mounted box 6131/29-xxx(-500). Cannot be installed in British Standard or VDE flush-mounted box. Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501). Dimensions (L x W x D): 80 mm x 80 mm x 45 mm. Visible height: 16 mm. Mounting depth: 29 mm. Temperature range (device): -5 °C – +45 °C. Storage temperature range: -25 °C – +55 °C. Transport temperature range: -25 °C – +70 °C. Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/21-24-500	2CKA006132A0344		0.13	1
aluminium silver	–	6131/21-183-500	2CKA006132A0345		0.13	1
black matt	–	6131/21-885-500	2CKA006132A0438		0.13	1

ABB i-bus® KNX

Movement and Presence Detection



6131/30-24-500

Presence Detector, Basic, 12 Meter, FM

Presence detector with 4 individual PIR sensors (single switch-off) and 2 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular). Seated persons Ø: 8 m, 10 m and 14 m. Walking persons Ø: 10 m, 12 m and 16 m. Sensitivity of the watchdog adjustable via ETS-parameter. Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For switching on/off light bands depending on the room brightness. Regulation in response to the movement possible. Using the device as presence and/or movement detector. 2 channels for detector application with integrated monitoring function or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area). Integrated brightness sensor. Weighting of up to 2 external brightness values and the internal brightness sensor possible. Brightness range: 1 - 1.000 Lux. Brightness adjustment via KNX communication objects. Two-stage switch-off with delay time and reduced brightness. The KNX programming button is accessible without demounting the detector. The KNX programming LED can be activated for the walk-test function via KNX. With integrated KNX bus coupler and power supply via KNX bus. Scene control via KNX. Easy Master-Slave operation of several presence detectors possible. Firmware update via ETS and KNX Firmware Update App. Mounting height: 2 m - 4 m. Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip. Hole size: Ø 68 mm. Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500) or intermediate ring for VDE flush-mounted box 6131/38-xxx(-500). Cannot be installed in British Standard or VDE flush-mounted box. Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501). Dimensions (L x W x D): 91 mm x 91 mm x 45 mm. Visible height: 23 mm. Mounting depth: 22 mm. Temperature range (device): -5 °C – +45 °C. Storage temperature range: -25 °C – +55 °C. Transport temperature range: -25 °C – +70 °C. Protection class (device): IP 20.

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
studio white matt	–	6131/30-24-500	2CKA006132A0346		0.15	1
aluminium silver	–	6131/30-183-500	2CKA006132A0347		0.15	1
black matt	–	6131/30-885-500	2CKA006132A0440		0.15	1



6131/31-24-500

Presence Detector, Premium, 12 Meter, FM

Presence detector with 4 individual PIR sensors (single switch-off) and 4 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular). Seated persons Ø: 8 m, 10 m and 14 m. Walking persons Ø: 10 m, 12 m and 16 m. Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For dimming/control the brightness to a defined value in the detection area. 4 channels for detector application with integrated monitoring function or up to 4 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area) or up to 2 channels for constant light control (max. 2 outputs for dimming daylight control/control of two rooflights in the room) or up to 1 channel for HVAC functions for controlling heating and/or cooling systems and ventilation systems in the detection area.

Integrated brightness sensor.

Weighting of up to 2 external brightness values and the internal brightness sensor possible.

Brightness range: 1 - 1.000 Lux.

Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

Incl. 5 logic functions (logic gates, gates, delay and staircase lighting).

Integrated object room temperature controller with temperature sensor.

The KNX programming button is accessible without demounting the detector.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Scene control via KNX.

Easy Master-Slave operation of several presence detectors possible.

Firmware update via ETS and KNX Firmware Update App.

Integrated IR receiver for activation of the KNX programming mode via the IR remote control 6010-25(-500) (phased-out) and 10 freely programmable IR channels (blue and/or white function buttons). Alternatively via a teachable IR remote control with RC5 code.

Mounting height: 2 m - 4 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.

Hole size: Ø 68 mm.

Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500).

Cannot be installed in British Standard or VDE flush-mounted box.

Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).

Dimensions (L x W x D): 91 mm x 91 mm x 45 mm.

Visible height: 23 mm.

Mounting depth: 22 mm.

Temperature range (device): -5 °C – +45 °C.

Storage temperature range: -25 °C – +55 °C.

Transport temperature range: -25 °C – +70 °C.

Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/31-24-500	2CKA006132A0348		0.15	1
aluminium silver	–	6131/31-183-500	2CKA006132A0349		0.15	1
black matt	–	6131/31-885-500	2CKA006132A0443		0.15	1

ABB i-bus® KNX

Movement and Presence Detection



6131/40-24-500

Movement Detector, Sky, white, FM

Movement detector with 4 individual PIR sensors (single switch-off) and 2 independent channels. Detection range (for mounting height 6 m and 12 m): 360° (circular).

Walking persons Ø: 18 m, 24 m.

Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application).

For switching on/off light bands depending on the room brightness.

Regulation in response to the movement possible.

Using the device as presence and/or movement detector.

2 channels for detector application with integrated monitoring function

or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area).

Integrated brightness sensor.

Weighting of up to 2 external brightness values and the internal brightness sensor possible.

Brightness range: 1 – 1.000 Lux.

Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

The KNX programming button is accessible without demounting the detector.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Scene control via KNX.

Easy Master-Slave operation of several presence detectors possible.

Firmware update via ETS and KNX Firmware Update App.

Integrated IR receiver for activation of the KNX programming mode via the IR remote control 6010-25(-500) (phased-out). Alternatively via a teachable IR remote control with RC5 code.

Mounting height: 4 to 12 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.

Hole size: Ø 68 mm.

Suitable for surface mounting installations in combination with the surface-mounted box 6131/29-xxx(-500) or intermediate ring for VDE flush-mounted box 6131/39-xxx(-500).

Cannot be installed in British Standard or VDE flush-mounted box.

Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).

Dimensions (L x W x D): 91 mm x 91 mm x 45 mm.

Visible height: 23 mm.

Mounting depth: 22 mm.

Temperature range (device): -5 °C – +45 °C.

Storage temperature range: -25 °C – +55 °C.

Transport temperature range: -25 °C – +70 °C.

Protection class (device): IP 20.

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
studio white matt	–	6131/40-24-500	2CKA006132A0350		0.15	1
black matt	–	6131/40-885-500	2CKA006132A0446		0.15	1



6131/50-24-500

Movement Detector, Corridor, Basic, FM

Movement detector with 2 sensor groups and 2 PIR sensors each (groups single switch-off) and max. 2 independent channels. Detection range: rectangular.

For mounting height 2.5 m: frontal approach max. 18 m x 2.5 m (per side max. 9 m x 2.5 m).

Lateral movement max. 24 m x 2.5 m (per side max. 12 m x 2.5 m).

For mounting height 3 m as well as 4 m: frontal approach max. 20 m x 3 m (per side max. 10 m x 3 m). Lateral movement max. 30 m x 3 m (per side max. 15 m x 3 m).

Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application).

For switching on/off light bands depending on the room brightness.

Regulation in response to the movement possible.

Using the device as presence and/or movement detector.

2 channels for detector application with integrated monitoring function

or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area).

Integrated brightness sensor.

Weighting of up to 2 external brightness values and the internal brightness sensor possible.

Brightness range: 1 – 1.000 Lux.

Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

The KNX programming button is accessible without demounting the detector.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Scene control via KNX.

Easy Master-Slave operation of several presence detectors possible.

Firmware update via ETS and KNX Firmware Update App.

Mounting height: 2 m - 4 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.

Hole size: Ø 68 mm.

Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500) or intermediate ring for VDE flush-mounted box 6131/38-xxx(-500).

Cannot be installed in British Standard or VDE flush-mounted box.

Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).

Dimensions (L x W x D): 91 mm x 91 mm x 49 mm.

Visible height: 27 mm.

Mounting depth: 22 mm.

Temperature range (device): -5 °C – +45 °C.

Storage temperature range: -25 °C – +55 °C.

Transport temperature range: -25 °C – +70 °C.

Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/50-24-500	2CKA006132A0399		0.16	1
aluminium silver	–	6131/50-183-500	2CKA006132A0400		0.16	1
black matt	–	6131/50-885-500	2CKA006132A0449		0.16	1

ABB i-bus® KNX

Movement and Presence Detection



6131/51-24-500

Movement Detector, Corridor, Premium, FM

Movement detector with 2 sensor groups and 2 PIR sensors each (groups single switch-off) and max. 4 independent channels. Detection range: rectangular.

For mounting height 2.5 m: frontal approach max. 18 m x 2.5 m (per side max. 9 m x 2.5 m).

Lateral movement max. 24 m x 2.5 m (per side max. 12 m x 2.5 m).

For mounting height 3 m as well as 4 m: frontal approach max. 20 m x 3 m (per side max. 10 m x 3 m). Lateral movement max. 30 m x 3 m (per side max. 15 m x 3 m).

Sensitivity of the watchdog adjustable via ETS-parameter.

Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application).

For dimming/control the brightness to a defined value in the detection area.

4 channels for detector application with integrated monitoring function

or up to 4 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area)

or up to 2 channels for constant light control (max. 2 outputs for dimming daylight control/control of two rooflights in the room)

or up to 1 channel for HVAC functions for controlling heating and/or cooling systems and ventilation systems in the detection area. Integrated brightness sensor.

Weighting of up to 2 external brightness values and the internal brightness sensor possible.

Brightness range: 1 – 1.000 Lux. Brightness adjustment via KNX communication objects.

Two-stage switch-off with delay time and reduced brightness.

Incl. 5 logic functions (logic gates, gates, delay and staircase lighting).

Integrated object room temperature controller with temperature sensor.

The KNX programming button is accessible without demounting the detector.

The KNX programming LED can be activated for the walk-test function via KNX.

With integrated KNX bus coupler and power supply via KNX bus.

Scene control via KNX. Easy Master-Slave operation of several presence detectors possible.

Firmware update via ETS and KNX Firmware Update App.

Integrated IR receiver for activation of the KNX programming mode via the IR remote control

6010-25(-500) (phased-out) and 10 freely programmable IR channels (blue and/or white function buttons). Alternatively via a teachable IR remote control with RC5 code.

Mounting height: 2 m - 4 m.

Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip. Hole size: Ø 68 mm.

Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500).

Cannot be installed in British Standard or VDE flush-mounted box.

Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).

Dimensions (L x W x D): 91 mm x 91 mm x 49 mm.

Visible height: 27 mm.

Mounting depth: 22 mm.

Temperature range (device): -5 °C – +45 °C.

Storage temperature range: -25 °C – +55 °C.

Transport temperature range: -25 °C – +70 °C.

Protection class (device): IP 20.

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
studio white matt	–	6131/51-24-500	2CKA006132A0413		0.16	1
aluminium silver	–	6131/51-183-500	2CKA006132A0414		0.16	1
black matt	–	6131/51-885-500	2CKA006132A0452		0.16	1



6131/29-24-500

Housing Presence Detector, Mini, SM

For installing a Presence Detector Mini Basic KNX 6131/20-xxx(-500) or a Presence Detector Mini Premium KNX 6131/21-xxx(-500).

Protection class (Device): IP 20. Dimensions (L x W x D): 80 mm x 80 mm x 35 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/29-24-500	2CKA006132A0351		0.08	1
aluminium silver	–	6131/29-183-500	2CKA006132A0352		0.08	1
black matt	–	6131/29-885-500	2CKA006132A0454		0.08	1



6131/39-24-500

Housing Presence Detector, SM

For mounting a Presence Detector Basic KNX 6131/30-xxx(-500), a Presence Detector Premium KNX 6131/31-xxx(-500), a Movement Detector Corridor Basic KNX 6131/50-xxx(-500), a Movement Detector Corridor Premium KNX 6131/51-xxx(-500) or a Movement Detector Sky KNX 6131/40-24(-500).

Protection class (Device): IP 20. Dimensions (L x W x D): 91 mm x 91 mm x 33 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/39-24-500	2CKA006132A0353		0.10	1
aluminium silver	–	6131/39-183-500	2CKA006132A0354		0.10	1
black matt	–	6131/39-885-500	2CKA006132A0455		0.10	1



6131/38-24

Intermediate ring for Presence/Movement Detector Basic, Premium, Sky and Corridor

For mounting a Presence Detector Basic KNX 6131/30-xxx(-500), a Presence Detector Premium KNX 6131/31-xxx(-500), a Movement Detector Corridor Basic KNX 6131/50-xxx(-500), a Movement Detector Corridor Premium KNX 6131/51-xxx(-500) or a Movement Detector Sky KNX 6131/40-24(-500).

Protection class (Device): IP 20. Dimensions (L x W x D): 91 mm x 91 mm x 22 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/38-24-500	2CKA006132A0403		0.08	1
aluminium silver	–	6131/38-183-500	2CKA006132A0404		0.08	1
black matt	–	6131/38-885-500	2CKA006132A0459		0.08	1

ABB i-bus® KNX

Movement and Presence Detection



BM/A4.1-135

Busch-Watchdog PRO 280° KNX

4 channel KNX movement detector for indoor and outdoor area. For automatic switching of ABB-i-bus KNX® actuators dependent on movement and brightness.

With 1 twilight/brightness channel with 3 switching thresholds.

With 1 temperature channel with three switching thresholds.

Remote operation via the Bluetooth and smartphone/tablet app.

Up to 10 KNX functions controllable via app. Programmable status RGB LED (5 functions).

With high-quality lens for optimum detection. Level balancing of the device +/-30°.

Horizonatal orientation of the optical system +90°/-60°. Vertical orientation of the optical system +30°/-30°. With ground and rear-field detection. Additional possibility for switch-on via push-button object. The bus can be connected via enclosed terminal block.

Optional: ABB-free@home® app for commissioning of basic and add-on parameters:

Switch-off time, Brightness Threshold, Continuously on and Continuously off. Programming only under connected bus voltage. With integrated dismounting protection. Individual adjustment of detection range via enclosed protective foil which can be cut to size.

With brightness-independent test mode for evaluating the detection zone.

Switch-off delay: 10 sec to 18 hours.

Adjustment of parameters via App: Switch-on brightness, Switch-off delay, permanent on, permanent off. Measurement of outdoor temperature and ambient brightness level at the device. Native ETS application required.

With automatic range stabilization. With automatic interference suppression.

With automatic dazzle-proofing. With 4 movement channels.

Surveillance density: 106 sectors with 424 switching segments.

Detection area: frontal: 16 m, lateral: 16 m.

Installation height: 2.5 m.

Twilight limiting values: 1 – 1.000 Lux.

Brightness limiting values: 1.000 – 80.000.

Sensor angle: 280°. Number of PIR: 4.

Bus voltage: 24 V.

With integrated KNX bus coupler.

No additional power supply necessary.

Power consumption: 0.3 W.

Current: 12 mA.

Protection class device: IP 55.

Temperature range device: -25 °C – +55 °C.

Storage temperature device: -25 °C – +70 °C.

Dimensions (H x W x D): 124 mm x 110 mm x 158 mm.

The devices support KNX Data Secure.

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
				€	kg	pc.
brown	–	BM/A4.1-131	2CKA006132A0425		0.385	1
aluminium silver	–	BM/A4.1-133	2CKA006132A0426		0.385	1
studio white	–	BM/A4.1-134	2CKA006132A0427		0.385	1
anthracite	–	BM/A4.1-135	2CKA006132A0428		0.385	1
stainless steel	–	BM/A4.1-136	2CKA006132A0429		0.385	1



6851/EA-135-500

Busch-Watchdog PRO Corner adapter

For detection on two sides of the house, in combination with Busch-Watchdog® PRO 280. It is mounted at the corner of the house, on the wall. For flush or surface cable entries.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
brown	–	6851/EA-131-500	2CKA006800A3084		0.385	1
aluminium silver	–	6851/EA-133-500	2CKA006800A3086		0.385	1
studio white	–	6851/EA-134-500	2CKA006800A3088		0.385	1
anthracite	–	6851/EA-135-500	2CKA006800A3090		0.385	1
stainless steel	–	6851/EA-136-500	2CKA006800A3092		0.385	1



6851/DR-135-500

Busch-Watchdog PRO Design Frame

Design frame for square and cubic design. For combination with all devices of Busch-Watchdog® PRO series. After wall mounted installation of the detector, the design frame could be putted over the Watchdog.

The design frame is fixed via Snap-On mechanism. Optional accessories. Retrofit installation possible.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
brown	–	6851/DR-131-500	2CKA006800A3094		0.385	1
aluminium silver	–	6851/DR-133-500	2CKA006800A3096		0.385	1
studio white	–	6851/DR-134-500	2CKA006800A3098		0.385	1
anthracite	–	6851/DR-135-500	2CKA006800A3100		0.385	1
stainless steel	–	6851/DR-136-500	2CKA006800A3102		0.385	1

Efficient climate control in one system

Product range for HVAC automation

Heating, ventilation, and air-conditioning automation – ClimaECO brings HVAC applications together in one holistic solution portfolio based on the standardized KNX system.



—
When it comes to HVAC you often have to deal with several systems. ABB ClimaECO offers one solution for everything.

HVAC control in one single system


ClimaECO is the holistic heating, ventilation, and air-conditioning (HVAC) automation solution for commercial buildings based on the proven ABB i-bus® KNX system. A solution that seamlessly integrates room automation, central HVAC functions, and management and automation into one system – a significant step towards increasing energy efficiency and reducing operational costs. ClimaECO – making your building more economical, sustainable, and comfortable.

HVAC automation from the room level to the management level

HVAC –

multiple functions


Heating, ventilation, and air-conditioning technology is made up of various systems that are now integrated into one system.

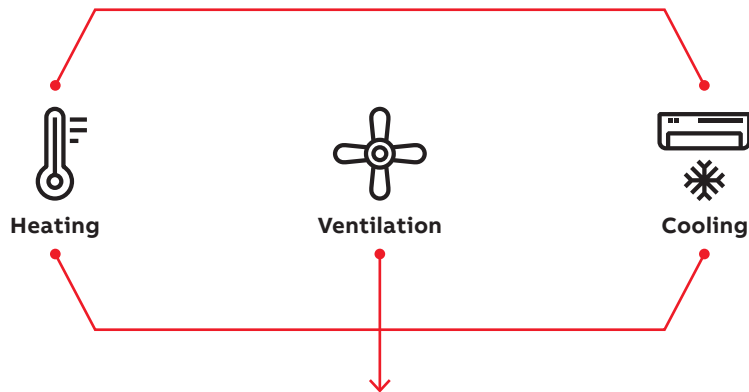

KNX –

a standardized system


With the proven ABB i-bus® KNX system it is possible to automate all HVAC applications and combine them into a single solution.



HVAC –

levels

ClimaECO combines the three different levels of HVAC automation, ranging from management level to central HVAC systems (generation and distribution) to room automation (energy consumption).

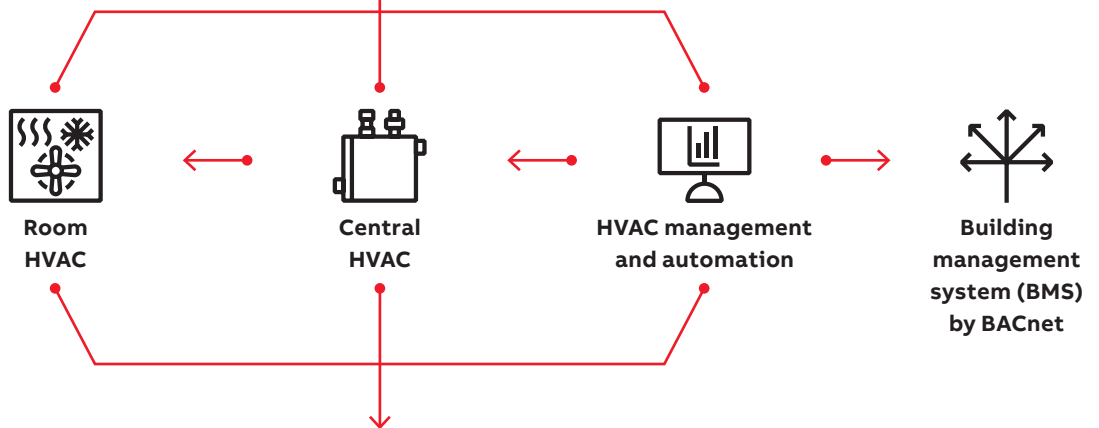

ClimaECO –

a holistic solution

ClimaECO bundles all functions and solutions for HVAC automation into a single integrated system. This saves you time and effort with planning, integration, and maintenance, while significantly increasing energy efficiency in buildings.

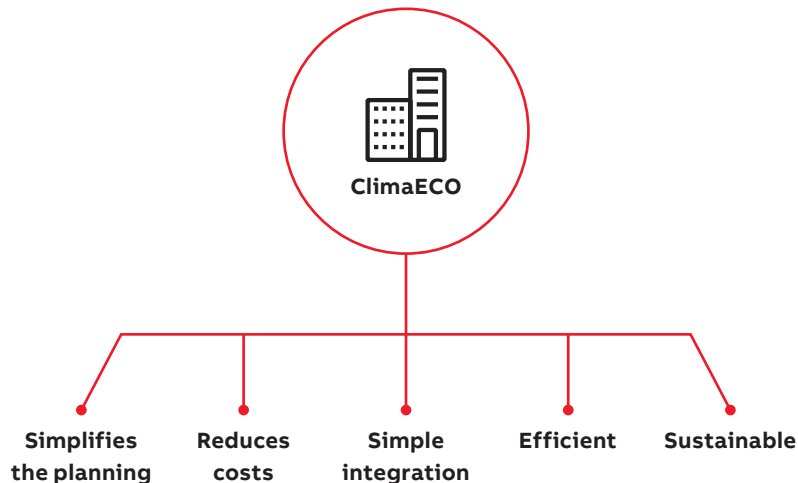


ABB i-bus® KNX

Heating, Ventilation and Air Conditioning – Influencing Variables on Room Climate

Influencing Variables on Room Temperature

Internal and external factors have an effect on the thermal conditions in a room or a building. As an external factor the solar radiation is important for the indoor temperature – particularly with regard to modern architecture with glass fronts. Besides this, the room temperature is strongly affected by the exchange of thermal energy through windows and walls as well as the loss of thermal energy through open doors and windows.

Depending on the intensity, all this interactions influence also the energy efficiency of a building and have therefore to be optimised.

Internal thermal inputs from lighting, devices or persons have also an influence on the room climate. By planning a heating, ventilation or air conditioning system all this internal and external factors have to be considered.

Influencing Variables on Air Quality

The indoor climate in living and working areas has a scientifically proven impact on health, job performance and well-being of people. A suitable indicator for determination of the room air quality is the CO₂ concentration. In addition the values for room temperature and air humidity must be controlled to meet the requirements for a comfortable room climate.

Studies have shown, that high CO₂ concentration in the air influences the well-being as well as the performance and learning ability of people. Besides the normal CO₂ concentration in the air, human respiration is an important factor increasing the CO₂ concentration in a room. Therefore it is important to measure the CO₂ concentration in rooms where many persons are present (schools, conference rooms, open-plan offices). Monitoring of thresholds enables fans to be switched via ABB i-bus® KNX allowing automatic control of the CO₂ concentration and sufficient supply of fresh air.

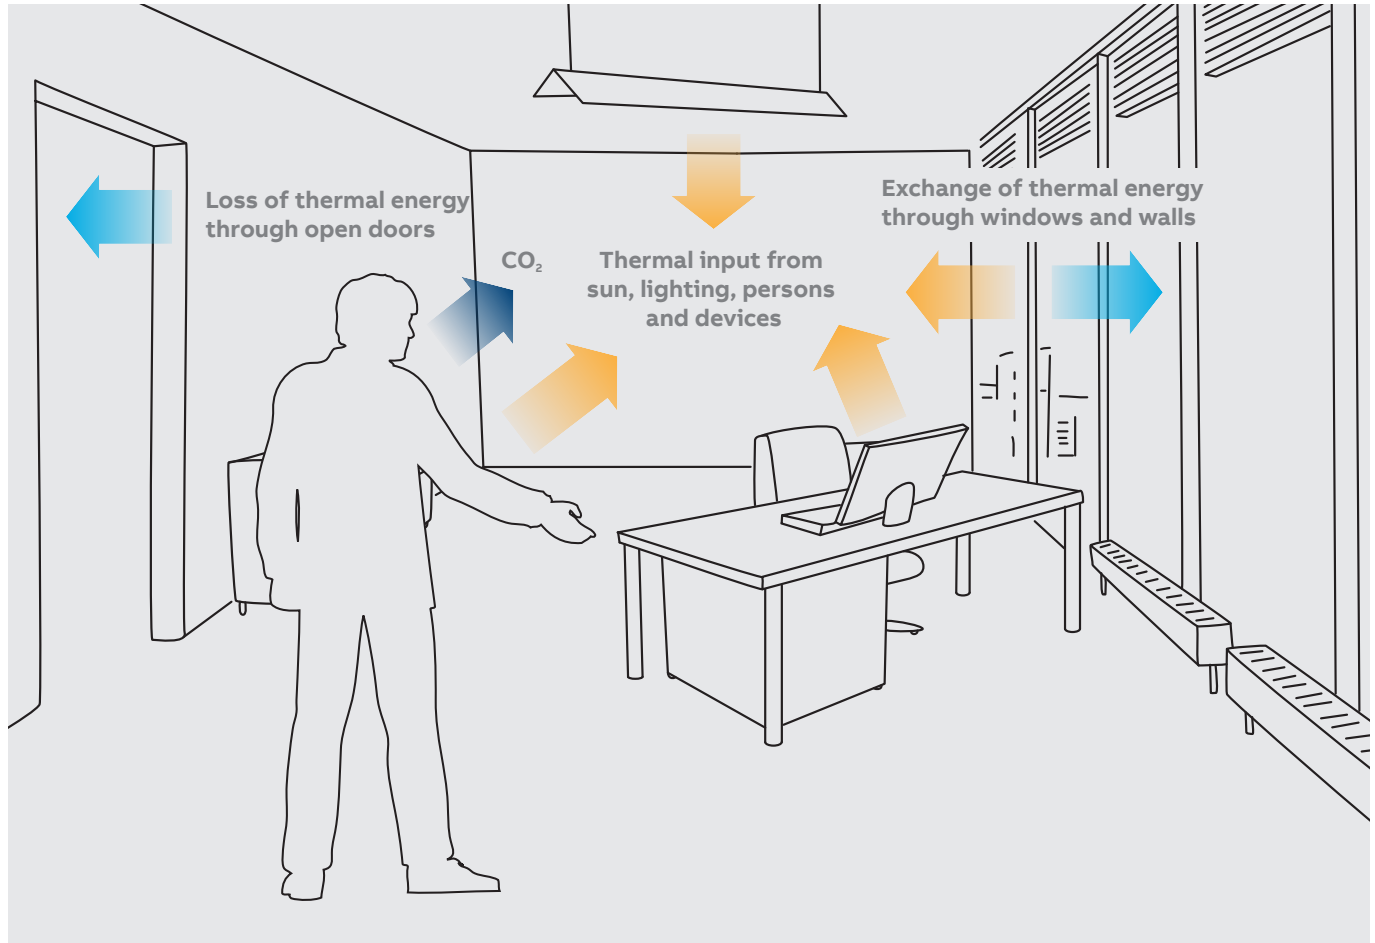


ABB i-bus® KNX

Heating, Ventilation and Air Conditioning –
ClimaECO Portfolio Overview

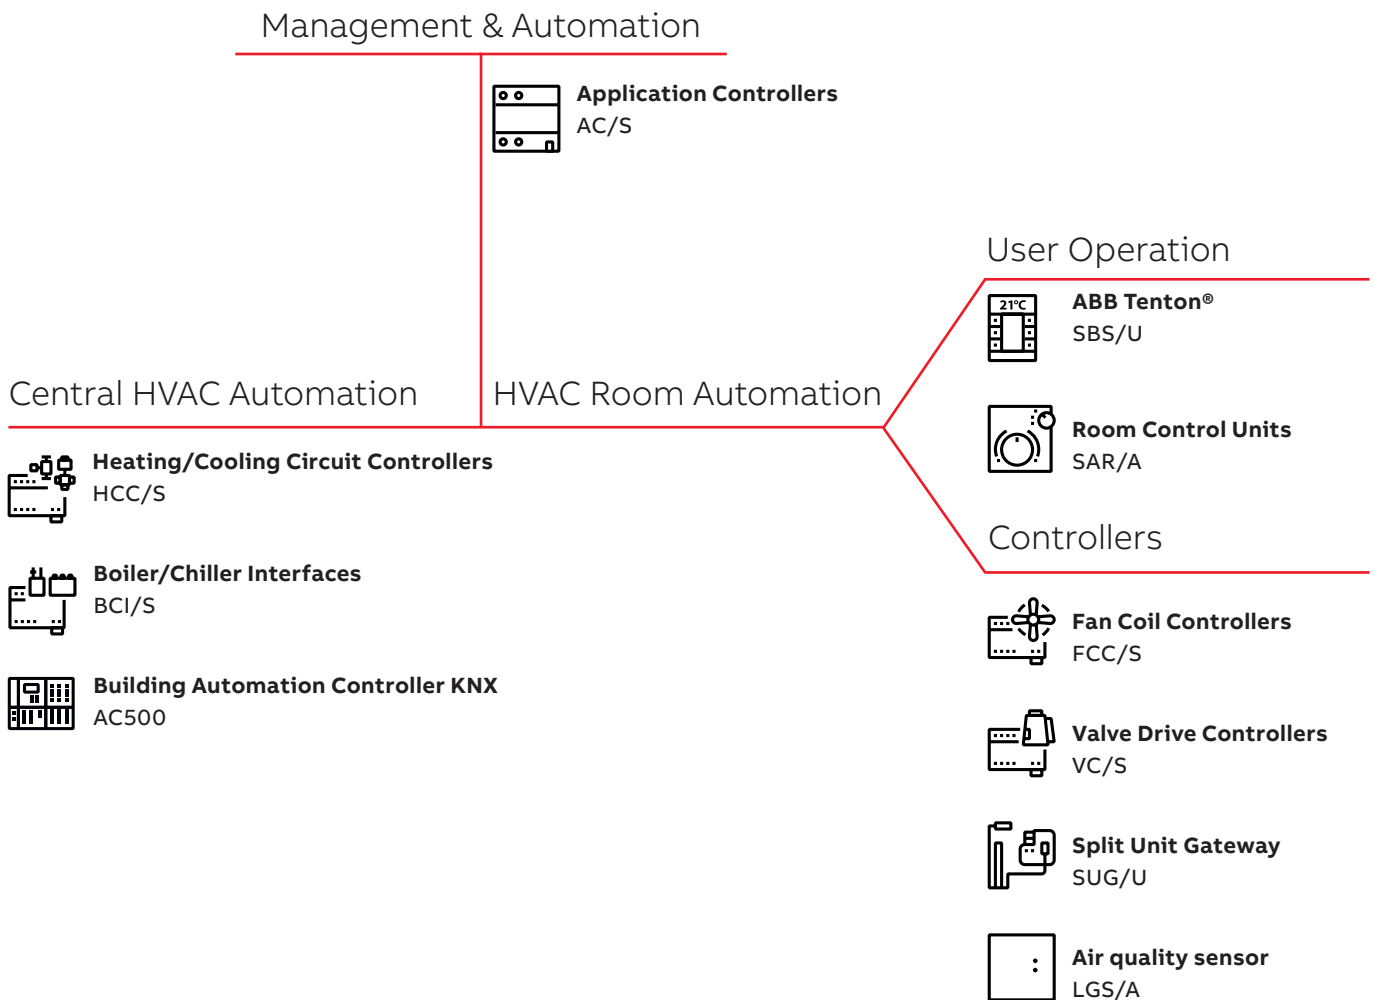


ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

	Electronic Relay ER/U 1.1 (with US/U 12.2)	Valve Drive Controller VC/S 4.1.1	Valve Drive Controller VC/S 4.2.1	Valve Drive Controller VC/S x.2.2.2 (x = 6/12)
General				
Supply voltage	24...250 V AC/DC	KNX	KNX	KNX
Type of installation	Flush-mounted	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	–	8	8	4/8
Current consumption, bus	< 12 mA	< 12 mA	< 12 mA	< 12 mA
Rated current (per channel)	0.5 A (resistive load)	250 mA	250 mA	250 mA
Inrush current (per channel)	1.2 A (1 min.)	300 mA (2 min., Tu = 60 °C)	300 mA (2 min., Tu = 60 °C)	≤ 1,3 A for 10 s (45 °C) per output pair
Maximum number of thermoelectric valve drives (per channel)	2 (230 V) 2 (24 V)	3 (230 V) 1 (24 V)	3 (230 V) 1 (24 V)	6 (230 V) 3 (24 V) per output pair
Outputs				
Number	1	4	4	6/12
Type	thermoelectric/ 2-point valve drive	thermoelectric/ 2-point valve drive	thermoelectric/ 2-point valve drive	thermoelectric/ 2-point valve drive
Output voltage	24... 230 V AC/DC	24...230 V AC	24...230 V AC	24...230 V AC
Manual operation				
Manual operation	–	–	■	■
Fault acknowledgement	–	–	■	■
Function				
KNX Data Secure	–	–	–	■
Forced operation	■ (via US/U 12.2)	■	■	■
Status	–	■	■	■
Adjustable control value after controller fault	■ (via US/U 12.2)	■	■	■
Valve purge	■ (via US/U 12.2)	■	■	■
Characteristic curve adaption	–	–	–	–
Blocking	–	–	–	–
Pump control without parenthesis (logic)	–	–	–	■
Service mode	–	–	–	■
Highest control value	–	–	–	■
Safety settings	–	–	–	■
Integrated room temperature controller (RTC)	–	■	■	■
Use in Master/Slave system with room operation units	–	■	■	■
Logic and Threshold	–	–	–	■
Control and diagnosis via ABB i-bus® Tool	–	■	■	■

■ = Function is supported

– = Function is not supported



VC/S 4.1.1

Valve Drive Controller, 4-fold, MDRC

For the control of heating and cooling applications in the room, such as radiator, floor heating or cooling ceiling. The device has 4 channels each for the independent control of a heating or cooling application. Each channel has an electronic valve output for the control of a thermoelectric valve drive, as well as 3 inputs to detect and monitor the room status (use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of each channel. Each channel has its own integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The VC/S 4.2.1 features an easy to use manual operation.

Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	VC/S 4.1.1	2CDG110216R0011		0.27	1
Manual Operation	8	VC/S 4.2.1	2CDG110217R0011		0.275	1



VC/S 6.2.2.2

Valve Drive Controller, Manual Operation, MDRC

NEW

For the control of heating and cooling applications within a room, such as radiators, floor heating, or cooling ceilings. Each device features multiple channels, each equipped with its own electronic valve output for controlling thermoelectric valve drives (e.g., TSA/K) operating at 24...230 V AC. The outputs are protected against short circuits and overload. Control of the valve outputs can be achieved through either an internal or an external room temperature controller. Push buttons are located at the front of the device to control the outputs, e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
6-fold	4	VC/S 6.2.2.2	2CDG110330R0011			1
12-fold	8	VC/S 12.2.2.2	2CDG110331R0011			1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning



VAA/A 6.24.2

Floor heating Controller, 6-fold, SM

For the control of up to twelve thermoelectric 24 V DC or analog 0-10 V valve drives (two per channel). With integrated power supply for the valve drives. The device has an integrated relay output to switch the heating circuit pump in dependence of the control value of the valve outputs. The valve outputs can be controlled by the internal or an external room temperature controller. The device is suitable for the installation in the (floor) heating distribution system.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	VAA/A 6.24.2	2CDG120061R0011		0.5	1



ER/U 1.1

Electronic Relay, 1-fold, FM

To be discontinued

The device is used in combination with the universal interface US/U 12.2 and a room thermostat to control the temperature in individual rooms. The thermal valve drives of the radiator valves are operated both noise-free and with a low rate of wear.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	ER/U 1.1	GHQ6310044R0111		0.08	1
12-fold	–	US/U 12.2	2CDG110065R0011		0.06	1



ST/K 1.2

Electromotor Valve Drive

The Electromotor Valve Drive KNX ST/K 1.2 provides precise control for heating and cooling valves, ensuring secure communication through KNX Data Secure. It is equipped with an integrated temperature sensor and an integrated room temperature controller. It delivers a high actuating force of up to 220 N and a maximum valve stroke of 8 mm. It features 2 universal binary inputs, supporting connection options such as window contacts, presence detectors, and push-buttons. The second input also supports external temperature sensors. Additionally, the drive includes automatic valve adaptation and is compatible with a wide range of valve adapters, making it universally applicable. 2 adapters for the most common valves (M30x1.5 and Danfoss RA -VA 10 & VA 100-) are supplied.

The Bus Coupler is integrated. The device can be used in the heating circuit distributor. The actual valve position can be indicated by 5 LEDs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	ST/K 1.2	2CDG120092R0011		0.02	1



TSA/K 230.2

Thermoelectric Valve Drives

For opening and closing valves in heating, ventilation and air-conditioning systems.

Both variants (230 V and 24 V) feature a plug-in connection cable (1 m) and a splash-proof housing. The mounting on the valve is easily implemented using the Valve Adapter VA/Z xx.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
230 V	–	TSA/K 230.2	2CDG120049R0011		0.16	1
24 V	–	TSA/K 24.2	2CDG120050R0011		0.16	1
Valve Adapter for valves from Dumser, Chronatherm, Vescal, KaMo	–	VA/Z 10.1	2CDG120009R0011		0.06	1
Valve Adapter for valves from Honeywell, Reich, Cazzaniga, Landis & Gyr, MNG	–	VA/Z 50.1	2CDG120010R0011		0.05	1
Valve Adapter for valves from Danfoss RA	–	VA/Z 78.1	2CDG120011R0011		0.03	1
Valve Adapter for valves from Heimeier, Herb, Onda, Schlösser (ab 93), Oventrop	–	VA/Z 80.1	2CDG120012R0011		0.06	1



SUG/U 1.1

Split Unit Gateway, FM

The Split Unit Gateway forms the interface between the KNX system and many manufacturers' air conditioners, so-called split units. The device converts the KNX telegrams into infrared commands and transmits them to the split unit. The transmitter of the supplied cable is bonded directly onto the split unit's receiver. The split unit then no longer receives the commands from a remote control. Instead, it can be operated via any KNX sensors or via a visual display system. The device is put into operation with the ETS, and a free ETS app is available to select the split unit model. Auxiliary voltage is not required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SUG/U 1.1	2CDG110207R0011		0.02	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

Fan Coil Controller					
	FCC/S 1.1.1.1	FCC/S 1.1.2.1	FCC/S 1.2.1.1	FCC/S 1.2.2.1	FCC/S 1.3.1.1
General					
Supply voltage	KNX	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	6	6	6	6	6
Current consumption, bus	< 12 mA	< 12 mA	< 12 mA	< 12 mA	< 12 mA
Manual operation	–	■	–	■	–
Software functionality					
Integrated room temperature controller (RTC)	■	■	■	■	■
Use in Master/Slave System with room operation units	■	■	■	■	■
Fan outputs					
Number of fans	1	1	1	1	1
Fan type:					
1/2/3 step	■	■	■	■	–
Rated current I _n	5 A	5 A	5 A	5 A	–
Rated voltage U _n (50/60 Hz)	250 V AC	250 V AC	250 V AC	250 V AC	–
Continues Fan (0 ... 10 V)	–	–	–	–	■
Valve outputs					
Electronic 0,5 A	2	2	–	–	–
Analog 0...10 V	–	–	2	2	2
Control individual	■	■	■	■	■
Supported valve types:					
– Thermoelectric valve drive (PWM)	2	2	–	–	–
– Motor-driven valve drive (3-point)	1	1	–	–	–
– Analog valve drive or	–	–	2	2	2
– 6-way valve drive	–	–	1	1	1
Switching contact					
Number of contacts	1	1	1	1	1
Rated current I _n	16 A	16 A	16 A	16 A	16 A
Rated voltage U _n (50/60 Hz)	250 V AC	250 V AC	250 V AC	250 V AC	250 V AC
Inputs					
Number of inputs	4	4	4	4	4
Supported sensors:					
– Temperature sensor	■	■	■	■	■
– Dew Point sensor	■	■	■	■	■
– Level sensor	■	■	■	■	■
– Binary signal input	■	■	■	■	■
– Analog room control unit (SAR/A or SAF/A)	1	1	1	1	1
Fan Coil Unit type					
2 pipe					
Heating	■	■	■	■	■
Cooling	■	■	■	■	■
Heating/Cooling	■	■	■	■	■
4 pipe					
Heating/Cooling	■	■	■	■	■
Commissioning and diagnostic function					
Control and diagnosis via ABB i-bus® Tool	■	■	■	■	■

■ = Function is supported

– = Function is not supported

> Table of contents

Fan Coil Controller				
	FCC/S 1.3.2.1	FCC/S 1.4.1.1	FCC/S 1.5.1.1	FCC/S 1.5.2.1
General				
Supply voltage	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	6	6	6	6
Current consumption, bus	< 12 mA	< 12 mA	< 12 mA	< 12 mA
Manual operation	■	–	–	■
Software functionality				
Integrated room temperature controller (RTC)	■	■	■	■
Use in Master/Slave System with room operation units	■	■	■	■
Fan outputs				
Number of fans	1	1	1	1
Fan type:				
1/2/3 step	–	■	–	–
Rated current I _n	–	5 A	–	–
Rated voltage U _n (50/60 Hz)	–	250 V AC	–	–
Continues Fan (0 ... 10 V)	■	–	■	■
Valve outputs				
Electronic 0,5 A	–	1	2	2
Analog 0...10 V	2	–	–	–
Control individual	■	■	■	■
Supported valve types:				
– Thermoelectric valve drive (PWM)	–	1	2	2
– Motor-driven valve drive (3-point)	–	–	1	1
– Analog valve drive or	2	–	–	–
– 6-way valve drive	1	–	–	–
Switching contact				
Number of contacts	1	–	1	1
Rated current I _n	16 A	–	16 A	16 A
Rated voltage U _n (50/60 Hz)	250 V AC	–	250 V AC	250 V AC
Inputs				
Number of inputs	4	4	4	4
Supported sensors:				
– Temperature sensor	■	■	■	■
– Dew Point sensor	■	■	■	■
– Level sensor	■	■	■	■
– Binary signal input	■	■	■	■
– Analog room control unit (SAR/A or SAF/A)	1	1	1	1
Fan Coil Unit type				
2 pipe				
Heating	■	■	■	■
Cooling	■	■	■	■
Heating/Cooling	■	■	■	■
4 pipe				
Heating/Cooling	■	–	■	■
Commissioning and diagnostic function				
Control and diagnosis via ABB i-bus® Tool	■	■	■	■

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

	Blower Actuators	
	FCL/S 1.6.1.1	FCL/S 2.6.1.1
General		
Supply voltage	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail
Module width (18 mm)	4	6
Current consumption, bus	< 12 mA	< 12 mA
Manual operation	–	–
Fan outputs		
Number of fans	1	2*
Supported fan types:		
– 1/2/3 step or	■	■
– 3 individual contacts	–	–
Rated current I _n	6 A	6 A
Rated voltage U _n	250/440 V AC (50/60 Hz)	250/440 V AC (50/60 Hz)
Valve outputs		
Electronic 0.5 A	–	–
Analog 0...10 V	–	–
Control individual	–	–
Supported valve types:		
– Thermoelectric valve drive (PWM)	–	–
– Motor-driven valve drive (3-point)	–	–
– Analog valve drive	–	–
Valve type can be mixed	–	–
Switching contact		
Number of contacts	1	2 (5)*
Rated current I _n	6 A	6 A
Rated voltage U _n	250/440 V AC (50/60 Hz)	250/440 V AC (50/60 Hz)
Inputs		
Number of inputs	–	–
Supported sensors:		
– Switch sensor	–	–
– Value/forced operation	–	–
– Temperature sensor	–	–
Fan Coil Unit type		
2 pipe		
Heating	–	–
Cooling	–	–
Heating/Cooling	–	–
4 pipe		
Heating/Cooling	–	–
Various		
Parallel operation	–	–
Commissioning and diagnostic function		
Control and diagnosis via ABB i-bus® Tool	–	–

■ = Function is supported

– = Function is not supported

* = Second fan output can be used as 3 switch outputs



FCC/S 1.1.1.1

Fan Coil Controller, 2 x PWM, 3-stage, MDRC

For the control of fan coil units. Via two electronic outputs, two thermoelectric or one motor-driven valve drive can be controlled for heating and cooling. For the fan control the device features three relay outputs. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device.

The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The FCC/S 1.1.2.1 features an easy to use manual operation.

Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.1.1.1	2CDG110210R0011		0.28	1
Manual Operation	6	FCC/S 1.1.2.1	2CDG110211R0011		0.285	1



FCC/S 1.2.2.1

Fan Coil Controller, 2 x 0-10 V, 3-stage, MDRC

For the control of fan coil units. Via two analog outputs, two analog valves or one 6-way valve drive can be controlled for heating and cooling. For the fan control the device features three relay outputs. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The FCC/S 1.2.2.1 features an easy to use manual operation.

Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.2.1.1	2CDG110212R0011		0.23	1
Manual Operation	6	FCC/S 1.2.2.1	2CDG110213R0011		0.235	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning



FCC/S 1.3.1.1

Fan Coil Controller, 3 x 0-10 V, MDRC

For the control of fan coil units. Via two analog outputs, two analog valves or one 6-way valve drive can be controlled for heating and cooling. For the fan control the device features an analog output for the control of a continuous fan. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The FCC/S 1.3.2.1 features an easy to use manual operation.

Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.3.1.1	2CDG110214R0011		0.21	1
Manual Operation	6	FCC/S 1.3.2.1	2CDG110215R0011		0.215	1



FCC/S 1.4.1.1

Fan Coil Controller, PWM, 3-stage, MDRC

For the control of fan coil units. Via one electronic output, a thermoelectric valve drive can be controlled for heating and cooling. For the fan control the device features three relay outputs. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device.

The device supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.4.1.1	2CDG110209R0011		0.215	1



FCC/S 1.5.2.1

Fan Coil Controller, 2 x PWM, 0-10 V, MDRC

For the control of fan coil units. Via two electronic outputs, two thermoelectric or one motor-driven valve drive can be controlled for heating and cooling. For the fan control the device features an analog output for the control of a continues fan. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The FCC/S 1.5.2.1 features an easy to use manual operation.

Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.5.1.1	2CDG110234R0011		0.21	1
Manual Operation	6	FCC/S 1.5.2.1	2CDG110235R0011		0.215	1



CAR/U 4.1.1.1-71

Room Temperature Controller Fan Coil, 2/4 pipe, On/Off, FM

ABB Caldion® Room Temperature Controller for fan coil units with 2 pipe, 2 pipe with electric heater or 4 pipe system, Flush Mounted, BS standard. Available for standalone function or as KNX device with integrated bus coupling unit. Build in temperature sensor, 2 x binary input for window, dewpoint, condensate alarm. Integrated actuator output control for on/off valve and 3 x fan speed control. Dedicated capacitive touch RTC control button for intuitive control, mode operation and frameless design with large display.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	CAR/U 4.1.1.1-71	2TAZ740010R2001		0.272	1
white	–	CAR/U 4.1.1.1-84	2TAZ740010R0001		0.272	1



CAR/U 4.2.1.1-71

Room Temperature Controller Fan Coil, 2/4 pipe, 0-10V, FM

ABB Caldion® Room Temperature Controller for fan coil units with 2 pipe, 2 pipe with electric heater or 4 pipe system, Flush Mounted, BS standard. Available for standalone function or as KNX device with integrated bus coupling unit. Build in temperature sensor, 2 x binary input for window, dewpoint, condensate alarm. Integrated actuator output control for 0-10V valve and 3 x fan speed control. Dedicated capacitive touch RTC control button for intuitive control, mode operation and frameless design with large display.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	CAR/U 4.2.1.1-71	2TAZ741010R2001		0.272	1
white	–	CAR/U 4.2.1.1-84	2TAZ741010R0001		0.272	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning



FCL/S 2.6.1.1

Blower Actuator, 6 A, MDRC

Controls one blower or fan with up to three fan speeds via step or changeover control. Furthermore a additional equipment like a damper or valve can be switched by one floating output. The fan speed can be directly chosen, increased and decreased as well as controlled by the control value of a external closed-loop controller.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold	4	FCL/S 1.6.1.1	2CDG110163R0011		0.18	1
2-fold	6	FCL/S 2.6.1.1	2CDG110164R0011		0.26	1



SAF/A 1.0.1-24

Room Temperature and Fan Coil Control Element, SM

The control element is used in conjunction with the FCC/S Fan Coil Controller or the VC/S Valve Controller for temperature adjustment, measurement and fan speed adjustment.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAF/A 1.0.1-24	2CKA006134A0348			1



SAR/A 1.0.1-24

Room Temperature Control Element, SM

The control element is used in conjunction with the FCC/S Fan Coil Controller or the VC/S Valve Controller for temperature adjustment and measurement.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAR/A 1.0.1-24	2CKA006134A0346			1



6138/11-84-500

Room Thermostat Fan Coil with Display, SM

Sends control values for the room to the Fan Coil Actuators or devices with the respective outputs (e.g. Room Master). The intuitive control operation allows each user to individually set the room temperature and the fan speed. The large LC display can display the actual and target temperatures, the current operating mode as well as the fan speeds. With integrated Bus Coupler.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
aluminium silver	–	6138/11-83-500	2CKA006138A0005		0.092	1
davos/studio white	–	6138/11-84-500	2CKA006138A0003		0.092	1



LGS/A 1.2

Air Quality Sensor with Room Temperature Controller, SM

For the control and measuring of the room air quality and temperature. Accurately measures the CO₂ concentration (390...10.000 ppm), humidity (0...100 %) and temperature (0...+50 °C) in a room and sends the values on the bus. By using the integrated thresholds the measured values can be monitored. With the integrated controller it is possible to control the room temperature and HVAC actuators. With integrated Bus Coupler.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LGS/A 1.2	2CDG120059R0011		0.06	1



AC/S 1.1.1

Application Controller, MDRC

The AC/S Application Controller has predefined Automation Modules for a holistic HVAC Automation Solution from Central HVAC to Room Automation. For example Schedule, Set Point Calculation, Heat Curve Calculation, Data Logging and Device Monitoring. Furthermore own Automation Modules can be created by a graphical Logic Editor. By a web based User Interface the whole system can be monitored and managed.

The AC/S 1.2.1 has additional a built in bidirectional KNX-BACnet/IP Gateway (Server) for data exchange with superordinate Building Management Systems.

The Engineering is done completely by the ETS. An additional external Software is not required. The device has a KNX TP port.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Basic	4	AC/S 1.1.1	2CDG110205R0011		0.19	1
BACnet	4	AC/S 1.2.1	2CDG110206R0011		0.19	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

	Heating/Cooling Circuit Controller HCC/S 2.1.x.1	Heating/Cooling Circuit Controller HCC/S 2.2.x.1
General		
Supply voltage	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail
Module width (17.5 mm)	8	8
Number of channels	2	2
Outputs		
3- way mixing valve control type	0 ... 10 V DC	3 – Point
Valve outputs per channel	1	1
Pump control output per channel	1 (5 A)	1 (5 A)
Inputs		
Input for flow temperature measurement per channel	1	1
Input for return flow temperature measurement per channel	1	1
Inputs for pump status monitoring (pump status, pump failure, pump repair mode) per channel	3	3
Manual operation		
Manual operation	HCC/S 2.1.2.1	HCC/S 2.2.2.1
Software functionality		
Integrated temperature controller for heating or cooling distribution circuits	■	■
Forced operation	■	■
Cyclical monitoring of input values	■	■
Flow temperature limitation	■	■
Safety shutdown temperature	■	■
Manual valve overwrite	■	■
Valve purge	■	■
Manual pump overwrite	■	■
Pump control in dependence of control value	■	■
Channel bundling for double pump systems	■	■

■ = Function is supported

– = Function is not supported



HCC/S 2.1.2.1

Heating/Cooling Circuit Controller, 2-fold, 0-10 V, MDRC**To be discontinued**

For the control of heating or cooling circuits. The device has 2 channels, each with an analog output to control the mixing valve (0...10 V) of a heating or cooling circuit as well as a relay output (5 A) to switch the pump of the circuit. Via 3 binary inputs it is possible to monitor the status of the pump (via potential free contacts) and integrate these feedback into the control of the pump. The flow and return flow temperature are measured and used for the calculation of the control value for the valve output in the integrated controller. The set point temperature is received via the KNX bus. By bundling both channels of the device it is also possible to use it for double pump systems.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	HCC/S 2.1.1.1	2CDG110218R0011		0.28	1
Manual Operation	6	HCC/S 2.1.2.1	2CDG110219R0011		0.285	1



HCC/S 2.2.1.1

Heating/Cooling Circuit Controller, 2-fold, 3-point, MDRC**To be discontinued**

For the control of heating or cooling circuits. The device has 2 channels, each with two electronic outputs to control a motor-driven mixing valve (3-Point) of a heating or cooling circuit as well as a relay output (5 A) to switch the pump of the circuit. Via 3 binary inputs it is possible to monitor the status of the pump (via potential free contacts) and integrate these feedback into the control of the pump. The flow and return flow temperature are measured and used for the calculation of the control value for the valve output in the integrated controller. The set point temperature is received via the KNX bus. By bundling both channels of the device it is also possible to use it for double pump systems.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	HCC/S 2.2.1.1	2CDG110220R0011		0.285	1
Manual Operation	6	HCC/S 2.2.2.1	2CDG110221R0011		0.29	1



MPG/S 8.1.1

KNX/MP-Bus Controller, MDRC**NEW**

The KNX/MP-Bus Controller allows the integration of Belimo MP-Bus devices into the KNX bus. Depending on the type of the MP-Bus devices connected to the controller up to 8 or up to 16 MP-Bus devices can be connected. The addressing of the MP-Bus devices can be done via a free-of-charge DCA or as well via the known Belimo tools. The device allows the easy control and displaying of all relevant data points of the MP-Bus devices, such as control value, forced override, relative position, actual position etc. as well as the sensor integration of the MP-Bus devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	MPG/S 8.1.1	2CDG110311R0011		0.11	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning



BCI/S 1.1.1

Boiler/Chiller Interface, 1-fold, MDRC

As interface between the KNX system and a heat generator or chiller. Via an analog output (0...10 V) the set point or set point adjustment temperature can be transmitted to the heat generator/chiller. The set point itself is received via KNX. Via two binary inputs the device can monitor the status of the heat generator/chiller (via potential free contacts) and send it on the KNX bus. A relay output (5 A) is included to switch or enable/disable the heat generator/chiller. With an additional relay output (5 A) the pump of the heat generator/chiller can be switched on and off. Via 3 binary inputs it is possible to monitor the status of the pump (via potential free contacts) and integrate these feedback into the control of the pump. The device supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	BCI/S 1.1.1	2CDG110222R0011		0.21	1



PM5630-2ETH

AC500 Programmable Logic Controller PM5630

Powerful freely programmable KNX Building Automation Controller with flexible expandable In- and Output Modules. Automation programs based on the globally standardized IEC 61131 programming languages can be executed. Both the graphical and textual programming languages are supported. The programming software ABB Automation Builder based on the established Codesys software enables the easy creation and reuse of automation programs as well as the integration of software libraries. The ABB Automation Builder is integrated with the ETS through an ETS app.

Up to 1000 KNX group objects can be used in the automation program. The KNX relevant settings such as physical address, linking of the controller group objects with group addresses and the KNX sending conditions are set in the ETS and can also be changed at any time without ABB Automation Builder.

The building automation controller has two Ethernet network interfaces. The use is flexible adjustable. In addition to KNXnet/IP communication, these can also be used for other protocols and functions. Among other things, for Modbus TCP and a web server with a freely customizable web interface for display and operation of the system.

The controller has a built-in display, an RS-232/485 interface for i. a. Modbus. The internal clock and data variables can be buffered by a battery. The internal memory of 8 MB can be extended by the memory card slot.

For a complete product the CPU module PM5630-2ETH as well as the Terminal Base TB5600-2ETH are required. To be able to connect the PLC with KNX the KNX Runtime License is required additionally.



TB5600-2ETH

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
AC500 Programmable Logic Controller PM5630	–	PM5630-2ETH	1SAP131000R0278		0.16	1
AC500 Terminal Base TB5600-2ETH		TB5600-2ETH	1SAP110300R0278		0.20	1
AC500 V3 KNX IP Runtime License		PS5604-KNX	1SAP195800R0101		0.01	1



DM200-TOOL

License Automation Builder

License for the engineering software Automation Builder for AC500 PLCs:

This license is valid for a single computer and allows the programming of any number of AC500 PLCs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	DM200-TOOL	1SAS010000R0102		0.01	1



DI572

Digital Input Module, 16 DI 240 V AC

Extension module for the AC500 PLC with 16 digital inputs for 100 – 240 V AC. Connection of the cables via pluggable spring terminals.

Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Input Module, 16 DI 240 V AC	–	DI572	1SAP230500R0000		0.14	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6



DC562

Digital Input/Output Module 16DC: 24 V DC/0.5 A

Extension module for the AC500 PLC with 16 switchable digital inputs or outputs for 24 V DC. The electronic transistor outputs switch 0.5 A. Connection of the cables via pluggable spring terminals.

Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Input/Output Module 16DC: 24 V DC/0.5 A	–	DC562	1SAP231900R0000		0.22	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning



DX571

Digital Input/Output Module, 8 Digital Inputs/8 Digital Outputs - Relay

Extension module for the AC500 PLC with 8 digital inputs and 8 digital outputs. The digital inputs process 24 V DC signals. The relay outputs switch a maximum of 2 A at 24 V DC and a maximum of 1.5 A at 120/240 V AC. Connection of the cables via pluggable spring terminals. Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Input/Output Module, 8 Digital Inputs/8 Digital Outputs - Relay	–	DX571	1TNE968902R2302		0.24	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6



DO572

Digital Output Module, 8 Digital Outputs, Triac, 0.3 A

Extension module for the BAC/S Building Automation Controller KNX with 8 digital outputs. The digital triac outputs switch a maximum of 0.3 A at 120/240 V AC. Connection of the cables via pluggable spring terminals. Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Output Module, 8 Digital Outputs, Triac, 0.3 A	–	DO572	1TNE968902R2203		0.16	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6



AX561

Analog Input/Output Module, 4 Analog Inputs/2 Analog Outputs U/I

Extension module for the BAC/S Building Automation Controller KNX with 4 analog inputs and 2 analog outputs. The inputs and outputs support voltage signals from 0 V ... + 10 V, 0 V ... + 5 V, - 2.5 V ... + 2.5 V and -5 V ... + 5 V as well as current signals of 0 mA ... 20 mA and 4 mA ... 20 mA. Connection of the cables via pluggable spring terminals. Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Analog Input/Output Module, 4 Analog Inputs/2 Analog Outputs U/I	–	AX561	1TNE968902R1301		0.23	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6



AI562

Analog Input Module, 2 Analog Inputs

Extension module for the BAC/S Building Automation Controller KNX with 2 analog inputs for temperature sensors. Temperature sensors of type Pt100, Pt1000, Ni100, Ni1000 and 150 Ohm, 300 Ohm are supported. Connection of the cables via pluggable spring terminals. Terminals (11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
				€	kg	pc.
Analog Input Module, 2 Analog Inputs	–	AI562	1TNE968902R1102		0.22	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6

ABB i-bus® KNX

Automation, Logic and Time Control

	Logic Module LM/S 1.1	Application Unit, Logic ABL/S 2.1	Application Unit, Time ABZ/S 2.1	Logic Controller ABA/S 1.2.1
General				
Supply voltage	KNX	KNX	KNX	24 V DC/PoE
Ethernet connection	–	–	–	■
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	2	2	2	4
Software function				
Logic gates	■	■	–	■
Gate/filter	■	■	–	■
Multiplexer	–	–	–	■
Flip Flop	–	–	–	■
PID Controller	–	–	–	■
Composite function blocks	–	–	–	■
Time delay	■	■	–	■
Staircase lighting/Pulse duration	■	■	–	■
Calculation	□	–	–	■
Min./Max.	■	■	–	■
Comparator/Threshold	■	■	–	■
Format converter	■	–	–	■
Counter	■	–	–	■
Calendar switch program	–	–	■	■
Day routines	–	–	■	■
Week routines	–	–	■	■
Year routines	–	–	■	■
Special days	–	–	■	–
Daylight saving times	–	–	■	–
Telegram multiplier	■	–	■	■
Simulation (offline)	–	–	–	■
Webserver	–	–	–	■
Programming via KNX	■	■	■	■
Programming via Ethernet	–	–	–	■
Max. number of function elements	3	140	30	3000
Monitoring (online)	–	–	–	■

- = Function is supported
 – = Function is not supported
 □ = Limited functions



LM/S 1.1

Logic Module, MDRC

Used to solve a varied range of project-specific control tasks and can implement 3 functions simultaneously. The following functions are available for selection: logic gate, filter, time delay, multiplier, min/max value detector, temperature comparator, toggle values, threshold detection, format converter, scenes, increment/decrement values, staircase lighting.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	LM/S 1.1	GHQ6310080R0111		0.1	1



ABL/S 2.1

Application Unit Logic, MDRC

Allows the compilation of complex logical functions by simply combining different logic elements and gates using a graphical user interface as an ETS plug-in and does not require additional software. 50 logical elements, 50 gates, 30 timer modules and 10 comparators are available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	ABL/S 2.1	2CDG110073R0011		0.12	1



ABZ/S 2.1

Application Unit Time, MDRC

It provides a yearly time clock program with 15 daily routines (800 switching events), a weekly schedule and allowance for 100 special days. Additionally, the unit can control up to 300 participants in 30 macro groups, that can be triggered using a single command. In this way, each time controlled switching event can cause a series of actions. The switching times can be modified with the free PZM software without using ETS. PZM Software and additional information on www.abb.com/knx.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	ABZ/S 2.1	2CDG110072R0011		0.12	1



ABA/S 1.2.1

Logic Controller, MDRC

The device provides extensive logic functions. The logic is defined via a graphic editor integrated in the ETS. Up to 3000 logic gates are possible.

The generated logic can be tested by a simulation function. User-defined function blocks can be created and saved for taking them over into other projects.

The device requires an auxiliary voltage, either 24 V DC or Power over Ethernet (PoE).

If timer functions are used the date and time has to be provided via KNX/TP.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	ABA/S 1.2.1	2CDG110192R0011		0.192	1

ABB i-bus® KNX

Automation, Logic and Time Control



FW/S 8.2.1

Radio Time Switch, 8 Channels, MDRC

The Radio Time Switch sends current time and date on the bus. The time can be optionally received via a DCF or GPS antenna. Furthermore the device can be used to easily adjust the time programs.

The device provides 8 channels. Every channel supplies an independent daily, time and/or yearly program. Additionally, special programs (e.g. for vacation or public holiday days) are possible.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	3	FW/S 8.2.1	2CDG120039R0011		0.33	1



FAD/A 1.1

DCF Antenna for Radio Time Switch, SM

For the connection to the Radio Time Switch FW/S 8.2.1. The time signal from the DCF 77 transmitter can be received within a radius of approx. 1.000 km around Frankfurt.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	FAD/A 1.1	2CDG120040R0011		0.17	1



FAG/A 1.2

GPS Antenna for Radio Time Switch, SM

For the connection to the Radio Time Switch FW/S 8.2.1. The device receives time and date via GPS signal which is available worldwide.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	FAG/A 1.2	2CDG120070R0011		0.09	1



PS/E 2.2

Programming Set OBELISK top2 for Radio Time Switch

The programming set contains a memory card PK/E 2.1 for transferring switching programs to the Radio Time Switch and a USB programming adapter for the memory card. The newest version of the software Obelisk top2 for the creation of switching programs for the Radio Time Switch FW/S 8.2.1 can be downloaded on our website.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	PS/E 2.2	2CDG120071R0011		0.20	1



PK/E 2.1

Memory Card OBELISK top2 for Radio Time Switch

The memory card can be used for transferring switching programs to Radio Time Switch.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	PK/E 2.1	2CDG120043R0011		0.02	1

ABB RoomTouch®

As individual as your home



ABB RoomTouch® 4"


- 12 control elements
- KNX Data Secure
- Up to 12 status information can be shown (e.g. fault/alarm messages)
- Haptic feedback (vibration)
- Integrated proximity and brightness sensor and room temperature controller
- Anti-glare mode for use in dark, complementing the day and night mode
- Flexible visualization (1-4 functions per page)
- Integrated binary input and external temperature sensor input
- Commissioning via ETS5/6 and DCA tool

ABB RoomTouch® 5"

- Up to 30 control elements
- Separate fault and alarm messages
- Up to 20 status information can be shown (e.g. fault/alarm messages)
- Acoustic and haptic feedback
- Integrated proximity and brightness sensor and room temperature controller
- Anti-glare mode for use in dark, complementing the day and night mode
- Flexible visualization (1-5 functions per page)
- Integrated binary input and external temperature sensor input
- Metal frame and glass display
- Commissioning via ETS5/6 and DCA tool

ABB i-bus® KNX

Visualisation, Display and Signalling



RT/U12.86.1-825



RT/U12.86.1-811

ABB RoomTouch® 4", FM

Freely programmable Touch panel up to 12-fold featuring a 4-inch IPS screen with 480*480 resolution that offers home control and monitoring of the free@home, or KNX system.

Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The devices support KNX Data Secure.

KNX and free@home functions:

- 12 control elements are displayed on a maximum of 12 pages
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function 18 fault and alarm messages
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T).

External power supply needed: 20-32 V DC (SELV)

Number of bus subscribers: 1

Optional Removal protection: TZE/U.0.xx.CK

Display size: 10.16 cm (4")

Display resolution: 420*420

Display screen: IPS display

Dimensions (L x W x D): 86 mm x 86 mm x 11 mm

Display surface: glass black (-825), glass white (-811)

Frame color: black matt (-885), white matt (-884)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
glass black	–	RT/U12.86.1-825	2TMA310011B0003	€	kg	pc.
white glass	–	RT/U12.86.1-811	2TMA310011W0001			

ABB i-bus® KNX

Visualisation, Display and Signalling



RT/U 30.0.1-811

ABB RoomTouch® 5", FM

Freely programmable KNX touch display as a control, notification and operation center for your room. For the display and operation of the following KNX standard functions: switching, dimming, slider, blind, RGBW LED control, step switch, RTC, scene switch, display element, audio control and Split Unit control. With scene and logic functions and time programs.

Displays alerts and malfunctions. Programmable with up to max 30 functions.

External power supply: 20 – 32 V DC (SELV). The freely programmable touch display (5") comes with a HD resolution of 720 x 1280 and a view angle of 160°.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white glass	–	RT/U 30.0.1-811	2TMA200050W0007		0.24	1
black glass	–	RT/U 30.0.1-825	2TMA200050B0005		0.24	1



BOX/U 5.1

ABB RoomTouch® Installation Box, FM

For flush mounting and hollow wall panel mounting of the ABB RoomTouch® 5"

RT/U30.0.1-8xx. Windproof.

Dimensions flush mounting (H x W x D): 121 mm x 58 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Box	–	BOX/U 5.1	2TMA200160B0003		0.10	1

ABB IQTouch 7"/10"



Smart Building Control Panel

Main Dashboard Features

- Large clock and date display with gradient design
- Real-time environmental monitoring (temperature, humidity)
- Quick access to devices and controls
- Music control integration
- Scene activation buttons with images
- Online weather information

Available Themes

- Light theme - Clean white background
- Dark theme - Modern black interface

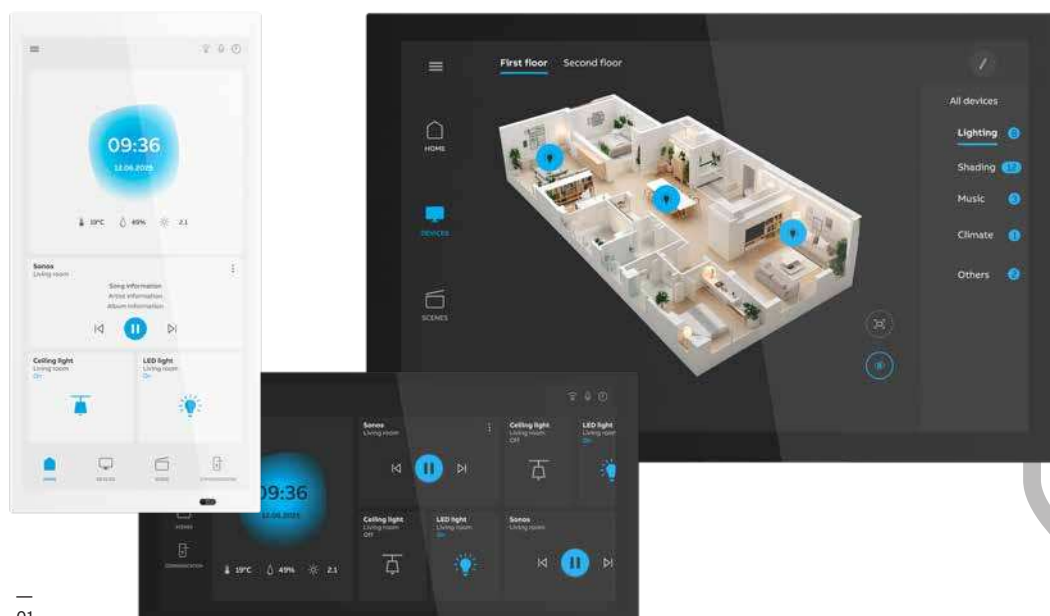

01

Modern Touch Panel

for Complete Building Control:

- 6.9-inch capacitive touchscreen (1440×720 pixels) or 10.1-inch capacitive touchscreen (1280×800 pixels)
- KNX display and control elements: lighting, blinds, HVAC, scenes, Audio, air quality display elements, energy display element
- Environmental sensors: temperature, humidity, brightness sensor and proximity sensor
- SIP intercom capability for door communication
- Floorplan visualization with device control
- Secure: KNX Data Secure protocol

Specifications:

- Display: Anti-fingerprint coating
- 6.9": Vertical and horizontal orientation
- 10.1": Horizontal orientation only
- Connectivity & Power:
 - KNX TP (Twisted Pair)
 - Wi-Fi and RJ45 Ethernet
 - Auxiliary power: 12 – 30 V DC
 - Power consumption:
 - 6.9": < 280 mA @ 24V (< 7W),
 - 10.1": < 320 mA @ 24V (< 8W)

01 ABB IQTouch 7"
black and white glass,
ABB IQTouch 10"
black glass

ABB i-bus® KNX

Visualisation, Display and Signalling



TP/U7.1.1-825

ABB IQTouch 7"

NEW

Freely programmable Touch panel featuring a 7-inch IPS screen with 1440*720 resolution that combines smart home automation and SIP door communication in one device for residential applications, hotels, and commercial buildings. IQTouch 7 offers home control and monitoring of the KNX system and can be combined with ABB Welcome® IP.

Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Ventilation - RTC control element - Scene switch - Energy Display element - Air quality display - Audio control element. With scene function, logic functions and time programs. IQTouch 7" can also be used as an end device for communication with the ABB-Welcome IP outdoor stations, and internal communication between different panels.

Functions KNX:

- A total of 120 control elements are displayed on a maximum of 12 pages.
- 24 fault and alarm messages
- 8 logic functions
- 16 timers
- 8 scenes
- Page display with a maximum of 50 touch surfaces on one page
- 30 floorplan pictures

Door communication:

- Welcome IP via SmartAP
- Standard SIP
- Possibility of integrating RTSP IP cameras

External power supply: 20-32 VDC (SELV).

Display size: 17.5cm (6.9"): Display resolution: 1440*720: Display screen: IPS display

Dimensions (L x W x D): 172 mm x 86 mm x 36 mm

Flush mounted in standard VDE, BS or CH flush mounting box

The flat design slim frame sits almost flush with the wall (11.8 mm) and is available in 2 colors: black or white glass.

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
black glass	–	TP/U7.1.1-825	2CDG120097R0011		0.4	1
white glass	–	TP/U7.1.1-811	2CDG120098R0011		0.4	1



TP/U10.1.1-825

ABB IQTouch 10"**NEW**

Freely programmable Touch panel featuring a 10-inch IPS screen with 1280*800 resolution that combines smart home automation and SIP door communication in one device for residential applications, hotels, and commercial buildings. IQTouch 10 offers home control and monitoring of the KNX system and can be combined with ABB Welcome® IP.

Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Ventilation - RTC control element - Scene switch - Energy Display element - Air quality display - Audio control element. With scene function, logic functions and time programs. IQTouch 10" can also be used as an end device for communication with the ABB-Welcome IP outdoor stations, and internal communication between different panels.

Functions KNX:

- A total of 240 control elements are displayed on a maximum of 12 pages.
- 24 fault and alarm messages
- 8 logic functions
- 16 timers
- 64 scenes
- Page display with a maximum of 50 touch surfaces on one page
- 30 floorplan pictures

Door communication:

- Welcome IP via SmartAP
- Standard SIP
- Possibility of integrating RTSP IP cameras

External power supply: 20-32 VDC (SELV).

Display size: 25.7 cm (10.1"): Display resolution: 1440*720: Display screen: IPS display

Dimensions (L x W x D): 240 mm x 154.6 mm x 36 mm

Flush mounted in standard VDE, BS or CH flush mounting box

The flat design slim frame sits almost flush with the wall (11.8 mm) and is available in 2 colors: black or white glass.

Available October 2026

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
black glass	–	TP/U10.1.1-825	2CDG120099R0011		0.8	1
white glass	–	TP/U10.1.1-811	2CDG120100R0011		0.8	1

ABB i-bus® KNX

Visualisation, Display and Signalling



ST/U10.1.1-811

ABB SmartTouch® 10"

Freely programmable touch panel featuring a 10-inch IPS screen with 1280*800 resolution that combines smart home automation and door communication in one device for residential applications, hotels, and commercial buildings. ABB SmartTouch® 10" offers home control and monitoring of the ABB-free@home®, or ABB i-bus®KNX system and the fully integrated functions of ABB-Welcome.

Control, observe and manage your entire installation on one device: Switching – Dimming – Slider – Blind – RGBW control element – Step switch – Scene switch – Display element – Audio control element – RTC control element – VRV control element and display different values such as energy consumption and production. With scene function, logic functions, presence simulation and time programs. ABB SmartTouch® 10" can also be used as an end device for communication with the ABB-Welcome outdoor stations, and as part of the ABB-Welcome door communication system.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white/stainless	–	ST/U10.1.1-811	2TMA310051W0001		0.793	1
black/stainless	–	ST/U10.1.1-825	2TMA310051B0001		0.793	1
white/graphite	–	ST/U10.2.1-811	2TMA310051W0002		0.953	1
black/graphite	–	ST/U10.2.1-825	2TMA310051B0002		0.953	1
white/satin gold	–	ST/U10.3.1-811	2TMA310051W0003		0.953	1
black/satin gold	–	ST/U10.3.1-825	2TMA310051B0003		0.953	1
white/rose gold	–	ST/U10.4.1-811	2TMA310051W0004		0.953	1
black/rose gold	–	ST/U10.4.1-825	2TMA310051B0004		0.953	1



6136/07 UP-500

Busch-SmartTouch Installation Box, FM

For flush mounting and hollow panel mounting of the Busch-SmartTouch 10" ST/U10.x.1-8xx. Windproof.

Dimensions flush mounting (H x W x D): 152 mm x 235 mm x 60 mm.

Dimensions hollow wall (H x W x D): 146 mm x 227 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6136/07 UP-500	2CKA006136A0212		0.549	1




ST/A10.1-811

Surface Mounting Frame for SmartTouch® 10"

Surface mounting frame for mounting the ABB SmartTouch 10" ST/U10.x.1-8xx on:

- standard flush mounted wall box VDE & BS
- Already installed flush mounted installation box:
 - 6136/UP
 - 8136/01 UP-500
 - UP-KAST 2
- to be mounted directly on the wall
- to be mounted on the ABB-Welcome table stand

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	ST/A10.1-811	2TMA310161W0001		0.144	1
black	–	ST/A10.1-825	2TMA310161B0001		0.144	1



H8236-5W

IP touch 7 LAN/LAN

With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 16 control elements. Total 64 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 16 control elements. Total 64 control frames. Flush mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	H8236-5W	2TMA130050W0067		0.4875	1
black	–	H8236-5B	2TMA130050B0067		0.4875	1



H8236-4B

IP touch 7 LAN/Wifi

With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 16 control elements. Total 64 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 16 control elements. Total 64 control frames. Surface/flush/desktop mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	H8236-4W	2TMA130050W0065		0.4875	1
black	–	H8236-4B	2TMA130050B0065		0.4875	1

ABB i-bus® KNX


Visualisation, Display and Signalling



42361S-W-03



42361S-B-03



H8237-5W



H8237-4B

Surface-mounted box for IP touch 7

Mounting of IP touch 7" panel on the wall. For surface-mounted installation of indoor station. The product is packed with accessories to ensure qualified installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	42361S-W-03	2TMA130160W0021		0.210	1
black	–	42361S-B-03	2TMA130160B0089		0.210	1

IP touch 10 LAN/LAN


HD resolution display (1280x800px). With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 25 control elements. Total 100 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 25 control elements. Total 100 control frames. Flush mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - stainless steel end strip	–	H8237-5W	2TMA130050W0055		1.044	1
black - stainless steel end strip		H8237-5B	2TMA130050B0055		1.044	1


IP touch 10 LAN/Wifi

HD resolution display (1280x800px). With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 25 control elements. Total 100 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 25 control elements. Total 100 control frames. Surface/flush/desktop mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - stainless steel end strip	–	H8237-4W	2TMA130050W0054		1.044	1
black - stainless steel end strip		H8237-4B	2TMA130050B0054		1.044	1



42371S-W



42371S-B



42361F



53011PS

Surface-mounted box for IP touch 10

Mounting of IP touch 10 " panel on the wall. For surface-mounted installation of indoor station. The product is packed with accessories to ensure qualified installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	42371S-W	2TMA130161W0001		0.221	1
black	–	42371S-B	2TMA130161B0001		0.221	1

Flush-mounted box and Pre installation box for 7&10'' video indoor station.

The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back. The product is packed with accessories to ensure qualified installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	42361F	2TMA130160B0132		0.263	1

Plug-in power supply 24 V DC

Plug-in power supply 24 V DC.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	53011PS-03	2TMA130160W0029		0.13	1

KNX APP-Control Server

Smartphones, tablets and smartwatches or PCs turn into a practical remote control, thanks to the KNX APP-Control Server. It connects the KNX installation with the IP network and controls all KNX functions in the building.

New features:

- Smart Energy Management
- Remote programming and access
- Modbus TCP and BACnet IP integration
- KNX offline telegram recorder
- Userfriendly and modern UI

Device features worth mentioning:

- External access the the KNX system
- Easy creation of individual scenes
- Integrated weekly timer (with astro function)
- Integrated logic editor
- Recording and display of diagrams
- Sonos and Philips Hue connection
- Connection of IP cameras with MJPEG protocol possible
- Integrated rights and user management
- Alarm messages via e-mail and/or push notification


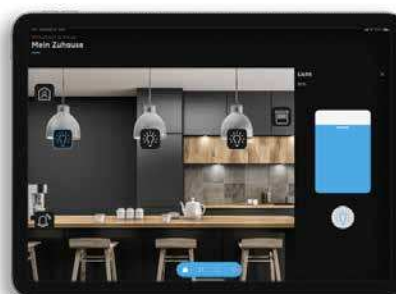


ABB i-bus® KNX

Visualisation, Display and Signalling

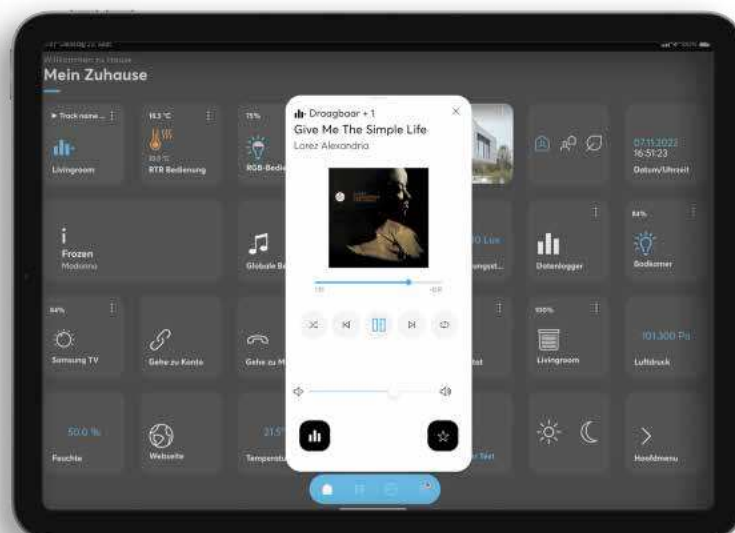

CT/S 2.1

KNX APP-Control Server, MDRC

A comprehensive visualization and control server for mobile devices (iOS and Android) and Windows computers. The APP-Control Server seamlessly combines KNX home automation with modern smart home ecosystems, enabling unified control and visualization of your complete installation with integrated energy management capabilities.

Key Features:

Complete KNX Visualization & Control

- Visualize and operate your entire KNX installation with unlimited flexibility
- Full control of all connected devices and functions without restrictions

Protocol & Building System Integration

- KNX Native Support: Direct integration with ABB i-bus® KNX systems
- BACnet Integration: Full BACnet/IP support for building automation and HVAC system integration
- Modbus Integration: Complete Modbus TCP support for industrial and building control devices
- Seamless bridging between multiple protocols for unified system management

Audio & Entertainment Integration

- Sonos Bridge: Complete integration of Sonos API with full control support (Works with Sonos)
- BlueOS Support: Full control of BlueOS-enabled audio devices including seamless multi-room audio management
- Audio alerts and notifications playable directly through Sonos

Advanced Smart Home Bridging

- Philips Hue Integration: Direct bridge between KNX and Philips Hue for advanced lighting control
- IP Camera Support: Full visualization with pan, tilt, and zoom functionality; snapshots can be attached to alarm notifications

Visualization & Control Functions

- Visualization Options: Dimmer, RGB(W) control, switch, blind/shutter, heating/cooling, air conditioning, scenes, button rows (max. 6), IP camera, status displays, value transmitters, Sonos control, and BlueOS control
- Design Options: List view and/or customizable background pictures with round, rectangle, or transparent controls
- Custom Layouts: Unrestricted personal profiles with unlimited page and control customization per user

Onboard Energy Management

- Integrated Energy Management: Real-time energy monitoring and analysis directly on the device
- Energy Edge EX.1 Integration: Advanced visualization of energy consumption and management data
- Statistics & Charts: Comprehensive statistics and charts with 5 period types (hour, day, week, month, year)
- Data Analysis: Monitor trends, identify consumption patterns, and optimize energy utilization across your entire installation

Automation & Intelligence

- Unlimited Time Programs & Scenes: Fully customizable and editable by end users
- Presence Simulation: Easy-to-use presence simulation with unlimited participant options
- Advanced Scripting: Flexible LUA-based Script Editor for complex logical functions
- Web Integration: Embed webpages for weather, traffic, custom information displays, or other data sources

Continued on the next page

ABB i-bus® KNX

Visualisation, Display and Signalling

Alarm & Notification Management

- Multi-Channel Alerts: Send alarm messages as email, push notifications (with IP camera snapshots), or audio alerts via Sonos systems
- Customizable Notifications: Configure alert routing based on severity and user preferences

Commissioning & Management

- Remote Commissioning: Complete online commissioning from anywhere – no need to visit customer sites
- Live Commissioning: Real-time configuration without service interruptions
- Offline Installation: Software can be loaded without internet connection
- Cloud Backups: Automatic backups including scenes, time programs, and presence simulation data
- Firmware & Software Updates: Continuous functional extensions and updates

Flexible Connectivity

- Direct KNX Interface: Native KNX connection for local control
- IP-Based Communication: Flexible IP interface for network-based bus communication
- Cloud Integration: Secured remote access via cloud solution (optional subscription)
- Multi-Protocol Support: Simultaneous management of KNX, BACnet, and Modbus systems

Security & Privacy

- Extensive security options protecting your installation and privacy
- All communication between app, installation, and cloud is encrypted using highest standards
- Username and password required for all communications
- End users can protect pages with PIN code, Touch ID, or Face ID
- Granular access rights with local user profiles for selective area access
- Device identity verification to prevent unauthorized access

Professional Installation

- Compatible with ABB i-bus® KNX, BACnet, and Modbus systems
- Complete web-based commissioning and local web interface for advanced configuration

Technical Specifications:

- Power Supply: 10-36 V DC (SELV)
- Bus Voltage: 24 V
- Protection Class: IP 20
- Operating Temperature: 0 °C to 70 °C
- Dimensions (L x W x D): 90 mm x 72 mm x 60 mm

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	CT/S 2.1	2CKA006136A0218		0.254	1

Busch-VoiceControl®

Control completely by voice

The building of the future recognises the needs of its users. It reacts individually – automatically and without being asked to do so.



01 Busch-VoiceControl®



01



- Approved solution for the systems Google Assistant, Amazon Alexa, Apple HomeKit
- Integration of lighting, heating and blind control systems
- All voice commands can be used simultaneously
- Control up to 150 functions
- HomeKit certification allows control of the KNX system from other HomeKit devices, such as the iPad, iPhone and Apple TV

ABB i-bus® KNX

Visualisation, Display and Signalling



VCO/S 150.2

Busch-VoiceControl® 2, MDRC

A certified Matter and voice control gateway for seamless integration of KNX home automation systems with modern smart home ecosystems. Busch-VoiceControl® now supports bidirectional Matter integration, enabling comprehensive interoperability between KNX and Matter-compatible devices.

Key Features:

Bidirectional KNX-Matter Integration

- KNX to Matter: Control KNX components remotely via Matter-compatible apps (Apple Home, Google Home, Amazon Alexa, Samsung SmartThings) with full status feedback
- Matter to KNX: Integrate Matter-enabled accessories (smart lights, blinds, locks, thermostats from brands like EVE) directly into your existing KNX system with real-time synchronization
- Supports up to 150 functions for comprehensive home automation control

Voice Control & Smart Home Integration

- Operate lighting, blinds, room temperature controllers, and other functions using simple voice commands or via the HomeKit app
- Works simultaneously with Apple HomeKit, Amazon Alexa, Google Home, and Samsung SmartThings
- Busch-VoiceControl® is an official certified HomeKit accessory and Connectivity Standards Alliance Matter device

Professional Installation

- Complete web-based commissioning and local web interface for advanced configuration
- Compatible with ABB i-bus® KNX
- External power supply: 10-36 V DC (SELV)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	VCO/S 150.2	2CKA006136A0220		0.254	1



CP-D 24/2.5

Power Supply Unit, 24 V DC, 2.5 A

For ABB device that needs a separate 24V power supply like:

- RoomTouch 4
- IQTouch 7" and 10"
- SmartTouch 10
- Busch-priOn® Power Bus Coupler
- KNX APP-Control Server
- Busch-VoiceControl

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CP-D 24/2.5	2CDG120037R0011		0.252	1



UK/S 32.2

Universal I/O Concentrator, 32-fold, MDRC

Used to connect push buttons or signal lamps, e.g. to an operating/display tableau. It has 32 channels which can be freely parameterised as inputs/outputs using the ETS software. The device requires an external 12 or 24 V DC auxiliary power supply.


Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	UK/S 32.2	2CDG110071R0011		0.18	1

ABB i-bus® KNX

Energy Management

ABB offers various solutions for decentral energy measurement on the basis of the KNX standard.


Version 1

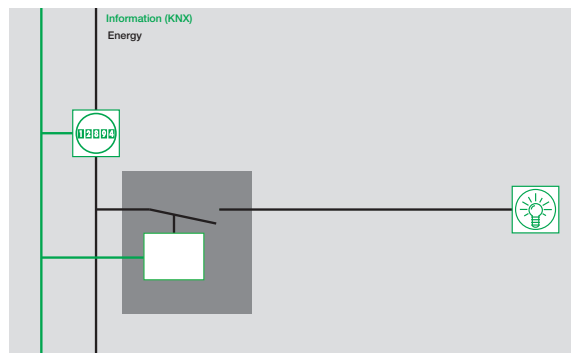

Electronic energy meters make the current energy values available on the KNX bus system in conjunction with a KNX interface. The measured data can be intermediately stored, evaluated and visualized from here.




Version 2

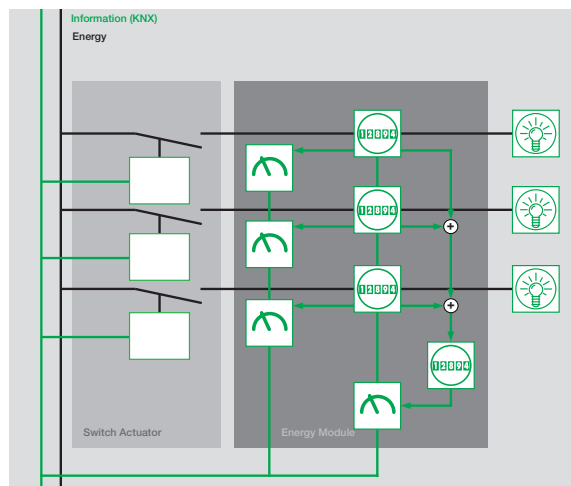

The Energy Module can record the energy consumption for the individual devices. It is used particularly when upgrading existing KNX systems and wherever energy measurement is required without switch functions. It facilitates a detailed and transparent insight into the energy consumption of a building. The current meter values can be sent and evaluated.



Version 3

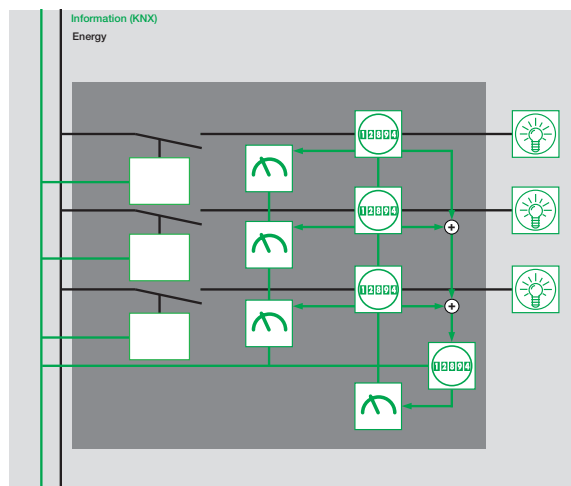

The Energy Actuator facilitates control of the connected consumer loads via the ABB i-bus® KNX. For each of the three switch channels, the individual consumption can be measured in the same way as for the Energy Module. For every channel, the proven functionality of the ABB i-bus® KNX Switch Actuators are available.



Intermediate meter for electrical energy



Electrical consumer (load)



Energy meter

	Energy Module EM/S 3.16.1	Energy Actuator SE/S 3.16.1	Meter Interface Module ZS/S 1.1 ¹⁾
General			
Supply voltage	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	4	4	2
Number of channels	3	3	–
Rated current I _n	16/20 A	16/20 A AX (C-Load)	–
Measuring range Current	0.025...20 A	0.025...20 A	Depending on meter connected ²⁾
Measuring range Voltage	95...265 V	95...265 V	Depending on meter connected ²⁾
Measuring range Frequency	45...65 Hz	45...65 Hz	50/60 Hz ± 5 %
Measurement values			
E – Active energy [kWh]	■	■	■
U – Voltage [V]	■	■	■
I – Current [A]	■	■	■
F – Frequency [Hz]	■	■	■
P – Active power [W]	■	■	■
Q – Reactive power [var]	–	–	■
S – Apparent power [VA]	■	■	■
PF – Power factor	■	■	■
CF – Crest factor	■	■	–
General functions			
Function Switch	–	■	–
Function Time	–	■	–
Function Scene	–	■	–
Function Logic	–	■	–
Function Priority	–	■	–
Load control with Energy Actuators as Master (up to ten SE/S 3.16.1 as slaves)	■	■	–
Load control as Slave	–	■	–
Sending delay (for value request)	–	–	■
Commissioning and diagnostic function			
Control and diagnosis via ABB i-bus® Tool	■	■	–

—

■ = Function is supported

– = Function is not supported

1) = In combination with ABB Energy Meter A and B series

2) = See also Electricity Meters Overview

ABB i-bus® KNX

Energy Management



SE/S 3.16.1

Energy Actuator, 3-fold, 16/20 AX, MDRC

Records the energy consumption of the connected electrical loads in the load circuit. Various electrical variables can be monitored and load peaks can be limited by simple load control. The 3 output channels can be manually operated and display the current switching state. The Energy Actuator can switch resistive, inductive and capacitive loads. The switching capacity corresponds to the SA/Sx.16.6.2.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SE/S 3.16.1	2CDG110136R0011		0.3	1



EM/S 3.16.1

Energy Module, 3-fold, 16/20 AX, MDRC

Measures energy consumption and various electrical parameters in the terminal current. Active power, Current, Voltage and Frequency can be monitored via threshold values and peak loads can be limited through a simple load control. The measured values are provided via ABB i-bus® KNX.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	EM/S 3.16.1	2CDG110148R0011		0.2	1



ZS/S 1.1

Meter Interface Module, MDRC

It records consumption and measured values of the electrical energy consumption meters. Using an infra-red interface, the ABB energy meter types of the A- and B-series are incorporated. The information and data which is read can be used, for example, for cost centre accounting, energy optimisation, monitoring of installations and visualisation.

The following values are available (depending on the meter type):

Meter reading

Active energy	Tariff 1-4, total
Reactive energy	Tariff 1-4, total

Power values

Active power	L1, L2, L3, total
Reactive power	L1, L2, L3, total
Apparent power	L1, L2, L3, total
Phase angle power	L1, L2, L3, total
Power factor	L1, L2, L3, total

Instrument values

Voltages	L1-N, L2-N, L3-N, L1-L2, L2-L3, L1-L3
----------	--

Currents	L1, L2, L3, N
Phase angle voltage	L1, L2, L3, total
Phase angle current	L1, L2, L3, total
Quadrant	L1, L2, L3, total
Mains frequency	

Other

Transformer ratio	Read CT and VT
Power failures	Send and delete
Tariffs	Read and changeover
Status information	Send and read
Communication	
monitoring	
Intermediate meter	Read and reset

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	ZS/S 1.1	2CDG110083R0011		0.13	1



QA/S 3.16.1



QA/S 3.64.1

Energy Analyzer, M-Bus, MDRC*

Compact and web-based stand-alone devices for energy management applications. For monitoring, logging, displaying and analyzing consumption data of up to 16 or 64 electricity, gas, water or heat meters via M-Bus. Automatic detection for ABB EQ meters (A/B-Series). Access to the device via web browser. The user interface provides graphical analysis functions, e.g. dashboard, historical data, instantaneous values, benchmark functions, cost allocation according to consumer groups and more. For further processing data can be exported cyclically (e.g. every month) via E-mail or upload to FTP server. Several data sharing options (e.g. Modbus TCP, Rest API) allow the communication with other systems.

* Pure M-Bus Master, no data routing from M-Bus to KNX

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
M-bus, 16 Devices	4	QA/S 3.16.1	2CDG110226R0011		0.15	1
M-bus, 64 Devices	4	QA/S 3.64.1	2CDG110227R0011		0.15	1

ABB i-bus® KNX

Safety and Monitoring



SMB/S 1.1

Fault Monitoring Unit, MDRC

It is used to detect and manage up to 100 fault messages which are processed within the unit and can be forwarded to a display unit. Furthermore, an optical and an acoustic collective status signal is provided. Messages can be acknowledged and data losses can be reported. The devices support message formats to DIN 19 235: messages with continuous lighting, new value messages with simple flashing light, initial value messages with simple acknowledgement, motor messages. Current values can be centrally scanned.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	SMB/S 1.1	GHQ6310085R0111		0.12	1



EUB/S 1.1

EIB Monitoring Unit, MDRC

Monitors up to 100 bus devices in KNX systems, which can be divided into 5 groups. The devices are monitored to ensure their presence and minimum functionality (send and receive). Monitoring can be undertaken based on the physical address or the group address. A total of four different monitoring modes are available. No additional power supply required, the device is powered from KNX bus.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	EUB/S 1.1	2CDG110066R0011		0.12	1



BDB/S 1.1

Data Logging Unit, MDRC

It detects local operation cycles and operating hours to plan the maintenance or durability evaluation of the devices. For each of the 35 channels to be monitored, limit values can be set and a message sent if this limit is exceeded. The logging of operating hours can be predetermined for the total or remaining time. These values can be modified via communication objects. No additional power supply required, the device is powered from KNX bus.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	BDB/S 1.1	2CDG110067R0011		0.12	1

ABB i-bus® KNX

Security – Alarm System KNX



The compact solution for security applications – the Security Terminals

The Security Terminal provides a compact security solution for KNX applications for detection and signalling of intrusion, personal attack and technical hazards. They are used as the interface between the security technology sensors and KNX.

Depending on the configuration, the devices feature 2, 4 or 8 inputs – so-called detector circuits or zones. They are used for monitoring connected passive detectors (e.g. magnetic contacts, glass break sensors, etc.) to the ABB i-bus® KNX as well as for connection of floating contacts in applications with enhanced security requirements.

Through the connection of security technology and KNX, the detectors employed can, in addition to the security functions, also be used for heating control (e.g. window contact signal for control of the heating valve) or lighting control (e.g. central switch off of the lighting when the alarm logic is set).

The Security Terminals can be used as autonomous systems with the integrated alarm logic, in conjunction with the Security Module SCM/S or with an Intrusion Alarm Panel.



The application program offers several functions for security applications, such as

- Direct and delayed setting
- Internal setting with occupancy and external setting when absent
- Setting of the connected detector types
- Reset input and setting input
- Detector monitoring
- Zones (detector circuits) can be switched off
- Different types of alarms
- Setting for freely programmable relay outputs, e.g. for direct control of signalling devices.

ABB i-bus® KNX

Security – Alarm System KNX

	Standard Security			
	MT/U 2.12.2	MT/S 4.12.2M	MT/S 8.12.2M	SCM/S 1.1
General				
Supply voltage	KNX	KNX	KNX	KNX
Auxiliary power supply	12 V DC	12 V DC	12 V DC	–
Type of installation	FM	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	–	4	4	2
Inputs (extendable via bus)	2	4	8	0 (64)
Outputs	2 x Relais	3 x Relais	3 x Relais	1 x Relais
Functions				
Connection of conventional security sensors/devices	■	■	■	–
Connection of 4-wired security bus sensors/devices	–	–	–	–
Event log	–	–	–	■ (250)
Remote alarming	Optional via KNX	Optional via KNX	Optional via KNX	Optional via KNX
Back-up power supply				
Optional via NTU/S 12.2000.1 and SU/S 30.640.2	■	■	■	–
Optional via SU/S 30.640.2	–	–	–	■
Integrated back-up power	–	–	–	–
Certifications				
VdS	–	–	–	–
EN 50 131/IEC 62 642	–	–	–	–
Commissioning and diagnostic functions				
Commissioning and diagnostic via webserver	–	–	–	–

—
 ■ = Function is supported
 – = Function is not supported



SCM/S 1.1

Security Module, MDRC

The module provides the necessary logic functions to link the various KNX devices (e.g. zone terminals) to a security system. Up to 64 different zones can be evaluated via communication objects. Arming, operation and display are also implemented using communication objects. The device has a freely programmable relay output for connection of a signal encoder. An uninterruptible KNX power supply with battery back-up is recommended for security function buffering on mains failure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	SCM/S 1.1	2CDG110024R0011		0.13	1



MT/S 8.12.2M


Security Terminal

They are used as the interface between the security technology sensors and the KNX. The device features inputs, so-called zones. They are used for monitoring connected passive detectors, e.g. magnetic contacts and/or glass break sensors on the ABB i-bus® KNX and/or for connection of floating contacts in applications with enhanced security requirements. The device can be used as a system with autonomous alarm logic or in combination with the Security Module SCM/S or an Intrusion Alarm Panel. The device requires an external 12 V DC SELV auxiliary power supply, (e.g. NTU/S 12.2000.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, MDRC	4	MT/S 4.12.2M	2CDG110109R0011		0.19	1
8-fold, MDRC	4	MT/S 8.12.2M	2CDG110110R0011		0.19	1
2-fold, FM	–	MT/U 2.12.2	2CDG110111R0011		0.08	1

ABB i-bus® KNX

Security – Components



MRS/W

Magnet Reed Contact Set

For opening surveillance of windows and doors, complete for bolting or drilling. Contents: 1 magnet, 1 reed contact with 4.0 m connection cable LIYY 4 x 0.14 mm², 2 housings, 2 spacer plates, 2 flanges and 4 anti-magnetic fixing screws. VdS class B.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	MRS/W	GHQ3201972R0001		0.1	1
Saver Set (20 pcs.), white	–	VMRS/W	GHQ3201972R0011		1.99	1



MC-C 1.1

Rolling Door Reed Contact

The Rolling Door Reed Contact Set is mounted mainly on rolling, sliding, and tilting doors. The contact housing is mounted on the ground (a flat support surface is required).

Only screws made of anti-magnetic material may be used for mounting.

Due to the weatherproof and mechanically stable design of the contact housing, the circuit is mostly protected against damage when rubber-tired vehicles drive over it.

The 4-wire cable is protected by a plastic-coated metal hose.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
VdS Class B, EN Grade 2	–	MC-C1.1	2CDG250006R0011		0.3	1



SPGS/W

Passive Glass Break Sensor

For opening surveillance of windows and doors, complete for bolting or drilling. VdS class B.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	SPGS/W	GHV9220004V0009		0.11	1



WRK/W

Lock Bolt Switching Contact with Connection Cable

For installation in the strike plate, for lock monitoring on doors. Water-tight IP 67, with 2.5 m connection cable LIYY 3 x 0.14 mm². VdS class C.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	WRK/W	2CDG250003R0011		0.03	1



TD-C 1.1

Gas Detector with Relay Contact

The Gas Detector is used for monitoring gas leakage of domestic and commercial rooms. It detects gases like propane, methane and butane as well as acetylene, city gas and natural gas. The detector can be connected to ABB intrusion and fire alarm control panels, as well as ABB i-bus® binary inputs via a potential-free relay contact. Suitable as a stand-alone device. An external power supply with 12-24 V DC is required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TD-C 1.1	2CDG220023R0011		0.167	1



SWM 4

Water Detector for Detector Groups

A resin-encapsulated water detector with gold-plated Termipoint pins, detects water ingress, e.g., pipe fractures, ingress of groundwater and sewage, water damage caused by washing machines and dishwashers etc. before the damage becomes too expensive. For operation directly on detector circuits of intrusion alarm panels or security terminals.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SWM 4	GHQ4030001R0004		0.16	1



SWM 4/RN

Water Detector with Relay, 12 V

Features a potential free changeover contact output, an LED parallel output and a LED display. The detector resets itself automatically when the affected area dries out. The device draws its power from an external 10 ... 23 V DC voltage source.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SWM4/RN	GHQ4030001R0012		0.23	1



6833/01-84-500

Busch-Smoke Alarm® ProfessionalLine

For early detection of smouldering fires and open fires with smoke development indoors according to the photooptical measurement principle (Tyndall). With installed Lithium battery. Battery life min. 10 years. With test button and muting. Can be networked with up to 12 detectors using the radio module. Can be networked via 2-wire twisted pair cable with up to 12 detectors. Acoustic alarm: installed horn (85 dBA). Cyclic functional test. Including attachment material – VdS certified. Conform to EN 14604 studio white.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Not networkable	–	6833-84-500	2CKA006800A2720		0.154	1
Networkable	–	6833/01-84-500	2CKA006800A2721		0.268	1

ABB i-bus® KNX

Security – Components



6827-84

Busch-Smoke Alarm® Radio Module

For wireless networking of multiple Busch smoke alarms®/heat alarms.

With installed Lithium battery. Battery life min. 10 years. Radio frequency: 868 MHz.

Range: max. 100 m outdoors, max. 30 m indoors.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6828	2CKA006800A2514		0.268	1



6829-84

Busch-Smoke Alarm® Relay

For connecting external systems, e.g. KNX. Relay contact, floating changeover contact

230 V~ max. 5 A. Cable connection: up to 2 x 2 x 1.5 mm². With installed radio module.

Rated voltage: 230 V~.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white	–	6829-84	2CKA006800A2515		0.268	1



SSS

Indoor Siren, 12 V DC

Electronic solid-state siren with intermittent tone for alarm purposes in indoor installations.

External dimensions: ø x H = 90 mm x 37 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SSS	GHV9270001V0001		0.17	1



SSF/GB

Siren with Strobe

An aluminium protective housing with additional protective enamel coating. Protected

against sabotage by a case tamper contact. The alarm inputs are wired onto a terminal strip.

With fixing screw (M4) for potential equalization on the base.

Dimensions (H x W x D) = 258 mm x 205 mm x 88 mm; Color: RAL 9002 Environmental class III to VdS.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SSF/GB	GHQ3050018R0001		1.81	1

Notes

ABB i-bus® KNX

User Operation – Design Ranges –
Unique diversity of the range

01



02



03



04



05



06



07



08




09



10



11

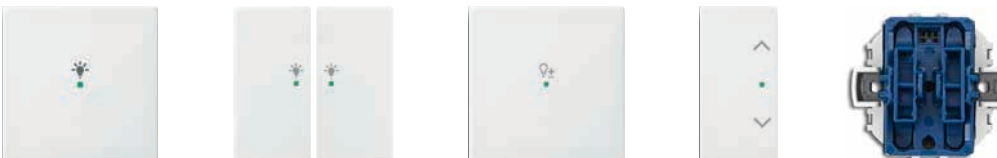

01 tacteo

02 ABB Tenton®

03 carat®

04 pure stainless steel

05 Busch-axcent®

06 future® linear

07 Millenium*

08 Zenit for VDE/NEMA markets

09 Busch-priOn®

10 ABB Trevion®

11 Bus Coupling Unit –
for conventional Busch-Jaeger series**

Further information regarding the ABB switch ranges are available on <https://new.abb.com/low-voltage/products/residential-products/switch-ranges>





* Millenium and Zenit series are only available in selected markets.

** Busch-Jaeger switch ranges only available for selected markets. For further information please contact your local ABB office.

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	Busch-priOn® suitable for KNX bus coupler 6120/12-101 or 6120/13 (depending on the specific combination)		
			
	6340-xx-101 1/2 gang	6341-xx-101 rotary control element	6342-xx-101 3/6 gang
KNX function			
Switching, rocker switch total	■	–	■
Switching, rocker switch left/right	■	■	■
Dimming, rocker switch total	■	–	■
Dimming, rocker switch left/right	■	–	■
Blind, rocker switch total	■	–	■
Blind, rocker switch total left/right	■	■	■
Short-long operation, rocker switch left/right	■	–	■
Value sender, rocker switch total	■	–	■
Value sender, rocker switch left/right	■	–	■
Value dimming sensor, rocker switch total	■	■	■
Red/green LED status illumination (red/green/off)	–	–	–
RGB LED function illumination + status illumination	1 LED per rocker switch	1 LED per button	1 LED per rocker switch
Setting the RTC operating mode	■	–	■
Value sender, 2 objects, rocker switch left/right	■	–	■
Light scene extension unit with light scene memory function	■	–	■
Level switch, rocker switch total	■	–	■
Level switch, rocker switch total left/right	■	–	■
Multiple operation, rocker switch left/right	■	–	■
IR remote control channels (up to 13 channels)	–	–	–
Light scene unit (8 scenes for up to 8 actuators)	–	–	–
Light scene unit (10 scenes for up to 10 actuators)	–	–	–
Programmable shift key	–	–	–
Proximity function	–	–	–
Room temperature controller only			
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
Media box/CD/DVD/radio	–	–	–
Short-time timer	–	–	–
Weekly timer	–	–	–
Alarm clock	–	–	–
Messages	–	–	–
Screen saver	–	–	–
Display text/value	–	–	–
Device lock	–	–	–
Logic function (including light scenes)	■	■	■
Busch-Watchdog 4 channels	–	–	–

■ = Function is supported

– = Function is not supported

Program



6345-xx-101



6351-825-101 end strip top with information display, room temperature controller, IR receiver and proximity sensor + 6342-xx-101 3/6 gang

KNX function		
Switching, rocker switch total	–	■
Switching, rocker switch left/right	–	■
Dimming, rocker switch total	–	■
Dimming, rocker switch left/right	–	■
Blind, rocker switch total	–	■
Blind, rocker switch total left/right	–	■
Short-long operation, rocker switch left/right	–	■
Value sender, rocker switch total	–	■
Value sender, rocker switch left/right	–	■
Value dimming sensor, rocker switch total	–	■
Red/green LED status illumination (red/green/off)	–	–
RGB LED function illumination + status illumination	–	1 LED per rocker switch
Setting the RTC operating mode	–	■
Value sender, 2 objects, rocker switch left/right	–	■
Light scene extension unit with light scene memory function	–	■
Level switch, rocker switch total	–	■
Level switch, rocker switch total left/right	–	■
Multiple operation, rocker switch left/right	–	■
IR remote control channels (up to 13 channels)	–	■
Light scene unit (8 scenes for up to 8 actuators)	–	–
Light scene unit (10 scenes for up to 10 actuators)	–	–
Programmable shift key	–	–
Proximity function	–	■
Room temperature controller only		
Temperature reading	–	–
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
Media box/CD/DVD/radio	–	–
Short-time timer	–	–
Weekly timer	–	–
Alarm clock	–	–
Messages	–	–
Screen saver	–	–
Display text/value	–	■
Device lock	–	–
Logic function (including light scenes)	■	■
Busch-Watchdog 4 channels	■	–

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	Busch-priOn® suitable for KNX bus coupler 6120/12-101 or 6120/13 (depending on the specific combination)	
		
	6350-825-101 end strip top with IR receiver and proximity sensor	6352-xx-101 end strip bottom with temperature sensor
KNX function		
Switching, rocker switch total	–	–
Switching, rocker switch left/right	–	–
Dimming, rocker switch total	–	–
Dimming, rocker switch left/right	–	–
Blind, rocker switch total	–	–
Blind, rocker switch total left/right	–	–
Short-long operation, rocker switch left/right	–	–
Value sender, rocker switch total	–	–
Value sender, rocker switch left/right	–	–
Value dimming sensor, rocker switch total	–	–
Red/green LED status illumination (red/green/off)	–	–
RGB LED function illumination + status illumination	–	–
Setting the RTC operating mode	–	–
Value sender, 2 objects, rocker switch left/right	–	–
Light scene extension unit with light scene memory function	–	–
Level switch, rocker switch total	–	–
Level switch, rocker switch total left/right	–	–
Multiple operation, rocker switch left/right	–	–
IR remote control channels (up to 13 channels)	■	–
Light scene unit (8 scenes for up to 8 actuators)	–	–
Light scene unit (10 scenes for up to 10 actuators)	–	–
Programmable shift key	–	–
Proximity function	■	–
Room temperature controller only		
Temperature reading	–	■
RTC settings	–	–
Illuminated display	–	–
Fan coil operation for heating and cooling	–	–
Media box/CD/DVD/radio		
Media box/CD/DVD/radio	–	–
Short-time timer	–	–
Weekly timer	–	–
Alarm clock	–	–
Messages	–	–
Screen saver	–	–
Display text/value	–	–
Device lock	–	–
Logic function (including light scenes)		
Logic function (including light scenes)	–	–
Busch-Watchdog 4 channels		
Busch-Watchdog 4 channels	–	–

■ = Function is supported

– = Function is not supported

Program	Millenium		
			
	6125/20-500 1/2 gang	6126/20-500 2/4 gang	6129/20-500 3/6 gang
KNX function			
Switching, button pair	■	■	■
Switching, button upper/lower	■	■	■
Dimming, button pair	■	■	■
Dimming, button upper/lower	■	■	■
Blind, button pair	■	■	■
Blind, button upper/lower	■	■	■
Short-long operation, button upper/lower	■	■	■
Value transmitter, button pair	■	■	■
Value transmitter, button upper/lower	■	■	■
Value dimming sensor, button pair	■	■	■
Value dimming sensor, upper/lower	■	■	■
RGB LED function illumination + status illumination	■	■	■
Setting the RTC operating mode	■	■	■
Value transmitter, 2 objects, button upper/lower	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Step switch, button pair	■	■	■
Step switch, button upper/lower	■	■	■
Multiple operation, button upper/lower	■	■	■
IR remote control channels (up to 5 channels)	–	–	–
Room temperature controller only			
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■	■
Busch-Watchdog 4 channels	–	–	–

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	Millenium	
		
	6129/21-500 3/6 gang with IR	6124/20-500
KNX function		
Switching, button pair	■	–
Switching, button upper/lower	■	–
Dimming, button pair	■	–
Dimming, button upper/lower	■	–
Blind, button pair	■	–
Blind, button upper/lower	■	–
Short-long operation, button upper/lower	■	–
Value transmitter, button pair	■	–
Value transmitter, button upper/lower	■	–
Value dimming sensor, button pair	■	–
Value dimming sensor, upper/lower	■	–
RGB LED function illumination + status illumination	■	–
Setting the RTC operating mode	■	–
Value transmitter, 2 objects, button upper/lower	■	–
Light scene extension unit with light scene memory function	■	–
Step switch, button pair	■	–
Step switch, button upper/lower	■	–
Multiple operation, button upper/lower	■	–
IR remote control channels (up to 5 channels)	■	–
Room temperature controller only		
Temperature reading	–	■
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■
Busch-Watchdog 4 channels	–	–

—
 ■ = Function is supported
 – = Function is not supported

Program	Zenit		
			
	6125/98-509 1/2 gang	6126/98-509 2/4 gang	6129/98-509 3/6 gang
KNX function			
Switching, button pair	■	■	■
Switching, button upper/lower	■	■	■
Dimming, button pair	■	■	■
Dimming, button upper/lower	■	■	■
Blind, button pair	■	■	■
Blind, button upper/lower	■	■	■
Short-long operation, button upper/lower	■	■	■
Value transmitter, button pair	■	■	■
Value transmitter, button upper/lower	■	■	■
Value dimming sensor, button pair	■	■	■
Value dimming sensor, upper/lower	■	■	■
RGB LED function illumination + status illumination	■	■	■
Setting the RTC operating mode	■	■	■
Value transmitter, 2 objects, button upper/lower	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Step switch, button pair	■	■	■
Step switch, button upper/lower	■	■	■
Multiple operation, button upper/lower	■	■	■
IR remote control channels (up to 5 channels)	–	–	–
Room temperature controller only			
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■	■
Busch-Watchdog 4 channels	–	–	–

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	Zenit	
		
	6129/98-509 3/6 gang with IR	6124/88-509
KNX function		
Switching, button pair	■	–
Switching, button upper/lower	■	–
Dimming, button pair	■	–
Dimming, button upper/lower	■	–
Blind, button pair	■	–
Blind, button upper/lower	■	–
Short-long operation, button upper/lower	■	–
Value transmitter, button pair	■	–
Value transmitter, button upper/lower	■	–
Value dimming sensor, button pair	■	–
Value dimming sensor, upper/lower	■	–
RGB LED function illumination + status illumination	■	–
Setting the RTC operating mode	■	–
Value transmitter, 2 objects, button upper/lower	■	–
Light scene extension unit with light scene memory function	■	–
Step switch, button pair	■	–
Step switch, button upper/lower	■	–
Multiple operation, button upper/lower	■	–
IR remote control channels (up to 5 channels)	■	–
Room temperature controller only		
Temperature reading	–	■
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■
Busch-Watchdog 4 channels	–	–

—
 ■ = Function is supported
 – = Function is not supported

Program	Multifunction control elements, suitable for KNX bus coupler 6120/12-101 and 6120/13		
			
	6125/02 1/2 gang 6126/02 2/4 gang 6127/02 4/8 gang	6129/01 3/6 gang with IR	6128/28 2/4 gang with RTC
KNX function			
Switching, rocker switch total	■	■	■
Switching, rocker switch left/right	■	■	■
Dimming, rocker switch total	■	■	■
Dimming, rocker switch left/right	■	■	■
Blind, rocker switch total	■	■	■
Venetian blind, rocker switch total left/right	■	■	■
Short-long operation, rocker switch left/right	■	■	■
Value sender, rocker switch total	■	■	■
Value sender, rocker switch left/right	■	■	■
Value dimming sensor, rocker switch total	■	■	■
Red/green LED status illumination (red/green/off)	–	–	–
RGB LED function illumination + status illumination	Two LEDs per rocker switch	Two LEDs per rocker switch	Two LEDs per rocker switch
Setting the RTC operating mode	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Level switch, rocker switch total	■	■	■
Level switch, rocker switch total left/right	■	■	■
Multiple operation, rocker switch left/right	■	■	■
IR remote control channels (up to 5 channels)	–	■	–
Room temperature controller only			
Temperature reading	–	–	■
RTC settings	–	–	■
Illuminated display	–	–	■
Fan coil operation for heating and cooling	–	–	■
Logic function (including light scenes)	■	■	■
Busch-Watchdog 4 channels	–	–	–
ABB			
basic55®	–	–	–
future® linear	■	■	■
alpha exclusive/nea	–	–	–
Busch-axcent®	■	■	■
solo®	■	■	■
pure stainless steel	■	■	■
carat®	■	■	■
ocean®	–	–	–
All Weather 44	–	–	–

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	ABB Trevion	
		
	KK/U4.55.1 KK/U4.63.1 KK/U4.70.1	SD/U12.55.1-825 SD/U12.63.1-825 SD/U12.70.1-4015
KNX function		
Switching, rocker switch total	■	■
Switching, rocker switch (2-Button)	■	■
Dimming, rocker switch total	■	■
Dimming, rocker switch (2-Button)	■	■
Sliding Dimming, rocker	■	■
Blind, rocker switch total	■	■
Venetian blind, rocker switch total (2-Button)	■	■
Sliding blinds, rocker	■	■
Switching sequence	■	■
Switching sequence (2-button)	■	■
Light scene extension unit with light scene memory function	■	■
Send value/Multiple operation	■	■
RGB-Control	–	■
Informationpage	–	■
Weekly-Timer	–	■
Alarm	■	■
Room temperature controller		
Internal RTC's	–	2
Temperature reading	–	■
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
RGB-Function/Status/Animation-LED	■	–
Internal temperature sensor	■	■
Binary Input/ external temperature sensor	–	■
Logic function (including light scenes)	■	■
Channels (for movement detection)	–	–
ABB Design Ranges		
Busch-balance SI®	■	■
future®/ future® linear	■	■
Busch-axcent®/ Busch-axcent® pur	■	■
solo®	■	■
pure stainless steel	■	■
carat®	■	■
Dynasty	■	■
KNX Data Secure	■	■

■ = Function is supported

– = Function is not supported

> Table of contents

Program	ABB Trevion		
			
	64765-xx-500	64764-xx-500	64762-xx-500
KNX function			
Switching, rocker switch total	■	–	–
Switching, rocker switch (2-Button)	■	■	■
Dimming, rocker switch total	■	–	–
Dimming, rocker switch (2-Button)	■	■	■
Sliding Dimming, rocker	■	–	–
Blind, rocker switch total	■	–	–
Venetian blind, rocker switch total (2-Button)	■	■	■
Sliding blinds, rocker	■	–	–
Switching sequence	■	–	–
Switching sequence (2-button)	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Send value/Multiple operation	■	■	■
RGB-Control	–	–	–
Informationpage	–	–	–
Weekly-Timer	–	–	–
Alarm	–	–	–
Room temperature controller			
Internal RTC's	–	–	–
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
RGB-Function/Status/Animation-LED			
–	–	–	–
Internal temperature sensor			
–	–	–	–
Binary Input/ external temperature sensor			
–	–	–	–
Logic function (including light scenes)			
■	■	■	■
Channels (for movement detection)			
4	4	4	4
ABB Design Ranges			
Busch-balance SI®	■	■	■
future®/ future® linear	■	■	■
Busch-axcent®/ Busch-axcent® pur	■	■	■
solo®	■	■	■
pure stainless steel	■	■	■
carat®	■	■	■
Dynasty	■	■	■
KNX Data Secure			
■	■	■	■

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	FM Watchdog with integrated bus coupler	Standard control elements, bus coupler included with package	FM push-button coupling unit with integrated bus coupler	
				
	6122/10	6125/01 1 gang 6126/01 2 gang 6127/01 4 gang	6108/06 1/2 gang	6108/07 2/4 gang
KNX function				
Switching, rocker switch total	–	■	■	■
Switching, rocker switch left/right	–	–	■	■
Dimming, rocker switch total	–	■	■	■
Dimming, rocker switch left/right	–	–	■	■
Blind, rocker switch total	–	■	■	■
Venetian blind, rocker switch total left/right	–	–	■	■
Short-long operation, rocker switch left/right	–	–	■	■
Value sender, rocker switch total	–	■	■	■
Value sender, rocker switch left/right	–	–	■	■
Value dimming sensor, rocker switch total	–	–	■	■
Red/green LED status illumination (red/green/off)	–	Two LEDs per rocker switch	–	–
RGB LED function illumination + status illumination	–	–	One LED per rocker switch	One LED per rocker switch
Setting the RTC operating mode	–	–	■	■
Value sender, 2 objects, rocker switch left/right	–	■	■	■
Light scene extension unit with light scene memory function	–	■	■	■
Level switch, rocker switch total	–	–	■	■
Level switch, rocker switch total left/right	–	–	■	■
Multiple operation, rocker switch left/right	–	–	–	–
IR remote control channels (up to 5 channels)	–	–	–	–
Room temperature controller only				
Temperature reading	–	–	■	■
RTC settings	–	–	–	–
Illuminated display	–	–	–	–
Fan coil operation for heating and cooling	–	–	–	–
Logic function (including light scenes)	■	–	–	–
Busch-Watchdog 4 channels	■	–	–	–
ABB				
basic55®	–	–	■	■
future® linear	■	■	■	■
alpha exclusive/nea	–	–	–	–
Busch-axcent®	■	■	■	■
solo®	■	■	■	■
pure stainless steel	■	■	■	■
carat®	■	■	■	■
ocean®	–	–	–	–
All Weather 44	–	–	–	–

■ = Function is supported

– = Function is not supported

Program			
FM push-button coupling unit with integrated bus coupler			
			
	6108/60 6-fold KNX sensor	6108/06-AP 1/2 gang	6108/07-AP 2/4 gang
KNX function			
Switching, rocker switch total	■	■	■
Switching, rocker switch left/right	–	■	■
Dimming, rocker switch total	■	■	■
Dimming, rocker switch left/right	–	■	■
Blind, rocker switch total	■	■	■
Venetian blind, rocker switch total left/right	–	■	■
Short-long operation, rocker switch left/right	–	■	■
Value sender, rocker switch total	■	■	■
Value sender, rocker switch left/right	–	■	■
Value dimming sensor, rocker switch total	■	■	■
Red/green LED status illumination (red/green/off)	–	1 LED	–
RGB LED function illumination + status illumination	–	–	–
Setting the RTC operating mode	–	■	■
Value sender, 2 objects, rocker switch left/right	–	■	■
Light scene extension unit with light scene memory function	■	■	■
Level switch, rocker switch total	■	■	■
Level switch, rocker switch total left/right	–	■	■
Multiple operation, rocker switch left/right	–	–	–
IR remote control channels (up to 5 channels)	–	–	–
Room temperature controller only			
Temperature reading	■	–	–
RTC settings	■ (only as slave)	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	■ (only as slave)	–	–
Logic function (including light scenes)	–	–	–
Busch-Watchdog 4 channels	–	–	–
ABB			
basic55®	■	■	■
future® linear	■	■	■
alpha exclusive/nea	■	■	■
Busch-axcent®	■	■	■
solo®	■	■	■
pure stainless steel	■	■	■
carat®	■	■	■
ocean®	–	■	■
All Weather 44	–	■	■

—
 ■ = Function is supported
 – = Function is not supported


ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	FM room temperature controller				
					
	6108/18	6109/18	6109/28	6109/08	6109/05
Control element					
Standard function	–	–	–	–	–
Additional function	–	–	–	–	–
Indication					
Display	■	■	■	–	–
Actual temperature display	■	■	■	–	–
Status display via text and/or icon	–	■	■	–	–
RTC					
Manual operation	■	■	■	–	–
Heating and/or cooling with/without additional stage	■	■	■	■	■
Fan coil	■	■	■	■	■
Master/slave	■	■	■	master only	master only
Basic load	■	■	■	■	■
Internal and/or external actual temperature sensor	■	■	■	■	external only
Internal actual temperature sensor	■	■	■	■	■
Air quality					
CO ₂	–	–	■	–	–
Humidity	–	–	■	–	–
Air pressure	–	–	■	–	–
Universal input/binary input					
Switching/alarm	–	■	■	■	■
Dimming	–	■	■	■	■
Blind	–	■	■	■	■
Value	–	■	■	■	■
Scene	–	■	■	■	■
Switching sequences	–	■	■	■	■
Multi	–	■	■	■	■
Pulse counter	–	■	■	■	■
Universal analogue input e.g. external sensors					
0–10 V (external)	–	■	■	■	■
1–10 V (external)	–	■	■	■	■
Upper/lower threshold value	–	■	■	■	■
Universal input of external temperature sensor (PT1000 or 6226/T)					
Actual temperature sensor	–	■	■	■	■
Temperature limiter	–	■	■	■	■
ABB					
basic55®	■	■	■	■	–
future® linear	■	■	■	■	–
alpha exclusive/nea	–	■	■	■	–
Busch-axcent®	■	■	■	■	–
solo®	■	■	■	■	–
pure stainless steel	■	■	■	■	–
carat®	■	■	■	■	–
ocean®	–	–	–	–	–
All Weather 44	–	–	–	–	–

– = Function is not supported
■ = Function is supported

> Table of contents

Program		ABB tacteo®			
					
Square (vert.)	(86 mm x 86 mm)	TB/U1.1.1-CG	TB/U2.4.1-CG	TB/U4.4.1-CG	TB/U6.4.1-CG
Square (horiz.)	(86 mm x 86 mm)		TB/U2.5.1-CG	TB/U4.5.1-CG	TB/U6.5.1-CG
Vertical	(86 mm x 115 mm)	TB/U1.2.1-CG	TB/U2.7.1-CG	TB/U4.7.1-CG	TB/U6.7.1-CG
Horizontal	(115 mm x 86 mm)	TB/U1.3.1-CG	TB/U2.8.1-CG	TB/U4.8.1-CG	TB/U6.8.1-CG
Premium customization		TB/U1-CG	TB/U2-CG	TB/U4-CG	TB/U6-CG
Control element					
Standard function		■	■	■	■
Additional function		■	■	■	■
Indication					
Display		—	—	—	—
Actual temperature display		—	—	—	—
Status display via text and/or icon		—	—	—	—
RTC					
Manual operation		—	—	—	—
Heating and/or cooling with/ without additional stage		—	—	—	—
Fan coil		—	—	—	—
Master/slave		—	—	—	—
Basic load		—	—	—	—
Internal and/or external actual temperature sensor		—	—	—	—
Internal actual temperature sensor		■	■	■	■
Installation					
VDE		■	■	■	■
BS		■	■	■	■
IT	(only as 115 mm x 86 mm)	■	■	■	■
NEMA	(only as 86 mm x 115 mm)	■	■	■	■

—
 ■ = Function is supported
 — = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program		ABB tacteo®		
				
Square (vert.)	(86 mm x 86 mm)	TR/U.1.1-CG	TBW/U.1.1-CG	TA/U3.1.1-CG
Square (horiz.)	(86 mm x 86 mm)			
Vertical	(86 mm x 115 mm)	TR/U.2.1-CG	TBW/U.2.1-CG	TA/U3.2.1-CG
Horizontal	(115 mm x 86 mm)	TR/U.3.1-CG	TBW/U.3.1-CG	TA/U3.3.1-CG
Premium customization		TR/U-CG	TBW/U-CG	TA/U3-CG
Control element				
Standard function		■	■	■
Additional function		■	■	–
Indication				
Display		■	–	–
Actual temperature display		■	–	–
Status display via text and/or icon		■	–	–
RTC				
Manual operation		■	–	–
Heating and/or cooling with/ without additional stage		■	–	–
Fan coil		■	–	–
Master/slave		■	–	–
Basic load		■	–	–
Internal and/or external actual temperature sensor		■	–	–
Internal actual temperature sensor		■	■	■
Installation				
VDE		■	■	■
BS		■	■	■
IT	(only as 115 mm x 86 mm)	■	■	■
NEMA	(only as 86 mm x 115 mm)	■	■	■

—
 ■ = Function is supported
 – = Function is not supported

Program		ABB tacteo®		
				
Vertical	(86 mm x 157 mm)	TB/U12.7.1-CG	TBR/U4.7.1-CG	TSN/U.2.1-CG
Horizontal	(157 mm x 86 mm)	TB/U12.8.1-CG	TBR/U4.8.1-CG	
Premium customization		TB/U12-CG	TBR/U4-CG	TSN/U-CG
Control element				
Standard function		■	■	■
Additional function		■	■	–
Indication				
Display		–	■	–
Actual temperature display		–	■	–
Status display via text and/or icon		–	■	–
RTC				
Manual operation		–	■	–
Heating and/or cooling with/ without additional stage		–	■	–
Fan coil		–	■	–
Master/slave		–	■	–
Basic load		–	■	–
Internal and/or external actual temperature sensor		–	■	–
Internal actual temperature sensor		■	■	■
Installation				
VDE		■	■	■
BS		■	■	■
IT	(only as 157 mm x 86 mm)	–	–	■
NEMA	(only as 86 mm x 157 mm)	■	■	■

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	ABB Tenton®			
	Control Elements	Operating function with RTC extension unit	Room temp. controller with oper. Function	RTC w. CO ₂ /humidity sens. a. oper. Function
				
	SB/U8.0.1-xxx SB/U12.0.1-xxx	SBS/U6.0.1-xxx SBS/U10.0.1-xxx	SBR/U6.0.1-xxx SBR/U10.0.1-xxx	SBC/U6.0.1-xxx SBC/U10.0.1-xxx
KNX function Switching, rocker switch total	■	■	■	■
Switching, rocker switch left/right	■	■	■	■
Dimming, rocker switch total	■	■	■	■
Dimming, rocker switch left/right	■	■	■	■
Blind switch rocker total	■	■	■	■
Blind switch rocker total left/right	■	■	■	■
Short-long operation, switch rocker left/right	■	■	■	■
Value sender rocker switch total	■	■	■	■
Value sender switch rocker left/right	■	■	■	■
Value dimming sensor, switch rocker total	■	■	■	■
Red/green LED status illumination (red/green/off) 1 LED per switch rocker 1 LED per switch rocker	■	■	■	■
RGB LED function illumination + status illumination	■	■	■	■
1 LED per switch rocker	■	■	■	■
Setting the RTC operating mode	■	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■	■
Light scene extension unit with light scene memory function	■	■	■	■
Level switch, switch rocker total	■	■	■	■
Level switch, switch rocker total left/right	■	■	■	■
Multiple operation, rocker switch left/right	■	■	■	■
IR remote control channels (up to 13 channels)				
Light scene unit (8 scenes for up to 8 actuators)	■	■	■	■
Light scene unit (10 scenes for up to 10 actuators)	■	■	■	■
Internal RTC function rocker total		■	■	■
Internal RTC function left/right		■	■	■
Programmable shift key				
Proximity function				
Room temperature controller			■	■
Temperature sensor	■	■	■	■
Master/Slave configuration			■	■
Slave configuration		■		
RTC settings			■	■
Base-load operation			■	■
Illuminated display		■	■	■
Fan Coil operation for heating and cooling		■	■	■
CO ₂ -Measurement				■
Humidity-Measurement				■
Dewpoint-management				■
Temperature				■
Device lock	■	■	■	■
Logic function (including light scenes)	■	■	■	■
Busch-Watchdog 4 channels				

Program	PEONIA®					
						
	PEB/U2.0.1-xxx	PEB/U3.0.1-xxx	PEB/U5.0.1-xxx	PEBR/U2.0.1-xxx	PEBR/U3.0.1-xxx	PEBR/U5.0.1-xxx
KNX function						
Switching, rocker switch total	■	■	■	■	■	■
Switching, rocker switch left/right	■	■	■	■	■	■
Dimming, rocker switch total	■	■	■	■	■	■
Dimming, rocker switch left/right	■	■	■	■	■	■
Blind switch rocker total	■	■	■	■	■	■
Blind switch rocker total left/right	■	■	■	■	■	■
Short-long operation, switch rocker left/right	■	■	■	■	■	■
Value sender rocker switch total	■	■	■	■	■	■
Value sender rocker switch left/right	■	■	■	■	■	■
RGB LED function illumination + Status illumination	■	■	■	■	■	■
RGB LED Ambient illumination	■	■	■	■	■	■
Setting the RTC operating mode	■	■	■	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■	■	■	■
Light scene extension units with light scene memory function	■	■	■	■	■	■
Step switch, switch rocker total	■	■	■	■	■	■
Step switch, switch rocker left/right	■	■	■	■	■	■
Multiple operation, rocker switch left/right	■	■	■	■	■	■
Proximity function	■	■	■	■	■	■
Energy saving function	■	■	■	■	■	■
Dynamic display	–	–	–	■	■	■
Room temperature controller only						
RTC Capacitive touch button	–	–	–	■	■	■
Vibration feedback	–	–	–	■	■	■
Temperature reading	–	–	–	■	■	■
Single/Master/Slave configuration	–	–	–	■	■	■
RTC setting	–	–	–	■	■	■
Base-load operation	–	–	–	■	■	■
Illumination display	–	–	–	■	■	■
Fan coil operation or heating and cooling	–	–	–	■	■	■
5 Logic channels (incl. Priority, Logic gate, Staircase lighting, Delay, Min/max value transducer, Threshold value hysteresis, Light scene actuator)	■	■	■	■	■	■

—
 ■ = Function is supported
 – = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	Yurika			
				
	YUB/U1.0.1-xxx	YUB/U2.0.1-xxx	YUB/U3.0.1-xxx	YUB/U4.0.1-xxx
KNX function				
Switching, rocker switch total	■	■	■	■
Switching, rocker switch left/right	■	■	■	■
Dimming, rocker switch total	■	■	■	■
Dimming, rocker switch left/right	■	■	■	■
Blind switch rocker total	■	■	■	■
Blind switch rocker total left/right	■	■	■	■
Short-long operation, switch rocker left/right	■	■	■	■
Value sender rocker switch total	■	■	■	■
Value sender rocker switch left/right	■	■	■	■
Setting the RTC operating mode	■	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■	■
Light scene extension units with light scene memory function	■	■	■	■
Step switch, switch rocker total	■	■	■	■
Step switch, switch rocker left/right	■	■	■	■
Multiple operation, rocker switch left/right	■	■	■	■
Energy saving function	■	■	■	■
Primary function trigger	■	■	■	■
LCD display digital labelling - Chinese/English/Icon	■	■	■	■
LCD display digital labelling - Left/Center/Right	■	■	■	■
LCD display digital labelling - Status / Orientation illumination	■	■	■	■
LCD display labelling colour: red/green/blue/orange/white	■	■	■	■
LCD Sub display configurable: time / PM2.5 / CO ₂ / Humidity / VOC / temperature	–	–	■	■
Room temperature controller only				
Delicated RTC control push button	–	–	–	–
Temperature reading	–	–	–	–
Single/Master/Slave configuration	–	–	–	–
Room Temperature Controller system setting and control	–	–	–	–
Base-load operation	–	–	–	–
Fan coil operation or heating and cooling	–	–	–	–
Variable Refrigerant Flow system control	–	–	–	–
Fresh air system control	–	–	–	–
Three in one RTC controller configuration	–	–	–	–
Additional functions				
5 Logic channels (incl. Priority, Logic gate, Staircase lighting, Delay, Min/max value transducer, Threshold value hysteresis, Light scene actuator)	■	■	■	■
Hospitality occupancy presence detection logic	–	–	–	–
Hospitality courtesy function logic	–	–	–	–
Hospitality room status check logic	–	–	–	–

■ = Function is supported

– = Function is not supported

Program	Yurika		
			
	YUBR/U0.0.1-xxx	YUBR/U4.0.1-xxx	YUA/U1.0.1-xxx
KNX function			
Switching, rocker switch total	■	■	■
Switching, rocker switch left/right	■	■	■
Dimming, rocker switch total	■	■	■
Dimming, rocker switch left/right	■	■	■
Blind switch rocker total	■	■	■
Blind switch rocker total left/right	■	■	■
Short-long operation, switch rocker left/right	■	■	■
Value sender rocker switch total	■	■	■
Value sender rocker switch left/right	■	■	■
Setting the RTC operating mode	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■
Light scene extension units with light scene memory function	■	■	■
Step switch, switch rocker total	■	■	■
Step switch, switch rocker left/right	■	■	■
Multiple operation, rocker switch left/right	■	■	■
Energy saving function	■	■	■
Primary function trigger	■	■	■
LCD display digital labelling - Chinese/English/Icon	■	■	■
LCD display digital labelling - Left/Center/Right	■	■	■
LCD display digital labelling - Status / Orientation illumination	■	■	■
LCD display labelling colour: red/green/blue/orange/white	■	■	■
LCD Sub display configurable: time / PM2.5 / CO ₂ / Humidity / VOC / temperature	■	■	—
Room temperature controller only			
Delicated RTC control push button	■	■	—
Temperature reading	■	■	—
Single/Master/Slave configuration	■	■	—
Room Temperature Controller system setting and control	■	■	—
Base-load operation	■	■	—
Fan coil operation or heating and cooling	■	■	—
Variable Refrigerant Flow system control	■	■	—
Fresh air system control	■	■	—
Three in one RTC controller configuration	■	■	—
Additional functions			
5 Logic channels (incl. Priority, Logic gate, Staircase lighting, Delay, Min/max value transducer, Threshold value hysteresis, Light scene actuator)	■	■	■
Hospitality occupancy presence detection logic	■	■	■
Hospitality courtesy function logic	—	—	■
Hospitality room status check logic	—	—	■

—
 ■ = Function is supported
 — = Function is not supported

PEONIA®

All in one for smarter life

PEONIA® is a highly smart panel integrated with lighting, temperature, electric doors and windows, air conditioning, floor heating, scene and proximity sensors. All these functions make your life smarter and easier than ever.



reddot award 2019
winner





A unique proximity sensor system that can automatically activate the background lights and scenario mode when you are close to the panel. In addition, the in-built sensor can monitor the temperature. Additional information like PM 2.5, VOC and humidity receive from the KNX bus can be displayed. This information can be displayed on the screen directly. When the air quality is bad, the sensor will open the window and air condition system automatically. This brings convenience and comfort to your daily life.

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®



PEBR/U2.0.1-201

PEONIA® Control Element, 2/4-fold with Room Temperature Controller, FM

With integrated bus coupling unit and temperature sensor. Proximity sensor, device locking and energy saving function. Switch contact left/right. Replaceable rocker without icon. Push button function: switching/dimming/blind/value sending/step-type switch/lightscene/ fan function.

With base-load operation.

The controller is a constant room temperature controller for ventilator convectors (fan-coil) in 2 and 4 pipe system and conventional heating and cooling systems.

The fan stage can be switched manually or automatic mode.

Delicated capacitive touch RTC control button with vibration feedback, Single/Master/Slave configuration.

LCD display: Setpoint/actual temperature, Fan speed, Operating state, Operating mode.

Configurable: time, PM2.5, CO₂, Humidity, VOC, temperature, Dynamic animation for dimming, blind, scene.

Individual programmable LED per rocker. Top and bottom ambient LED strip.

LED colour: red/green/yellow/blue/red-orange/violet/white.

Temperature range (device): –5 °C to +45 °C. Dimensions (L x W): 86 mm x 86 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEBR/U2.0.1-002	2TAZ730210R0020		0.212	1
matt White	–	PEBR/U2.0.1-001	2TAZ730210R0010		0.212	1
matt Black	–	PEBR/U2.0.1-201	2TAZ730210R2010		0.212	1
matt Silver	–	PEBR/U2.0.1-131	2TAZ730210R1310		0.212	1
matt Platinum	–	PEBR/U2.0.1-151	2TAZ730210R1510		0.212	1
matt Champagne Gold	–	PEBR/U2.0.1-411	2TAZ730210R4110		0.212	1



PEBR/U3.0.1-201

PEONIA® Control Element 3/6-fold with Room Temperature Controller, FM

With integrated bus coupling unit and temperature sensor.

Proximity sensor, device locking and energy saving function.

Switch contact left/right. Replaceable rocker without icon.

Push button function: switching/dimming/blind/value sending/step-type switch/lightscene/fan function. With base-load operation.

The controller is a constant room temperature controller for ventilator convectors (fan-coil) in 2 and 4 pipe system and conventional heating and cooling systems. The fan stage can be switched manually or automatic mode.

Delicated capacitive touch RTC control button with vibration feedback, Single/Master/Slave configuration.

LCD display: Setpoint/actual temperature, Fan speed, Operating state, Operating mode.

Configurable: time, PM2.5, CO₂, Humidity, VOC, temperature, Dynamic animation for dimming, blind, scene.

Individual programmable LED per rocker. Top and bottom ambient LED strip.

LED colour: red/green/yellow/blue/red-orange/violet/white.

Temperature range (device): -5 °C to +45 °C. Dimensions (L x W): 105 mm x 86 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEBR/U3.0.1-002	2TAZ730310R0020		0.253	1
matt White	–	PEBR/U3.0.1-001	2TAZ730310R0010		0.253	1
matt Black	–	PEBR/U3.0.1-201	2TAZ730310R2010		0.253	1
matt Silver	–	PEBR/U3.0.1-131	2TAZ730310R1310		0.253	1
matt Platinum	–	PEBR/U3.0.1-151	2TAZ730310R1510		0.253	1
matt Champagne Gold	–	PEBR/U3.0.1-411	2TAZ730310R4110		0.253	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®



PEBR/U5.0.1-201

PEONIA® Control Element 5/10-fold with Room Temperature Controller, FM

With integrated bus coupling unit and temperature sensor. Proximity sensor, device locking and energy saving function.

Switch contact left/right. Replaceable rocker without icon.

Push button function: switching/dimming/blind/value sending/step-type switch/ lightscene/ fan function.

With base-load operation. The controller is a constant room temperature controller for ventilator convectors (fan-coil).

In 2 and 4 pipe system and conventional heating and cooling systems. The fan stage can be switched manually or automatic mode.

Dedicated capacitive touch RTC control button with vibration feedback, Single/Master/Slave configuration.

LCD display: Setpoint/actual temperature, Fan speed, Operating state, Operating mode.

Configurable: time, PM2.5, CO₂, Humidity, VOC, temperature, Dynamic animation for dimming, blind, scene.

Individual programmable LED per rocker. Top and bottom ambient LED strip.

LED colour: red/green/yellow/blue/red-orange/violet/white.

Temperature range (device): –5 °C to +45 °C. Dimensions (L x W): 141 mm x 86 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEBR/U5.0.1-002	2TAZ730510R0020		0.284	1
matt White	–	PEBR/U5.0.1-001	2TAZ730510R0010		0.284	1
matt Black	–	PEBR/U5.0.1-201	2TAZ730510R2010		0.284	1
matt Silver	–	PEBR/U5.0.1-131	2TAZ730510R1310		0.284	1
matt Platinum	–	PEBR/U5.0.1-151	2TAZ730510R1510		0.284	1
matt Champagne Gold	–	PEBR/U5.0.1-411	2TAZ730510R4110		0.284	1



PEB/U2.0.1-201

PEONIA® Control Element 2/4-fold, FM

With integrated bus coupling unit and temperature sensor.
 Proximity sensor, device locking and energy saving function.
 Switch contact left/right. Replaceable rocker without icon.
 Push button function: switching/dimming/blind/value sending/step-type switch/lightscene.
 Individual programmable LED per rocker. Top and bottom ambient LED strip.
 LED colour: red/green/yellow/blue/red-orange/violet/white.
 Dimensions (L x W): 86 mm x 86 mm.
 For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEB/U2.0.1-002	2TAZ730200R0020		0.204	1
matt White	–	PEB/U2.0.1-001	2TAZ730200R0010		0.204	1
matt Black	–	PEB/U2.0.1-201	2TAZ730200R2010		0.204	1
matt Silver	–	PEB/U2.0.1-131	2TAZ730200R1310		0.204	1
matt Platinum	–	PEB/U2.0.1-151	2TAZ730200R1510		0.204	1
matt Champagne Gold	–	PEB/U2.0.1-411	2TAZ730200R4110		0.204	1



PEB/U3.0.1-201

PEONIA® Control Element 3/6-fold, FM

With integrated bus coupling unit and temperature sensor.
 Proximity sensor, device locking and energy saving function.
 Switch contact left/right. Replaceable rocker without icon.
 Push button function: switching/dimming/blind/value sending/step-type switch/lightscene.
 Individual programmable LED per rocker. Top and bottom ambient LED strip.
 LED colour: red/green/yellow/blue/red-orange/violet/white.
 Dimensions (L x W): 86 mm x 86 mm.
 For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEB/U3.0.1-002	2TAZ730300R0020		0.205	1
matt White	–	PEB/U3.0.1-001	2TAZ730300R0010		0.205	1
matt Black	–	PEB/U3.0.1-201	2TAZ730300R2010		0.205	1
matt Silver	–	PEB/U3.0.1-131	2TAZ730300R1310		0.205	1
matt Platinum	–	PEB/U3.0.1-151	2TAZ730300R1510		0.205	1
matt Champagne Gold	–	PEB/U3.0.1-411	2TAZ730300R4110		0.205	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®



PEB/U5.0.1-201

PEONIA® Control Element 5/10-fold, FM

With integrated bus coupling unit and temperature sensor.
Proximity sensor, device locking and energy saving function.
Switch contact left/right. Replaceable rocker without icon.
Push button function: switching/dimming/blind/value sending/step-type switch/lightscene.
Individual programmable LED per rocker. Top and bottom ambient LED strip.
LED colour: red/green/yellow/blue/red-orange/violet/white.
Dimensions (L x W): 144 mm x 86 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEB/U5.0.1-002	2TAZ730500R0020		0.275	1
matt White	–	PEB/U5.0.1-001	2TAZ730500R0010		0.275	1
matt Black	–	PEB/U5.0.1-201	2TAZ730500R2010		0.275	1
matt Silver	–	PEB/U5.0.1-131	2TAZ730500R1310		0.275	1
matt Platinum	–	PEB/U5.0.1-151	2TAZ730500R1510		0.275	1
matt Champagne Gold	–	PEB/U5.0.1-411	2TAZ730500R4110		0.275	1



PESX/2.10.1-201

Replaceable rocker without icon for PEONIA® Control Element, PEB/U2.0.1-xxx

Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESX/2.10.1-002	2TAZ730000R0020		0.087	1
matt White	–	PESX/2.10.1-001	2TAZ730000R0010		0.087	1
matt Black	–	PESX/2.10.1-201	2TAZ730000R2010		0.087	1
matt Silver	–	PESX/2.10.1-131	2TAZ730000R1310		0.087	1
matt Platinum	–	PESX/2.10.1-151	2TAZ730000R1510		0.087	1
matt Champagne Gold	–	PESX/2.10.1-411	2TAZ730000R4110		0.087	1



PESB/2.10.1-201

Replaceable rocker with lighting icon for PEONIA® Control Element, PEB/U2.0.1-xxx

Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESB/2.10.1-002	2TAZ730000R0021		0.087	1
matt White	–	PESB/2.10.1-001	2TAZ730000R0011		0.087	1
matt Black	–	PESB/2.10.1-201	2TAZ730000R2011		0.087	1
matt Silver	–	PESB/2.10.1-131	2TAZ730000R1311		0.087	1
matt Platinum	–	PESB/2.10.1-151	2TAZ730000R1511		0.087	1
matt Champagne Gold	–	PESB/2.10.1-411	2TAZ730000R4111		0.087	1



PESD/2.10.1-201

Replaceable rocker with dimming icon for PEONIA® Control Element, PEB/U2.0.1-xxx

Dimensions (L x W): 43 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESD/2.10.1-002	2TAZ730000R0024		0.087	1
matt White	–	PESD/2.10.1-001	2TAZ730000R0014		0.087	1
matt Black	–	PESD/2.10.1-201	2TAZ730000R2014		0.087	1
matt Silver	–	PESD/2.10.1-131	2TAZ730000R1314		0.087	1
matt Platinum	–	PESD/2.10.1-151	2TAZ730000R1514		0.087	1
matt Champagne Gold	–	PESD/2.10.1-411	2TAZ730000R4114		0.087	1



PESJ/2.10.1-201

Replaceable rocker with blind icon for PEONIA® Control Element, PEB/U2.0.1-xxx

Dimensions (L x W): 43 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESJ/2.10.1-002	2TAZ730000R0023		0.087	1
matt White	–	PESJ/2.10.1-001	2TAZ730000R0013		0.087	1
matt Black	–	PESJ/2.10.1-201	2TAZ730000R2013		0.087	1
matt Silver	–	PESJ/2.10.1-131	2TAZ730000R1313		0.087	1
matt Platinum	–	PESJ/2.10.1-151	2TAZ730000R1513		0.087	1
matt Champagne Gold	–	PESJ/2.10.1-411	2TAZ730000R4113		0.087	1



PESR/2.10.1-201

Replaceable rocker with temperature icon for PEONIA® Control Element, PEB/U2.0.1-xxx

Dimensions (L x W): 43 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESR/2.10.1-002	2TAZ730000R0022		0.087	1
matt White	–	PESR/2.10.1-001	2TAZ730000R0012		0.087	1
matt Black	–	PESR/2.10.1-201	2TAZ730000R2012		0.087	1
matt Silver	–	PESR/2.10.1-131	2TAZ730000R1312		0.087	1
matt Platinum	–	PESR/2.10.1-151	2TAZ730000R1512		0.087	1
matt Champagne Gold	–	PESR/2.10.1-411	2TAZ730000R4112		0.087	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®



PESF/2.10.1-201

Replaceable rocker with fan icon for PEONIA® Control Element, PEB/U2.0.1-xxx

Dimensions (L x W): 43 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESF/2.10.1-002	2TAZ730000R0025		0.087	1
matt White	–	PESF/2.10.1-001	2TAZ730000R0015		0.087	1
matt Black	–	PESF/2.10.1-201	2TAZ730000R2015		0.087	1
matt Silver	–	PESF/2.10.1-131	2TAZ730000R1315		0.087	1
matt Platinum	–	PESF/2.10.1-151	2TAZ730000R1515		0.087	1
matt Champagne Gold	–	PESF/2.10.1-411	2TAZ730000R4115		0.087	1



PESZ/2.10.1-201

Replaceable rocker with scene icon for PEONIA® Control Element, PEB/U2.0.1-xxx

Dimensions (L x W): 43 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESZ/2.10.1-002	2TAZ730000R0026		0.087	1
matt White	–	PESZ/2.10.1-001	2TAZ730000R0016		0.087	1
matt Black	–	PESZ/2.10.1-201	2TAZ730000R2016		0.087	1
matt Silver	–	PESZ/2.10.1-131	2TAZ730000R1316		0.087	1
matt Platinum	–	PESZ/2.10.1-151	2TAZ730000R1516		0.087	1
matt Champagne Gold	–	PESZ/2.10.1-411	2TAZ730000R4116		0.087	1



PESX/35.10.1-201

Replaceable rocker without icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx

Dimensions (L x W): 29 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESX/35.10.1-002	2TAZ730001R0020		0.074	1
matt White	–	PESX/35.10.1-001	2TAZ730001R0010		0.074	1
matt Black	–	PESX/35.10.1-201	2TAZ730001R2010		0.074	1
matt Silver	–	PESX/35.10.1-131	2TAZ730001R1310		0.074	1
matt Platinum	–	PESX/35.10.1-151	2TAZ730001R1510		0.074	1
matt Champagne Gold	–	PESX/35.10.1-411	2TAZ730001R4110		0.074	1



PESB/35.10.1-201

**Replaceable rocker with lighting icon for PEONIA® Control Element,
PEB/U3.0.1-xxx, PEB/U5.0.1-xxx**

Dimensions (L x W): 29 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESB/35.10.1-002	2TAZ730001R0021		0.074	1
matt White	–	PESB/35.10.1-001	2TAZ730001R0011		0.074	1
matt Black	–	PESB/35.10.1-201	2TAZ730001R2011		0.074	1
matt Silver	–	PESB/35.10.1-131	2TAZ730001R1311		0.074	1
matt Platinum	–	PESB/35.10.1-151	2TAZ730001R1511		0.074	1
matt Champagne Gold	–	PESB/35.10.1-411	2TAZ730001R4111		0.074	1



PESD/35.10.1-201

**Replaceable rocker with dimming icon for PEONIA® Control Element,
PEB/U3.0.1-xxx, PEB/U5.0.1-xxx**

Dimensions (L x W): 29 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESD/35.10.1-002	2TAZ730001R0024		0.074	1
matt White	–	PESD/35.10.1-001	2TAZ730001R0014		0.074	1
matt Black	–	PESD/35.10.1-201	2TAZ730001R2014		0.074	1
matt Silver	–	PESD/35.10.1-131	2TAZ730001R1314		0.074	1
matt Platinum	–	PESD/35.10.1-151	2TAZ730001R1514		0.074	1
matt Champagne Gold	–	PESD/35.10.1-411	2TAZ730001R4114		0.074	1



PESJ/35.10.1-201

**Replaceable rocker with blind icon for PEONIA® Control Element,
PEB/U3.0.1-xxx, PEB/U5.0.1-xxx**

Dimensions (L x W): 29 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESJ/35.10.1-002	2TAZ730001R0023		0.074	1
matt White	–	PESJ/35.10.1-001	2TAZ730001R0013		0.074	1
matt Black	–	PESJ/35.10.1-201	2TAZ730001R2013		0.074	1
matt Silver	–	PESJ/35.10.1-131	2TAZ730001R1313		0.074	1
matt Platinum	–	PESJ/35.10.1-151	2TAZ730001R1513		0.074	1
matt Champagne Gold	–	PESJ/35.10.1-411	2TAZ730001R4113		0.074	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®



PESR/35.10.1-201

Replaceable rocker with temperature icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx

Dimensions (L x W): 29 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESR/35.10.1-002	2TAZ730001R0022		0.074	1
matt White	–	PESR/35.10.1-001	2TAZ730001R0012		0.074	1
matt Black	–	PESR/35.10.1-201	2TAZ730001R2012		0.074	1
matt Silver	–	PESR/35.10.1-131	2TAZ730001R1312		0.074	1
matt Platinum	–	PESR/35.10.1-151	2TAZ730001R1512		0.074	1
matt Champagne Gold	–	PESR/35.10.1-411	2TAZ730001R4112		0.074	1



PESF/35.10.1-201

Replaceable rocker with fan icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx

Dimensions (L x W): 29 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESF/35.10.1-002	2TAZ730001R0025		0.074	1
matt White	–	PESF/35.10.1-001	2TAZ730001R0015		0.074	1
matt Black	–	PESF/35.10.1-201	2TAZ730001R2015		0.074	1
matt Silver	–	PESF/35.10.1-131	2TAZ730001R1315		0.074	1
matt Platinum	–	PESF/35.10.1-151	2TAZ730001R1515		0.074	1
matt Champagne Gold	–	PESF/35.10.1-411	2TAZ730001R4115		0.074	1



PESZ/35.10.1-201

Replaceable rocker with scene icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx

Dimensions (L x W): 29 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESZ/35.10.1-002	2TAZ730001R0026		0.074	1
matt White	–	PESZ/35.10.1-001	2TAZ730001R0016		0.074	1
matt Black	–	PESZ/35.10.1-201	2TAZ730001R2016		0.074	1
matt Silver	–	PESZ/35.10.1-131	2TAZ730001R1316		0.074	1
matt Platinum	–	PESZ/35.10.1-151	2TAZ730001R1516		0.074	1
matt Champagne Gold	–	PESZ/35.10.1-411	2TAZ730001R4116		0.074	1



PESX/235.10.1-201

Replaceable rocker without icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx

Dimensions (L x W): 18 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESX/235.10.1-002	2TAZ730010R0020		0.065	1
matt White	–	PESX/235.10.1-001	2TAZ730010R0010		0.065	1
matt Black	–	PESX/235.10.1-201	2TAZ730010R2010		0.065	1
matt Silver	–	PESX/235.10.1-131	2TAZ730010R1310		0.065	1
matt Platinum	–	PESX/235.10.1-151	2TAZ730010R1510		0.065	1
matt Champagne Gold	–	PESX/235.10.1-411	2TAZ730010R4110		0.065	1



PESB/235.10.1-201

Replaceable rocker with lighting icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx

Dimensions (L x W): 18 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESB/235.10.1-002	2TAZ730010R0021		0.065	1
matt White	–	PESB/235.10.1-001	2TAZ730010R0011		0.065	1
matt Black	–	PESB/235.10.1-201	2TAZ730010R2011		0.065	1
matt Silver	–	PESB/235.10.1-131	2TAZ730010R1311		0.065	1
matt Platinum	–	PESB/235.10.1-151	2TAZ730010R1511		0.065	1
matt Champagne Gold	–	PESB/235.10.1-411	2TAZ730010R4111		0.065	1



PESD/235.10.1-201

Replaceable rocker with dimming icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx

Dimensions (L x W): 18 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESD/235.10.1-002	2TAZ730010R0024		0.065	1
matt White	–	PESD/235.10.1-001	2TAZ730010R0014		0.065	1
matt Black	–	PESD/235.10.1-201	2TAZ730010R2014		0.065	1
matt Silver	–	PESD/235.10.1-131	2TAZ730010R1314		0.065	1
matt Platinum	–	PESD/235.10.1-151	2TAZ730010R1514		0.065	1
matt Champagne Gold	–	PESD/235.10.1-411	2TAZ730010R4114		0.065	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®



PESJ/235.10.1-201

Replaceable rocker with blind icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx

Dimensions (L x W): 18 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESJ/235.10.1-002	2TAZ730010R0023		0.065	1
matt White	–	PESJ/235.10.1-001	2TAZ730010R0013		0.065	1
matt Black	–	PESJ/235.10.1-201	2TAZ730010R2013		0.065	1
matt Silver	–	PESJ/235.10.1-131	2TAZ730010R1313		0.065	1
matt Platinum	–	PESJ/235.10.1-151	2TAZ730010R1513		0.065	1
matt Champagne Gold	–	PESJ/235.10.1-411	2TAZ730010R4113		0.065	1



PESR/235.10.1-201

Replaceable rocker with temperature icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx

Dimensions (L x W): 18 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESR/235.10.1-002	2TAZ730010R0022		0.065	1
matt White	–	PESR/235.10.1-001	2TAZ730010R0012		0.065	1
matt Black	–	PESR/235.10.1-201	2TAZ730010R2012		0.065	1
matt Silver	–	PESR/235.10.1-131	2TAZ730010R1312		0.065	1
matt Platinum	–	PESR/235.10.1-151	2TAZ730010R1512		0.065	1
matt Champagne Gold	–	PESR/235.10.1-411	2TAZ730010R4112		0.065	1



PESF/235.10.1-201

Replaceable rocker with fan icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx

Dimensions (L x W): 18 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESF/235.10.1-002	2TAZ730010R0025		0.065	1
matt White	–	PESF/235.10.1-001	2TAZ730010R0015		0.065	1
matt Black	–	PESF/235.10.1-201	2TAZ730010R2015		0.065	1
matt Silver	–	PESF/235.10.1-131	2TAZ730010R1315		0.065	1
matt Platinum	–	PESF/235.10.1-151	2TAZ730010R1515		0.065	1
matt Champagne Gold	–	PESF/235.10.1-411	2TAZ730010R4115		0.065	1



PESZ/235.10.1-201

Replaceable rocker with scene icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx

Dimensions (L x W): 18 mm x 78 mm.

For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESZ/235.10.1-002	2TAZ730010R0026		0.065	1
matt White	–	PESZ/235.10.1-001	2TAZ730010R0016		0.065	1
matt Black	–	PESZ/235.10.1-201	2TAZ730010R2016		0.065	1
matt Silver	–	PESZ/235.10.1-131	2TAZ730010R1316		0.065	1
matt Platinum	–	PESZ/235.10.1-151	2TAZ730010R1516		0.065	1
matt Champagne Gold	–	PESZ/235.10.1-411	2TAZ730010R4116		0.065	1

Yurika

Versatile, Ingenious in one



The ABB Yurika control element portfolio is a solution built on the open KNX standard, perfectly suited for residential, commercial and hospitality environments.

With a people-oriented design experience in mind, the control element looks simple yet is assembled with a combination of LCD screen with physical push buttons to give the user an intuitive operating experience. The control element can be used for various control functions such as lighting, air conditioning, floor heating, electric doors, blinds, and scenes, etc. At the same time, the flexible configuration and display of digital labels furthermore provide good features that can benefit customers in terms of cost and operation.



ABB i-bus® KNX

User Operation – Design Ranges – Yurika



YUB/U1.0.1-001

Control Element, 1/2-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.

Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	YUB/U1.0.1-001	2TYZ120001R0600			1
silver	–	YUB/U1.0.1-131	2TYZ120001R0300			1
champagne gold	–	YUB/U1.0.1-411	2TYZ120001R0500			1
matt black	–	YUB/U1.0.1-201	2TYZ120001R1000			1
stainless steel	NEW –	YUB/U1.0.1-SS	2TYZ120001R0700			1
antique gold	NEW –	YUB/U1.0.1-AG	2TYZ120001R0900			1
mocha brown	NEW –	YUB/U1.0.1-MB	2TYZ120001R0800			1



YUB/U2.0.1-001

Control Element, 2/4-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.

Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	YUB/U2.0.1-001	2TYZ120002R0600			1
silver	–	YUB/U2.0.1-131	2TYZ120002R0300			1
champagne gold	–	YUB/U2.0.1-411	2TYZ120002R0500			1
matt black	–	YUB/U2.0.1-201	2TYZ120002R1000			1
stainless steel	NEW –	YUB/U2.0.1-SS	2TYZ120002R0700			1
antique gold	NEW –	YUB/U2.0.1-AG	2TYZ120002R0900			1
mocha brown	NEW –	YUB/U2.0.1-MB	2TYZ120002R0800			1

ABB i-bus® KNX

User Operation – Design Ranges – Yurika



YUB/U3.0.1-001

Control Element, 3/6-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.

Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	YUB/U3.0.1-001	2TYZ120003R0600			1
silver	–	YUB/U3.0.1-131	2TYZ120003R0300			1
champagne gold	–	YUB/U3.0.1-411	2TYZ120003R0500			1
matt black	–	YUB/U3.0.1-201	2TYZ120003R1000			1
stainless steel	–	YUB/U3.0.1-SS	2TYZ120003R0700			1
antique gold	–	YUB/U3.0.1-AG	2TYZ120003R0900			1
mocha brown	–	YUB/U3.0.1-MB	2TYZ120003R0800			1



YUB/U4.0.1-001

Control Element, 4/8-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white. LCD Sub display configurable: time, PM2.5, CO₂, Humidity, VOC, temperature. Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	YUB/U4.0.1-001	2TYZ120004R0600			1
silver	–	YUB/U4.0.1-131	2TYZ120004R0300			1
champagne gold	–	YUB/U4.0.1-411	2TYZ120004R0500			1
matt black	–	YUB/U4.0.1-201	2TYZ120004R1000			1
stainless steel	–	YUB/U4.0.1-SS	2TYZ120004R0700			1
antique gold	–	YUB/U4.0.1-AG	2TYZ120004R0900			1
mocha brown	–	YUB/U4.0.1-MB	2TYZ120004R0800			1



YUBR/U0.0.1-001

Room Temperature Controller, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. With base-load operation. The controller is a room temperature controller suitable for ventilator convectors (fan-coil) in 2 and 4 pipe system heating and cooling systems, Variable Refrigerant Flow system (VRF/VRV), Floor heating system and Fresh air system. Fan stage adjustable from the controller. Deliciated RTC control button for easy access, can operate in Single/Master/Slave configuration. LCD display RTC: Setpoint/actual temperature, Fan speed, Operating state, Operating mode. LCD Sub display configurable: time, PM2.5, CO₂, Humidity, VOC, temperature. Temperature range (device): -5 °C to +45 °C. Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	YUBR/U0.0.1-001	2TYZ120102R0600			1
silver	–	YUBR/U0.0.1-131	2TYZ120102R0300			1
champagne gold	–	YUBR/U0.0.1-411	2TYZ120102R0500			1
matt black	–	YUBR/U0.0.1-201	2TYZ120102R1000			1
stainless steel	–	YUBR/U0.0.1-SS	2TYZ120102R0700			1
antique gold	–	YUBR/U0.0.1-AG	2TYZ120102R0900			1
mocha brown	–	YUBR/U0.0.1-MB	2TYZ120102R0800			1



YUBR/U4.0.1-001

Room Temperature Controller with 2/4-fold Control Element, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. With base-load operation. The controller is a room temperature controller suitable for ventilator convectors (fan-coil) in 2 and 4 pipe system heating and cooling systems, Variable Refrigerant Flow system (VRF/VRV), Floor heating system and Fresh air system. Fan stage adjustable from the controller. Deliciated RTC control button for easy access, can operate in Single/Master/Slave configuration. LCD display RTC: Setpoint/actual temperature, Fan speed, Operating state, Operating mode. LCD Sub display configurable: time, PM2.5, CO₂, Humidity, VOC, temperature. LCD display labelling colour: red/green/blue/orange/white. Temperature range (device): -5 °C to +45 °C. Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	YUBR/U4.0.1-001	2TYZ120104R0600			1
silver	–	YUBR/U4.0.1-131	2TYZ120104R0300			1
champagne gold	–	YUBR/U4.0.1-411	2TYZ120104R0500			1
matt black	–	YUBR/U4.0.1-201	2TYZ120104R1000			1
stainless steel	–	YUBR/U4.0.1-SS	2TYZ120104R0700			1
antique gold	–	YUBR/U4.0.1-AG	2TYZ120104R0900			1
mocha brown	–	YUBR/U4.0.1-MB	2TYZ120104R0800			1

ABB i-bus® KNX

User Operation – Design Ranges – Yurika



YUA/U1.0.1-001

Room Outside Panel, 1/2-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with push button function. Hospitality room outside display panel with integrated occupancy presence detection, courtesy function and room status checking logic function. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.

Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
white	–	YUA/U1.0.1-001	2TYZ120001R0601			1
silver	–	YUA/U1.0.1-131	2TYZ120101R0301			1
champagne gold	–	YUA/U1.0.1-411	2TYZ120001R0501			1
matt black	–	YUA/U1.0.1-201	2TYZ120001R1001			1
stainless steel	–	YUA/U1.0.1-SS	2TYZ120001R0701			1
antique gold	–	YUA/U1.0.1-AG	2TYZ120001R0901			1
mocha brown	–	YUA/U1.0.1-MB	2TYZ120001R0801			1

Notes

ABB tacteo®


A smart sensor for everything




The extra-flat KNX sensor fits into any environment

Flat and theft-proof

The frameless and extra-flat KNX sensor with a diameter of 9.5 mm sits almost flush with the wall and blends harmoniously into any wall design. Peace of mind is provided by the optional removal guard, which protects the KNX sensor from theft.

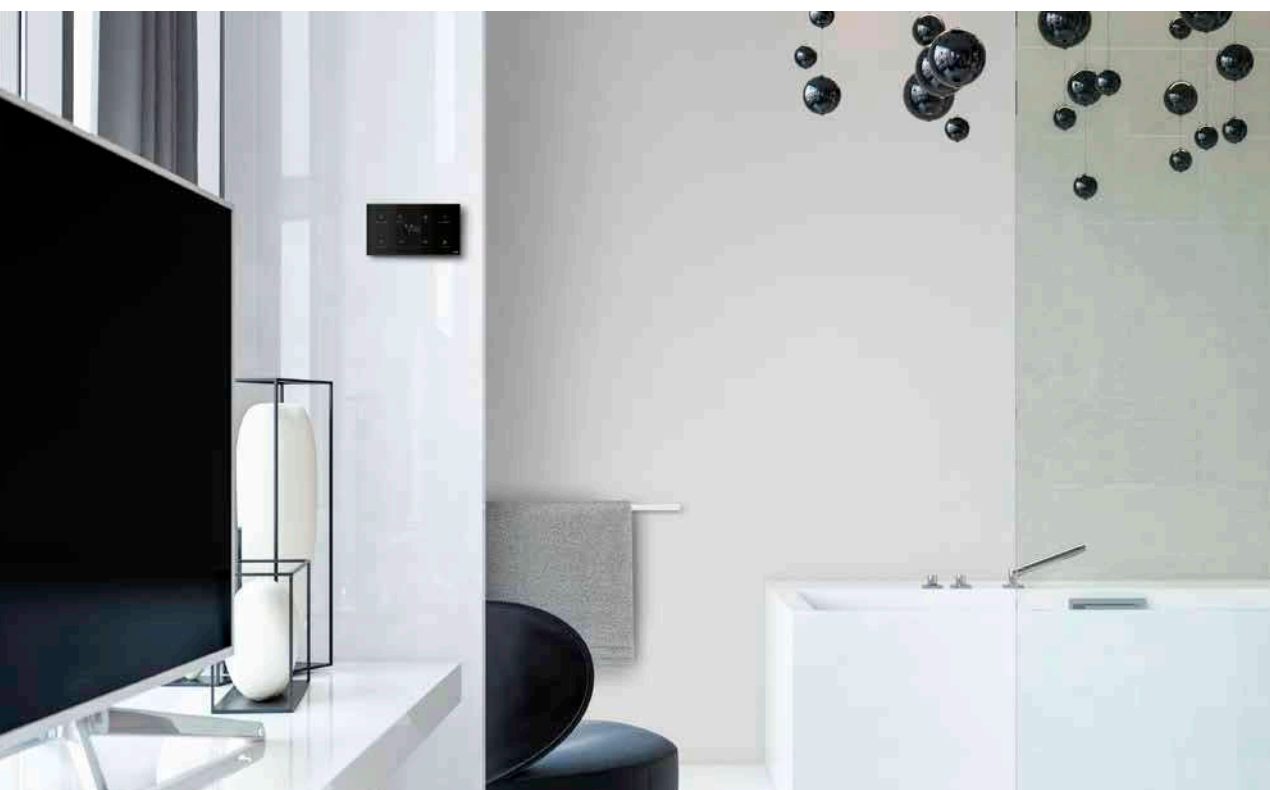



Secure access control for the hospitality industry

Hotel access control

The ABB tacteo® KNX range offers secure access control for the hospitality industry. It is particularly practical that the sensor performs all of a hotel's management tasks, which can be controlled from a central point such as the reception desk.



The capacitive glass sensors react without contact

Intuitive operation

The capacitive KNX glass sensors react without any touch or contact. When moving your hand towards the sensor, the status lighting switches on automatically. On the other hand, touching the sensor with the entire palm of your hand triggers a preprogrammed function – such as “switching on the light”. With a tap of the finger the desired function can be activated. Easy operation is also ensured by the tried-and-tested colour control concept.

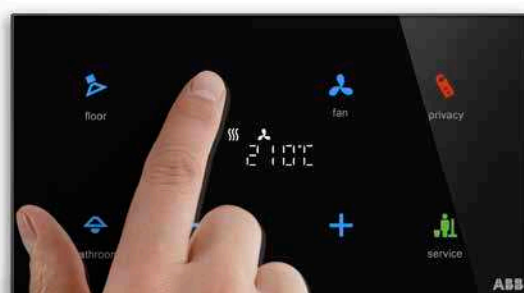


ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

Touch Control Element with Bus Coupler, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal.



TB/U1.1.1-CG

1-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U1.1.1-CG	2CKA006300A1538		86x86	1
Premium customization ¹⁾	Go to configurator	TB/U1-CG	2CKA006300A1641		86x86	1



TB/U2.4.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U2.4.1-CG	2CKA006300A1539		86x86	1
Premium customization ¹⁾	Go to configurator	TB/U2-CG	2CKA006300A1642		86x86	1



TB/U2.5.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U2.5.1-CG	2CKA006300A1540		86x86	1
Premium customization ¹⁾	Go to configurator	TB/U2-CG	2CKA006300A1642		86x86	1



TB/U4.4.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U4.4.1-CG	2CKA006300A1541		86x86	1
Premium customization ¹⁾	Go to configurator	TB/U4-CG	2CKA006300A1643		86x86	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>



TB/U4.5.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U4.5.1-CG	2CKA006300A1612		86x86	1
Premium customization ¹⁾	Go to configurator	TB/U4-CG	2CKA006300A1643		86x86	1



TB/U6.4.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U6.4.1-CG	2CKA006300A1542		86x86	1
Premium customization ¹⁾	Go to configurator	TB/U6-CG	2CKA006300A1644		86x86	1



TB/U6.5.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U6.5.1-CG	2CKA006300A1602		86x86	1
Premium customization ¹⁾	Go to configurator	TB/U6-CG	2CKA006300A1644		86x86	1



TB/U12.7.1-CG

12-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U12.7.1-CG	2CKA006300A1543		86x157	1
Premium customization ¹⁾	Go to configurator	TB/U12-CG	2CKA006300A1645		86x157	1



TB/U12.8.1-CG

12-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U12.8.1-CG	2CKA006300A1544		157x86	1
Premium customization ¹⁾	Go to configurator	TB/U12-CG	2CKA006300A1645		157x86	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®



TBR/U4.7.1-CG



TBR/U4.8.1-CG



TR/U.1.1-CG

Touch Control Element with Room Temperature Controller and Bus Coupler, 4-fold, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TBR/U4.7.1-CG	2CKA006300A1545	€	86x157	1
Premium customization ¹⁾	Go to configurator	TBR/U4-CG	2CKA006300A1648	€	86x157	1
Standard customization ¹⁾	Go to configurator	TBR/U4.8.1-CG	2CKA006300A1546	€	157x86	1
Premium customization ¹⁾	Go to configurator	TBR/U4-CG	2CKA006300A1648	€	157x86	1

Touch Room Temperature Controller with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TR/U.1.1-CG	2CKA006300A1547	€	86x86	1
Premium customization ¹⁾	Go to configurator	TR/U-CG	2CKA006300A1647	€	86x86	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>



TBW/U.1.1-CG

Busch-Watchdog® 180 Sensor Standard with Bus Coupler, FM

Ordering possible only in connection with the design ID. Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated temperature sensor. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TBW/U.1.1-CG	2CKA006300A1548	€	86x86	1
Premium customization ¹⁾	Go to configurator	TBW/U-CG	2CKA006300A1654	€	86x86	1



TA/U3.1.1-CG

Room Outdoor Sensor with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function "Do not disturb", "Bell" and "Make up room". Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. The bus connection is provided via the enclosed bus terminal.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TA/U3.1.1-CG	2CKA006300A1549	€	86x86	1
Premium customization ¹⁾	Go to configurator	TA/U3-CG	2CKA006300A1646	€	86x86	1



TSN/U.2.1-CG

Room Outdoor Sensor with Room Number and Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function "Do not disturb", "Bell" and "Make up room". With backlit room number. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal. The device requires a 12...24 V AC/DC external power supply to ensure its operation even with bus voltage failure.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TSN/U.2.1-CG	2CKA006300A1603	€	86x157	1
Premium customization ^{1) 2)}	Go to configurator	TSN/U-CG	2CKA006300A1653	€	86x157	1

¹⁾ The individual design can be selected via the website:


URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

Touch Control Element with Bus Coupler, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal.



TB/U1.3.1-CG

1-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U1.3.1-CG	2CKA006300A1590		115x86	1
Premium customization ^{1) 2)}	Go to configurator	TB/U1-CG	2CKA006300A1641		115x86	1



TB/U2.8.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U2.8.1-CG	2CKA006300A1579		115x86	1
Premium customization ^{1) 2)}	Go to configurator	TB/U2-CG	2CKA006300A1642		115x86	1



TB/U4.8.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U4.8.1-CG	2CKA006300A1593		115x86	1
Premium customization ^{1) 2)}	Go to configurator	TB/U4-CG	2CKA006300A1643		115x86	1



TB/U6.8.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit pc.
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U6.8.1-CG	2CKA006300A1594		115x86	1
Premium customization ^{1) 2)}	Go to configurator	TB/U6-CG	2CKA006300A1644		115x86	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>



TR/U.3.1-CG

Touch Room Temperature Controller with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Control element with room thermostat function for controlling TSA/K 230.1, TSA/K 24.1 in connection with KNX-Heating actuator, commercially available valve drives or analogue valve drives (continuous controllers). The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TR/U.3.1-CG	2CKA006300A1595	€	115x86	1
Premium customization ^{1) 2)}	Go to configurator	TR/U-CG	2CKA006300A1647	€	115x86	1



TBW/U.3.1-CG

Busch-Watchdog® 180 Sensor Standard with Bus Coupler, FM

Ordering possible only in connection with the design ID. Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated temperature sensor. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TBW/U.3.1-CG	2CKA006300A1596	€	115x86	1
Premium customization ^{1) 2)}	Go to configurator	TBW/U-CG	2CKA006300A1654	€	115x86	1



TA/U3.3.1-CG

Room Outdoor Sensor with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function "Do not disturb", "Bell" and "Make up room". Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. The bus connection is provided via the enclosed bus terminal.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TA/U3.3.1-CG	2CKA006300A1597	€	115x86	1
Premium customization ^{1) 2)}	Go to configurator	TA/U3-CG	2CKA006300A1646	€	115x86	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

Touch Control Element with Bus Coupler, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal.



TB/U1.2.1-CG

1-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U1.2.1-CG	2CKA006300A1578	€	86x115	1
Premium customization ^{1) 2)}	Go to configurator	TB/U1-CG	2CKA006300A1641	€	86x115	1



TB/U2.7.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U2.7.1-CG	2CKA006300A1580	€	86x115	1
Premium customization ^{1) 2)}	Go to configurator	TB/U2-CG	2CKA006300A1642	€	86x115	1



TB/U4.7.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U4.7.1-CG	2CKA006300A1581	€	86x115	1
Premium customization ^{1) 2)}	Go to configurator	TB/U4-CG	2CKA006300A1643	€	86x115	1



TB/U6.7.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TB/U6.7.1-CG	2CKA006300A1582	€	86x115	1
Premium customization ^{1) 2)}	Go to configurator	TB/U6-CG	2CKA006300A1644	€	86x115	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>



TR/U.2.1-CG

Touch Room Temperature Controller with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Control element with room thermostat function for controlling TSA/K 230.1, TSA/K 24.1 in connection with KNX-Heating actuator, commercially available valve drives or analogue valve drives (continuous controllers). The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TR/U.2.1-CG	2CKA006300A1583	€	86x115	1
Premium customization ^{1) 2)}	Go to configurator	TR/U-CG	2CKA006300A1647	€	86x115	1



TBW/U.2.1-CG

Busch-Watchdog® 180 Sensor Standard with Bus Coupler, FM

Ordering possible only in connection with the design ID. Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated temperature sensor. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TBW/U.2.1-CG	2CKA006300A1584	€	86x115	1
Premium customization ^{1) 2)}	Go to configurator	TBW/U-CG	2CKA006300A1654	€	86x115	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®



TA/U3.2.1-CG

Room Outdoor Sensor with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function "Do not disturb", "Bell" and "Make up room". Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. The bus connection is provided via the enclosed bus terminal. The device is mounted exclusively via the Italian flush-mounted device box according to EN60670 (CEI 23-48).

Description	Standard Design ID	Order details		Price 1 piece	Dimensions mm	Pack unit
		Type code	Order code			
Standard customization ¹⁾	Go to configurator	TA/U3.2.1-CG	2CKA006300A1585	€	86x115	1
Premium customization ^{1) 2)}	Go to configurator	TA/U3-CG	2CKA006300A1646	€	86x115	1

¹⁾ The individual design can be selected via the website:

URL: <https://tacteo-configurator.eu.mybuildings.abb.com/>



TZW/U.0.1.CK

Removal protection tool

Tools for the removal of a device with installed removal protection TZE/U.0.11.CK. Installation is carried out on the flush-mounted insert of the device.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZW/U.0.1.CK	2CKA006300A1611			



TZE/U.0.1.CK

Removal protection for Control Elements

Prevents the disassembly of ABB Tenton® and Busch tacteo® control elements, room temperature controllers, external room sensors and movement detectors.

The tool with the mounted removal protection is disassembled using mounting tool TZW/U.x.x-CK.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZE/U.0.1.CK	2CKA006300A1633			



TZE/U.0.2.CK

Removal protection for access control devices for squared, horizontal and room number glass versions

Prevents the disassembly of ABB tacteo® card holders, card readers and external room sensors with/without card readers and room numbers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZE/U.0.2.CK	2CSY245271S3601			



TZE/U.0.3.CK

Removal protection for access control devices for vertical glass versions


Prevents the dismantling of ABB tacteo® card holders, card readers and external room sensors with/without card readers and room numbers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZE/U.0.3.CK	2CSY233741S3611			

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®


Busch-priOn® allows you to control and monitor functions for the entire room. Light, scenes, timer, blind control unit, heating control unit – all functions are controlled simply and intuitively via a rotary dial, and freely programmable functions can be called up via the rocker switches. Busch-priOn® is a non-fixed, modular concept.



Colours that make life easier.

A consistent colour coding concept and durable LED technology make Busch-priOn® extremely easy to operate. The dial lights up in the colours of the coding system, thus providing feedback on the function currently selected. Yellow stands for lighting, blue for the blind control unit, magenta for light scenes and orange for the heating control unit. These colours are also found on the rocker switches of the control element panels.

01



The rotary control element is equipped with a freely programmable button which can be pressed and turned. It can be used to switch and dim individual lamps, but also to switch on whole groups of lamps with one press of a button and vary their brightness continuously via the dial.

Function

Dimming | Blinds | Value | Light scenes | Logic functions | Time functions

Features

Illuminated dial | Colour coding concept | Anti-theft protection | Day/night operation

02



The single control element is equipped with a freely programmable “large” operating button. It can be assigned to one topic and can carry out a maximum of two commands.


Function

Switching | Dimming | Blinds | Value | Buttons | Light scenes | Logic functions | Time functions

Features

Illuminated rocker switch | Colour coding concept | Freely programmable control button | Anti-theft protection | Replaceable labelling symbol (Fig. shows Lighting labelling symbol)

03



The triple control element is equipped with 3 freely programmable control buttons. Each can be assigned to one topic and can carry out a maximum of two commands.

Function

Switching | Dimming | Blinds | Value | Buttons | Light scenes | Logic functions | Time functions

Features

Illuminated rocker switches | Colour coding concept | Freely programmable control buttons | Anti-theft protection | Replaceable labelling symbol (Fig. shows labelling symbols Lighting, Blinds and Scene)



reddot design award
best of the best 2008

Busch-priOn® received special commendment in the category “best of the best,” winning the “red dot award: communication design 2008” for its interface design.

01 Rotary control element

02 1 gang control element

03 3 gang control element

01



A single-line display with integrated room temperature controller has been designed for the Busch-priOn® 3 gang control element, technically reduced to the basics and optically elegant. It is particularly easy to read due to the monochromatic design for white on black information. The room temperature controller, information function like time and date, up to 17 freely programmable text displays, IR sensor and proximity sensor have been integrated into the display. The design of the display is available in the colour and material "glass black" only.

02



Busch-priOn® is ideal in combination with the carat® switch series, which has surfaces in the same design.

03



The Busch-priOn® flush-mounted movement sensor can be used individually or with other Busch-priOn® modules. Practical because users thus do not have to look for the light switch and are greeted with light when first entering a dark room.

01 3 gang control element with single-line display and temperature controller

02 carat® glass black

03 Flush-mounted movement sensor

ABB i-bus® KNX

User Operation – Design Ranges – Planning aid for Busch-priOn®

End strips without function

studio white,
Article-No. 6348-24G-101-500

glass black,
Article-No. 6348-825-101-500

white glass,
Article-No. 6348-811-101-500

stainless steel,
Article-No. 6348-860-101-500

Support frame, bus coupler



Bus coupler Busch-priOn®,
Article-No. 6120/12-101



1 gang,
Article-No.
6346/10-101-500

Note:

This power adaptor
can supply up to 15
power bus couplers
with current.



Power adaptor
REG,
Article-No.
CP-D 24/2.5



Bus coupler Busch-priOn®,
Article-No. 6120/13-500



2 gang,
Article-No.
6346/11-101-500



3 gang,
Article-No.
6346/12-101-500

End strip



Commissioning adaptor,
Article-No. 6149/21-500

End strips without function

studio white,
Article-No. 6349-24G-101-500

white glass,
Article-No. 6349-811-101-500

glass black,
Article-No. 6349-825-101-500

stainless steel,
Article-No. 6349-860-101-500

End strip with IR proximity function


glass black,
Article-No.
6350-825-101-500

Note:
only combinable
with 3 gang control
element


Single-line
display and room
thermostat,
Article-No.
6351-825-101-500


Control element,
1 gang,
Article-No.
6340-825-101-500


Control element,
3 gang, Article-No.
6342-825-101-500


Rotary control
element, 1 gang,
Article-No.
6341-825-101-500


Busch-Watchdog,
180 FM,
Article-No.
6345-825-101-500


Labelling symbols




Labelling inserts for blinds, lighting,
RTC and scene. The colours are repeated in the
Busch-Jaeger colour concept.

End strips with temperature sensor.

Not combinable with FM
actuators.


studio white,
Article-No. 6352-24G-101-500


white glass,
Article-No. 6352-811-101-500


glass black,
Article-No. 6352-825-101-500


stainless steel,
Article-No. 6352-860-101-500

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®



6120/12-101-500

Bus Coupler, FM

for Busch-priOn® support frame 1-fold 6346/10-10x and control elements 6122/0x-xxx, 6124/0x-xxx, 6125/0x-xxx, 6126/0x-xxx, 6127/0x-xxx, 6128/0x-xxx and 6129/0x-xxx.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6120/12-101-500	2CKA006120A0075		0.068	1
swiss version	–	6120/12-101-508	2CKA006120A0076		0.068	1



6120/13-500

Power Bus Coupler, FM, Busch-priOn®

For Busch-priOn® base frame 1-fold, 2-fold and 3-fold. Separate power supply required. The KNX connection is used exclusively for bus communication.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6120/13-500	2CKA006120A0072		0.095	1
swiss version	–	6120/13-508	2CKA006120A0073		0.095	1



6346/10-101-500

Base Frame, 1-fold, Busch-priOn®

For Busch-priOn® for seating and contact connection of rotary control elements, operating element 1-fold and 3-fold as well as the top/bottom finishing strip. For contacting with the Bus Coupler priOn or Power Bus Coupler priOn.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6346/10-101-500	2CKA006310A0135		0.012	1



6346/11-101-500

Base Frame, 2-fold, Busch-priOn®

For Busch-priOn® for seating and contact connection of 8.89 cm (3.5") TFT colour display with rotary control element, rotary control element 1-fold and 3-fold as well as the top/bottom finishing strip. For contacting with the Power Bus Coupler priOn.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6346/11-101-500	2CKA006310A0137		0.116	1




6346/12-101-500

Base Frame, 3-fold, Busch-priOn®

For Busch-priOn® for seating and contact connection of 8.89 cm (3.5") TFT colour display with rotary control element, rotary control element 1-fold and 3-fold as well as the top/bottom finishing strip. For contacting with the Power Bus Coupler priOn.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6346/12-101-500	2CKA006310A0139		0.159	1




6340-825-101-500

Control Element, 1-fold, Busch-priOn®

Freely programmable multi-function operation element for installation in the Base Frame 1-fold, 2-fold or 3-fold. Supports the KNX functions with innovative colour concept on the labelling symbols or standard lighting in red/green. The accompanying symbol can be substituted by other alternative labelling symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6340-24G-101-500	2CKA006310A0109		0.188	1
white glass	–	6340-811-101-500	2CKA006310A0168		0.164	1
glass black	–	6340-825-101-500	2CKA006310A0108		0.145	1
stainless steel	–	6340-866-101-500	2CKA006310A0106		0.325	1




6342-825-101-500

Control Element, 3-fold, Busch-priOn®

Freely programmable multi-function operation element for installation in the Base Frame 1-fold, 2-fold or 3-fold. Supports the KNX functions with innovative colour concept on the labelling symbols or standard lighting in red/green. The accompanying symbol can be substituted by other alternative labelling symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6342-24G-101-500	2CKA006310A0125		0.191	1
white glass	–	6342-811-101-500	2CKA006310A0172		0.203	1
glass black	–	6342-825-101-500	2CKA006310A0124		0.203	1
stainless steel	–	6342-866-101-500	2CKA006310A0122		0.32	1



6341-825-101-500

Rotary Control Element, 1-fold, Busch-priOn®

Freely programmable multi-function rotary control element for installation in the Base Frame 1-fold, 2-fold or 3-fold. Supports the KNX functions with innovative colour concept on the rotary knob or standard lighting in red/green. Rotary knob stainless steel.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6341-24G-101-500	2CKA006310A0117		0.218	1
white glass	–	6341-811-101-500	2CKA006310A0170		0.23	1
glass black	–	6341-825-101-500	2CKA006310A0116		0.175	1
stainless steel	–	6341-866-101-500	2CKA006310A0114		0.336	1

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®



6345-825-101-500

Busch Watchdog® 180 FM Sensor, Busch-priOn®

Sends switching commands with motion detection in combination with the bus coupler Busch-priOn®. Programmable via ETS for automatic and semi-automatic operation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6345-24G-101-500	2CKA006310A0081		0.188	1
white glass	–	6345-811-101-500	2CKA006310A0176		0.166	1
glass black	–	6345-825-101-500	2CKA006310A0080		0.167	1
stainless steel	–	6345-866-101-500	2CKA006310A0078		0.325	1



6348-825-101-500

Top End Strip, Busch-priOn®

For mounting on Base Frame 1-fold to 3-fold.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6348-24G-101-500	2CKA006310A0147		0.024	1
white glass	–	6348-811-101-500	2CKA006310A0178		0.034	1
glass black	–	6348-825-101-500	2CKA006310A0146		0.027	1
stainless steel	–	6348-860-101-500	2CKA006310A0144		0.048	1



6350-825-101-500

Top End Strip with IR Receiver and Proximity Sensor, Busch-priOn®

For mounting on Base Frame 1-fold to 3-fold. With integrated IR receiver for control by IR handheld control as well as integrated proximity function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	6350-825-101-500	2CKA006310A0157		0.037	1



6349-825-101-500

Bottom End Strip, without logo, Busch-priOn®

For mounting on Base Frame 1-fold to 3-fold.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6349-24G-101-500	2CKA006310A0155		0.024	1
white glass	–	6349-811-101-500	2CKA006310A0180		0.035	1
glass black	–	6349-825-101-500	2CKA006310A0154		0.027	1
stainless steel	–	6349-860-101-500	2CKA006310A0152		0.048	1



6352-825-101-500

Bottom End Strip with Temperature Sensor, Busch-priOn®

For mounting on Base Frame 1-fold to 3-fold. Provides the value measured by the temperature sensor to the 8.89 cm (3.5") TFT colour display or the room thermostat.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6352-24G-101-500	2CKA006310A0165		0.024	1
white glass	–	6352-811-101-500	2CKA006310A0182		0.04	1
glass black	–	6352-825-101-500	2CKA006310A0164		0.024	1
stainless steel	–	6352-860-101-500	2CKA006310A0162		0.048	1



6351/08-825-500

**Top End Strip with Display, Room Thermostat,
IR Receiver and Proximity Sensor, Busch-priOn®**

Top end strip for installation on 1 gang to 3 gang support frame (6346/10-101, 6346/11-101 and 6346/12-101). With integrated IR receiver for control using the Busch remote control 6010-25 or 6020-.../6121... and integrated proximity function. For heating and cooling (PI, PWM or 2-point). For control of up to 5-level ventilation actuators. With manual adjustment of fan levels. Master/slave configuration. With base-load operation. Display of up to 17 functions as text and/or icon. Only in connection with 1 gang rotary control element (6341-xxx-101) and 3 gang control element (6342-xxx-101) possible. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Detection range: frontal: 0.5 m, lateral: 0.5 m. Detection angle: 100°. Mounting height: 1.1 m. Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C. Dimensions (L x W x D): 33.4 mm x 106.6 mm x 15.5 mm

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	6351/08-825-500	2CKA006310A0183		0.064	1

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®



6353/20-860-500

Inscription Symbols, Busch-priOn®

For Busch-priOn® operating element 1-fold to 3-fold with different symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
lighting	–	6353/20-860-500	2CKA006310A0093		0.011	1
blind	–	6353/30-860-500	2CKA006310A0094		0.011	1
Room Temperature	–	6353/40-860-500	2CKA006310A0095		0.011	1
scene	–	6353/50-860-500	2CKA006310A0096		0.011	1



6149/21-500

Commissioning Interface/Adapter

6120/12-101-500 and 6120/13-500 via USB port or via SD card slot.

With integrated battery for independent operation for up to 8 h.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6149/21-500	2CKA006133A0201		0.15	1



CP-D 24/2.5

Power Supply Unit, 24 V DC, 2.5 A

For ABB SmartTouch® 10" ST/U10.4.1-xx, Busch-priOn® Power Bus Coupler 6120/13-500 and KNX APP-Control Server CT/S 2.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CP-D 24/2.5	2CDG120037R0011		0.252	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®

NEW – ABB Tenton® Generation 2

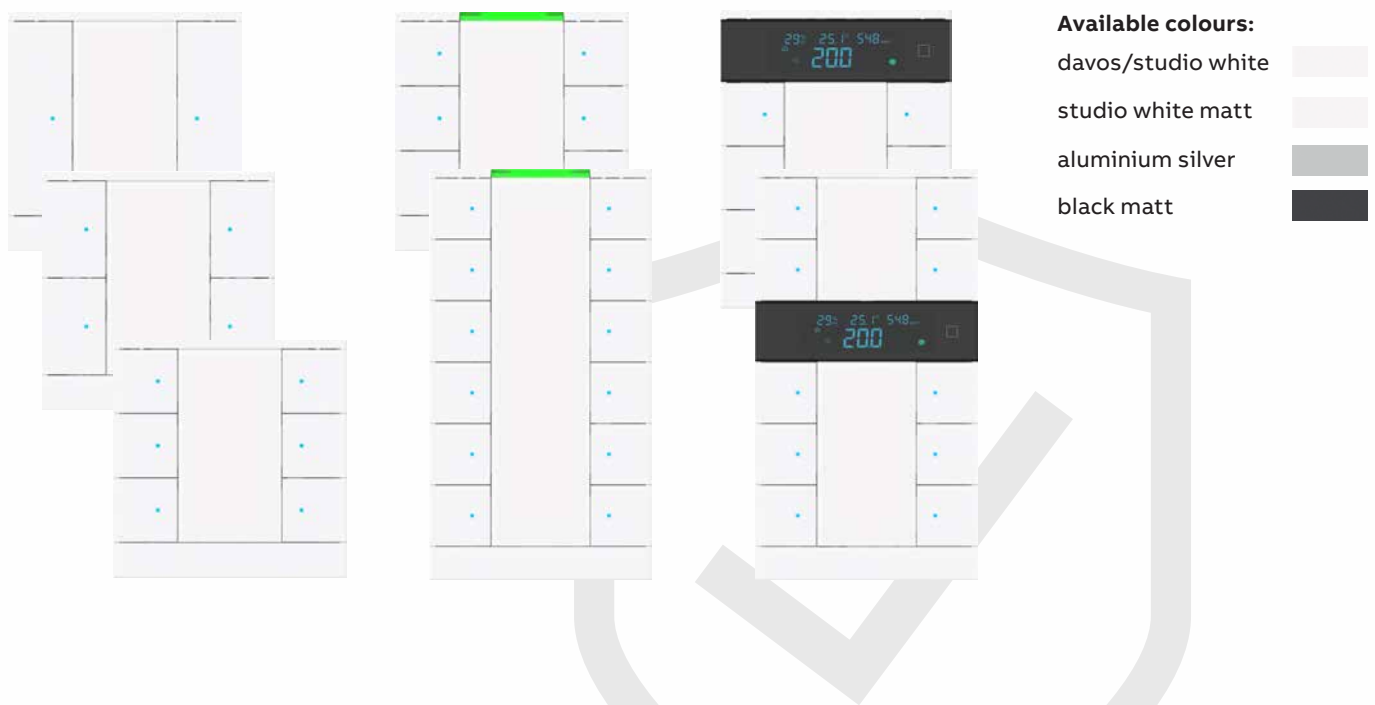


ABB Tenton® 2.0 is a control solution that reduces complexity while enhancing quality of life – for rooms that feel good today, tomorrow and beyond.

You immediately notice a pleasant indoor environment: comfortable temperature, fresh air, the right lighting – all working together without requiring your attention. ABB Tenton® 2.0 was designed precisely for this seamless coordination. As a multifunctional control unit, it combines operation, room temperature regulation, and air quality and humidity measurement in one clear, streamlined solution – suitable for living spaces, offices, schools and hotels alike.

Thanks to flexible surface-mounted or flush-mounted installation, ABB Tenton® 2.0 is easy to integrate into both new buildings and modernizations. It fits almost all common standard sockets (VDE, BS, CH, NEMA and Australian brackets) and enables intelligent room control with minimal effort.

More comfort through less technology

ABB Tenton® 2.0 is available in 2-, 4-, 6-, 8- and 12-fold versions. Depending on the model, temperature, humidity and CO₂ sensors as well as the new Unified RTC 3.0 are already integrated. This reduces external components, simplifies planning and installation, and results in a clean, unobtrusive technology setup. RGB status LEDs on the control elements make functions and operating states discreetly visible.

Understanding the indoor climate – at a glance

One of the key innovations is the redesigned display. Depending on the model, it clearly shows CO₂ levels, humidity, current room temperature, and the selected setpoint value. Additional status indicators provide clear information on heating or cooling mode, operating mode, window status, protection or lock modes, as well as time and date. This allows users to understand the room's conditions at a glance – intuitively, calmly, and without technical complexity.

Efficient today, ready for tomorrow

As part of the ABB ClimaEco system, ABB Tenton® 2.0 enables conscious, efficient energy use. Precise individual room control increases comfort while reducing energy consumption. Low internal power use, KNX Secure, and planned compatibility with both KNX and free@home ensure that the system remains future proof and ready to grow over time.

SUMMARY:

Range expansion of the actual assortment with a 2-fold, 4-fold and 6-fold Control element with temperature/humidity sensor.

Range expansion of the actual assortment with a 6-fold and 12-fold Control element with traffic light for RTC, humidity and CO₂ visualization, temperature/humidity sensor, CO₂-measurement and replacement of the actual assortment.

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®



SB/U2.0.2-84

Control Element with Temperature-/Humidity Sensor, 2-fold

NEW

Freely configurable control element with temperature/humidity sensor and humidity and dew point controller function. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1.

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SB/U2.0.2-84	2CKA006330A0163			1
studio white matt	–	SB/U2.0.2-884	2CKA006330A0164			1
aluminium silver	–	SB/U2.0.2-83	2CKA006330A0165			1
black matt	–	SB/U2.0.2-885	2CKA006330A0166			1



SB/U4.0.2-885

Control Element with Temperature-/Humidity Sensor, 4-fold

NEW

Freely configurable control element with temperature/humidity sensor and humidity and dew point controller function. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1.

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SB/U4.0.2-84	2CKA006330A0171			1
studio white matt	–	SB/U4.0.2-884	2CKA006330A0172			1
aluminium silver	–	SB/U4.0.2-83	2CKA006330A0173			1
black matt	–	SB/U4.0.2-885	2CKA006330A0174			1



SB/U6.0.2-84

Control Element with Temperature-/Humidity Sensor, 6-fold

NEW

Freely configurable control element with temperature/humidity sensor and humidity and dew point controller function. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1.

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SB/U6.0.2-84	2CKA006330A0179			1
studio white matt	–	SB/U6.0.2-884	2CKA006330A0180			1
aluminium silver	–	SB/U6.0.2-83	2CKA006330A0181			1
black matt	–	SB/U6.0.2-885	2CKA006330A0182			1




SB/U8.0.2-885

Control Element with Temperature-/Humidity Sensor, 8-fold

NEW

Freely configurable control element with temperature/humidity sensor and humidity and dew point controller function. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1. Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SB/U8.0.2-84	2CKA006330A0259			1
studio white matt	–	SB/U8.0.2-884	2CKA006330A0260			1
black matt	–	SB/U8.0.2-885	2CKA006330A0261			1
aluminium silver	–	SB/U8.0.2-83	2CKA006330A0262			1



SB/U12.0.2-84

Control Element with Temperature-/Humidity Sensor, 12-fold

NEW

Freely configurable control element with temperature/humidity sensor and humidity and dew point controller function. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1. Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SB/U12.0.2-84	2CKA006330A0267			1
studio white matt	–	SB/U12.0.2-884	2CKA006330A0268			1
black matt	–	SB/U12.0.2-885	2CKA006330A0269			1
aluminium silver	–	SB/U12.0.2-83	2CKA006330A0270			1



SBOC/U6.0.2-885

Control Element with CO₂-/Temperature-/Humidity Sensor, 6-fold


NEW

Freely configurable control element with CO₂/temperature/humidity sensor and CO₂/humidity and dew point controller function. Visualization of CO₂/humidity over the integrated traffic light. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1. Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBOC/U6.0.2-84	2CKA006330A0187			1
studio white matt	–	SBOC/U6.0.2-884	2CKA006330A0188			1
aluminium silver	–	SBOC/U6.0.2-83	2CKA006330A0189			1
black matt	–	SBOC/U6.0.2-885	2CKA006330A0190			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®



SBOC/U12.0.2-84

Control Element with CO₂-/Temperature-/Humidity Sensor, 12-fold

NEW

Freely configurable control element with CO₂/temperature/humidity sensor and CO₂/humidity and dew point controller function. Visualization of CO₂/humidity over the integrated traffic light. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1
Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBOC/U12.0.2-84	2CKA006330A0195			1
studio white matt	–	SBOC/U12.0.2-884	2CKA006330A0196			1
aluminium silver	–	SBOC/U12.0.2-83	2CKA006330A0197			1
black matt	–	SBOC/U12.0.2-885	2CKA006330A0198			1



SBS/U6.0.2-885

Control Element with RTC Secondary Unit and Temperature-/Humidity Sensor, 6-fold

NEW

Freely configurable control element with room temperature controller extension (secondary device), temperature/humidity sensor and humidity and dew point controller function. For activating heating, ventilation and fan coil actuators. Visualization of HVAC function, CO₂/humidity and temperature values etc. over the integrated display. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1
Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBS/U6.0.2-84	2CKA006330A0211			1
studio white matt	–	SBS/U6.0.2-884	2CKA006330A0212			1
black matt	–	SBS/U6.0.2-885	2CKA006330A0213			1
aluminium silver	–	SBS/U6.0.2-83	2CKA006330A0214			1



SBR/U6.0.2-84

Room Temp. Controller with Control Element and Temperature-/Humidity Sensor, 6-fold

NEW

Freely configurable control element with room temperature controller (Primary/secondary device), temperature/humidity sensor and humidity and dew point controller function. For activating heating, ventilation and fan coil actuators. Visualization of HVAC function, CO₂/humidity and temperature values etc. over the integrated display. With labelling field. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1 Contribution to space heating energy efficiency 1,0 %. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1
Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBR/U6.0.2-84	2CKA006330A0219			1
studio white matt	–	SBR/U6.0.2-884	2CKA006330A0220			1
black matt	–	SBR/U6.0.2-885	2CKA006330A0221			1
aluminium silver	–	SBR/U6.0.2-83	2CKA006330A0222			1



SBS/U10.0.2-885

Control Element with RTC Secondary Unit and Temperature-/Humidity Sensor, 10-fold

NEW

Freely configurable control element with room temperature controller extension (secondary device), temperature/humidity sensor and humidity and dew point controller function. For activating heating, ventilation and fan coil actuators. Visualization of HVAC function, CO₂/humidity and temperature values etc. over the integrated display. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1
Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBS/U10.0.2-84	2CKA006330A0227			1
studio white matt	–	SBS/U10.0.2-884	2CKA006330A0228			1
black matt	–	SBS/U10.0.2-885	2CKA006330A0229			1
aluminium silver	–	SBS/U10.0.2-83	2CKA006330A0230			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®



SBR/U10.0.2-84

Room Temp. Controller with Control Element and Temperature-/Humidity Sensor, 10-fold

NEW

Freely configurable control element with room temperature controller (Primary/secondary device), temperature/humidity sensor and humidity and dew point controller function. For activating heating, ventilation and fan coil actuators. Visualization of HVAC function, CO₂/humidity and temperature values etc. over the integrated display. With labelling field. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1 Contribution to space heating energy efficiency 1,0 %. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 1

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBR/U10.0.2-84	2CKA006330A0235			1
studio white matt	–	SBR/U10.0.2-884	2CKA006330A0236			1
black matt	–	SBR/U10.0.2-885	2CKA006330A0237			1
aluminium silver	–	SBR/U10.0.2-83	2CKA006330A0238			1



SBRC/U6.0.1-885

RTC with CO₂/Humidity Sensor and Control Element, 6-fold

NEW

Freely configurable control element with room temperature controller (Primary/secondary device), CO₂/temperature/humidity sensor and CO₂/humidity and dew point controller function. For activating heating, ventilation and fan coil actuators. Visualization of HVAC function, CO₂/humidity and temperature values etc. over the integrated display. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1 Contribution to space heating energy efficiency 1,0 %. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 2

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBRC/U6.0.1-84	2CKA006330A0243			1
studio white matt	–	SBRC/U6.0.1-884	2CKA006330A0244			1
black matt	–	SBRC/U6.0.1-885	2CKA006330A0245			1
aluminium silver	–	SBRC/U6.0.1-83	2CKA006330A0246			1



SBRC/U10.0.1-84

RTC with CO₂/Humidity Sensor and Control Element, 10-fold

NEW

Freely configurable control element with room temperature controller (Primary/secondary device), CO₂/temperature/humidity sensor and CO₂/humidity and dew point controller function. For activating heating, ventilation and fan coil actuators. Visualization of HVAC function, CO₂/humidity and temperature values etc. over the integrated display. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1 Contribution to space heating energy efficiency 1,0 %. With integrated KNX bus coupler. The device supports KNX Data Secure. Number of bus subscribers: 2
Available September 2026

Description	Mod. width	Order details		Price	Weight	Pack unit
		Type code	Order code	1 piece	1 piece	
				€	kg	pc.
davos/studio white	–	SBRC/U10.0.1-84	2CKA006330A0251			1
studio white matt	–	SBRC/U10.0.1-884	2CKA006330A0252			1
black matt	–	SBRC/U10.0.1-885	2CKA006330A0253			1
aluminium silver	–	SBRC/U10.0.1-83	2CKA006330A0254			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®



SAM/A.0.2-84

Support Frame, small, SM

NEW

Surface-mounted housing for mounting 2-fold/4-fold/6-fold control element and 6-fold control element with CO₂.

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAM/A.0.2-84	2CKA006330A0203			1
black matt	–	SAM/A.0.2-885	2CKA006330A0206			1



SAS/A.0.2-885

Support Frame, large, SM

NEW

Surface-mounted housing for mounting 8-fold control element and 6-fold control element with display.

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAS/A.0.2-84	2CKA006330A0755			1
black matt	–	SAS/A.0.2-885	2CKA006330A0756			1



SAB/A.0.2-84

Support Frame, big, SM

NEW

Surface-mounted housing for mounting 12-fold control element, 12-fold control element with CO₂ and 10-fold control element with display.

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAB/A.0.2-84	2CKA006330A0759			1
black matt	–	SAB/A.0.2-885	2CKA006330A0760			1



SLS/A.0.2-885

Cover for Label Area RTC, small

NEW

Labeling field for 2-fold/4-fold/6-fold control element, 6-fold control element with CO₂ and 6-fold control element with display.

Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLS/A.0.2-84	2CKA006330A0725			1
studio white matt	–	SLS/A.0.2-884	2CKA006330A0726			1
black matt	–	SLS/A.0.2-885	2CKA006330A0727			1
aluminium silver	–	SLS/A.0.2-83	2CKA006330A0728			1



SLM/A.0.2-84



SLB/A.0.2-885



SLX/A.0.2-84

Cover for Label Area Control Element, small

NEW

Labeling field for 8-fold control element.
Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLM/A.0.2-84	2CKA006330A0733			1
studio white matt	–	SLM/A.0.2-884	2CKA006330A0734			1
black matt	–	SLM/A.0.2-885	2CKA006330A0735			1
aluminium silver	–	SLM/A.0.2-83	2CKA006330A0736			1

Cover for Label Area RTC, large

NEW

Upper and lower labeling field for 10-fold control element with display.
Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLB/A.0.2-84	2CKA006330A0741			1
studio white matt	–	SLB/A.0.2-884	2CKA006330A0742			1
black matt	–	SLB/A.0.2-885	2CKA006330A0743			1
aluminium silver	–	SLB/A.0.2-83	2CKA006330A0744			1

Cover for Label Area Control Element, large

NEW

Labeling field for 12-fold control element.
Available September 2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLX/A.0.2-84	2CKA006330A0749			1
studio white matt	–	SLX/A.0.2-884	2CKA006330A0750			1
black matt	–	SLX/A.0.2-885	2CKA006330A0751			1
aluminium silver	–	SLX/A.0.2-83	2CKA006330A0752			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®



SBS/U6.0.1-84

Control Element with RTC Slave Unit, 6-fold

To be discontinued

Freely configurable multifunction control element. Room Thermostat slave with max. 6 gang control. With labelling field. Transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With integrated temperature sensor. With actual value temperature display. With display of set-value temperature. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBS/U6.0.1-84	2CKA006330A0002			1
studio white matt	–	SBS/U6.0.1-884	2CKA006330A0036			1
black matt	–	SBS/U6.0.1-885	2CKA006330A0037			1
aluminium silver	–	SBS/U6.0.1-83	2CKA006330A0038			1



SBR/U6.0.1-84

Room Temperature Controller with Control Element, 6-fold

To be discontinued

Freely configurable multifunction control element. With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Push switch function: switching / dimming / blind / sending values / scenes etc. For activating heating, ventilation and fan coil actuators. Master/slave configuration. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBR/U6.0.1-84	2CKA006330A0004			1
studio white matt	–	SBR/U6.0.1-884	2CKA006330A0042			1
black matt	–	SBR/U6.0.1-885	2CKA006330A0043			1
aluminium silver	–	SBR/U6.0.1-83	2CKA006330A0044			1



SBS/U10.0.1-84

Control Element with RTC Slave Unit, 10-fold

To be discontinued

Freely configurable multifunction control element. With labelling field. Transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With integrated temperature sensor. With actual value temperature display. With display of set-value temperature. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBS/U10.0.1-84	2CKA006330A0006			1
studio white matt	–	SBS/U10.0.1-884	2CKA006330A0048			1
black matt	–	SBS/U10.0.1-885	2CKA006330A0049			1
aluminium silver	–	SBS/U10.0.1-83	2CKA006330A0050			1



SBR/U10.0.1-84

Room Temperature Controller with Control Element, 10-fold**To be discontinued**

Freely configurable multifunction control element. With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Push switch function: switching / dimming / blind / sending values / scenes etc. Master/slave configuration. With base-load operation. The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBR/U10.0.1-84	2CKA006330A0008			1
studio white matt	–	SBR/U10.0.1-884	2CKA006330A0054			1
black matt	–	SBR/U10.0.1-885	2CKA006330A0055			1
aluminium silver	–	SBR/U10.0.1-83	2CKA006330A0056			1



SBC/U6.0.1-84


RTC with CO₂/Humidity Sensor and Control Element**To be discontinued**

Control element with room temperature controller function and CO₂/moisture/air pressure sensor. With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Push switch function: switching / dimming / blind / sending values / scenes etc. For activating heating, ventilation and fan coil actuators. Master/slave configuration. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white, 6-fold	–	SBC/U6.0.1-84	2CKA006330A0010			1
studio white matt, 6-fold	–	SBC/U6.0.1-884	2CKA006330A0060			1
black matt, 6-fold	–	SBC/U6.0.1-885	2CKA006330A0061			1
aluminium silver, 6-fold	–	SBC/U6.0.1-83	2CKA006330A0062			1
davos/studio white, 10-fold	–	SBC/U10.0.1-84	2CKA006330A0012			1
studio white matt, 10-fold	–	SBC/U10.0.1-884	2CKA006330A0066			1
black matt, 10-fold	–	SBC/U10.0.1-885	2CKA006330A0067			1
aluminium silver, 10-fold	–	SBC/U10.0.1-83	2CKA006330A0068			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®



SB/U8.0.1-84

Control Element

To be discontinued

With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.

Push switch function: switching / dimming / blind / sending values / scenes etc.

With integrated temperature sensor. Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white, 8-fold	–	SB/U8.0.1-84	2CKA006330A0014			1
studio white matt, 8-fold	–	SB/U8.0.1-884	2CKA006330A0072			1
black matt, 8-fold	–	SB/U8.0.1-885	2CKA006330A0073			1
aluminium silver, 8-fold	–	SB/U8.0.1-83	2CKA006330A0074			1
davos/studio white, 12-fold	–	SB/U12.0.1-84	2CKA006330A0016			1
studio white matt, 12-fold	–	SB/U12.0.1-884	2CKA006330A0078			1
black matt, 12-fold	–	SB/U12.0.1-885	2CKA006330A0079			1
aluminium silver, 12-fold	–	SB/U12.0.1-83	2CKA006330A0080			1



SAS/A.0.1-84

Support Frame, small, SM

To be discontinued

Surface-mounted housing for mounting 8 gang control element, RT with 6 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAS/A.0.1-84	2CKA006330A0018			1
studio white matt	–	SAS/A.0.1-884	2CKA006330A0084			1
black matt	–	SAS/A.0.1-885	2CKA006330A0085			1
aluminium silver	–	SAS/A.0.1-83	2CKA006330A0086			1



SAB/A.0.1-84

Support Frame, large, SM

To be discontinued

Surface-mounted housing for mounting 12 gang control element, RT with 10 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAB/A.0.1-84	2CKA006330A0020			1
studio white matt	–	SAB/A.0.1-884	2CKA006330A0090			1
black matt	–	SAB/A.0.1-885	2CKA006330A0091			1
aluminium silver	–	SAB/A.0.1-83	2CKA006330A0092			1

**SLS/A.0.1-84****Cover for Label Area, small, RTC****To be discontinued**

Marking coverplate for RTR with 6 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLS/A.0.1-84	2CKA006330A0022			1
studio white matt	–	SLS/A.0.1-884	2CKA006330A0097			1
black matt	–	SLS/A.0.1-885	2CKA006330A0098			1
aluminium silver	–	SLS/A.0.1-83	2CKA006330A0099			1

**SLM/A.0.1-84****Cover for Label Area, Control Element, small****To be discontinued**

Marking coverplate for 8 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLM/A.0.1-84	2CKA006330A0024			1
studio white matt	–	SLM/A.0.1-884	2CKA006330A0105			1
black matt	–	SLM/A.0.1-885	2CKA006330A0106			1
aluminium silver	–	SLM/A.0.1-83	2CKA006330A0107			1

**SLB/A.0.1-84****Cover for Label Area, large, RTC****To be discontinued**

Upper marking coverplate for RT with 10-fold control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLB/A.0.1-84	2CKA006330A0026			1
studio white matt	–	SLB/A.0.1-884	2CKA006330A0113			1
black matt	–	SLB/A.0.1-885	2CKA006330A0114			1
aluminium silver	–	SLB/A.0.1-83	2CKA006330A0115			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®



SLX/A.0.1-84

Cover for Label Area, Control Element, large


To be discontinued

Marking coverplate for 12 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLX/A.0.1-84	2CKA006330A0028			1
studio white matt	–	SLX/A.0.1-884	2CKA006330A0121			1
black matt	–	SLX/A.0.1-885	2CKA006330A0122			1
aluminium silver	–	SLX/A.0.1-83	2CKA006330A0123			1

Bottom end strips without manufacturer logo

Bottom end strip for mounting on SBC/U, SBR/U, SBS/U and SB/U.



SLY/A.0.1-84

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLY/A.0.1-84	2CKA006330A0030			1
studio white matt	–	SLY/A.0.1-884	2CKA006330A0129			1
black matt	–	SLY/A.0.1-885	2CKA006330A0130			1
aluminium silver	–	SLY/A.0.1-83	2CKA006330A0131			1

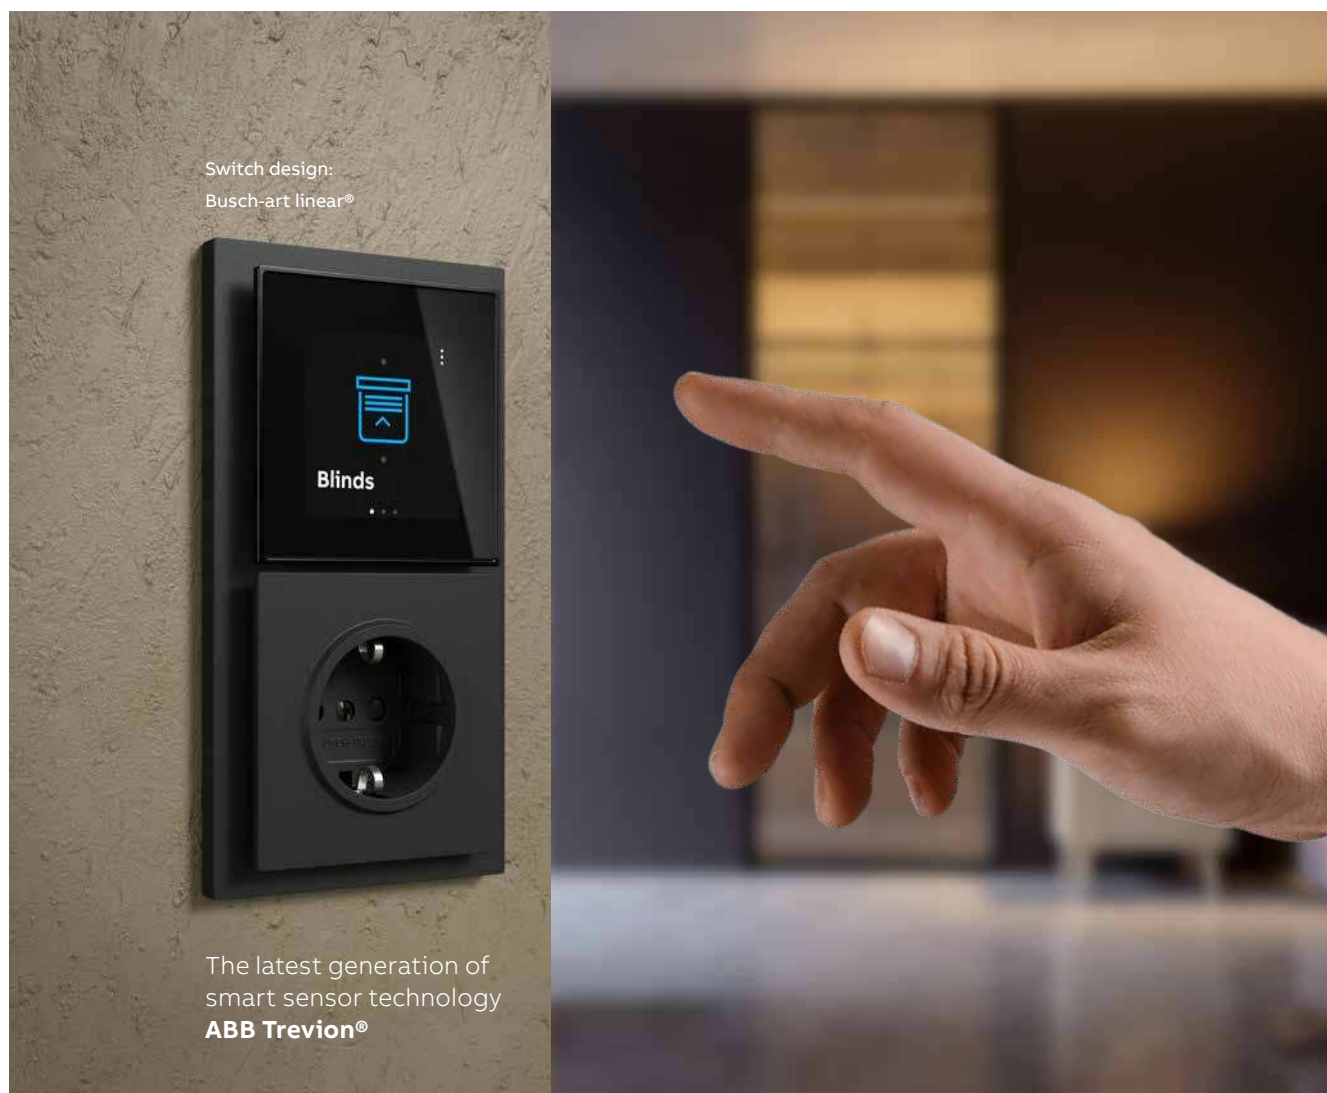


ABB Trevion®

A touch of perfection

Design and functionality have never been so in sync! ABB Trevion®'s display and control elements match many of our switch design ranges. With its innovative swipe - and rotation functions, animated light guide, and customizable display and control elements, it adds a touch of perfection to any home! solutions.abb/trevion

Let's write the future. Together.



> Table of contents

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

Busch-balance® SI



SD/U12.55.1-825

Touch Display 2.4", 55 x 55 mm, FM

Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:

- A total 12 control elements are displayed on a maximum of 12 pages
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T)

External power supply needed: 20-32 V DC (SELV)

Number of bus subscribers: 1

Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")

Display resolution: 240*240

Display screen: IPS display

Dimensions (L x W x D): 55 mm x 55 mm x 32 mm

Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.55.1-825	2TMA310011B0001		0.069	1



KK/U4.55.1

Control Element, 55 x 55 mm

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback.

Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind / shutter control, scene.

The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK

Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.55.1	2CKA006115A0506		0.0296	1



BA/U1.0.1

Bus Coupling Unit KNX

KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.

Bus connection via enclosed terminal block

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

Busch-balance® SI



LFW/A.0.55.1-CK

Cover customized

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.55.1).

Ordering possible only with the unique design ID.

The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.0.55.1-CK	2CKA006199A0162		0.0076	1




LFW/A.4.55.1-914

Cover without Icon, 1 – 4-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold	–	LFW/A.1.55.1-914	2CKA006199A0170		0.0076	1
2-fold	–	LFW/A.2.55.1-914	2CKA006199A0171		0.0076	1
3-fold	–	LFW/A.3.55.1-914	2CKA006199A0172		0.0076	1
4-fold	–	LFW/A.4.55.1-914	2CKA006199A0173		0.0076	1




LFBT/A.1.55.1-914

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFBT/A.1.55.1-914	2CKA006199A0174		0.0076	1




LFJT/A.1.55.1-914

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJT/A.1.55.1-914	2CKA006199A0175		0.0076	1



LFST/A.1.55.1-914

Cover with Scene Icon, 1-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFST/A.1.55.1-914	2CKA006199A0176		0.0076	1



LFDW/A.1.55.1-914

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.1.55.1-914	2CKA006199A0344		0.0076	1



LFJW/A.1.55.1-914

Cover with Blind Icon, 1-fold Rocker

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJW/A.1.55.1-914	2CKA006199A0345		0.0076	1



LFAW/A.1.55.1-914

Cover with Up/Down Icon, 1-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.1.55.1-914	2CKA006199A0346		0.0076	1



LFBT/A.2.55.1-914

Cover with Light Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFBT/A.2.55.1-914	2CKA006199A0347		0.0076	1



LFJT/A.2.55.1-914

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJT/A.2.55.1-914	2CKA006199A0348		0.0076	1



LFST/A.2.55.1-914

Cover with Scene Icon, 2-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFST/A.2.55.1-914	2CKA006199A0349		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

Busch-balance® SI



LFDW/A.2.55.1-914

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.2.55.1-914	2CKA006199A0350		0.0076	1



LFAW/A.2.55.1-914

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.2.55.1-914	2CKA006199A0351		0.0076	1



LFMW/A.4.55.1-914

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFMW/A.4.55.1-914	2CKA006199A0352		0.0076	1



CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®



SD/U12.63.1-825

Touch Display 2.4", 63 x 63 mm, FM

Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:

- A total 12 control elements are displayed on a maximum of 12 pages.
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T)

External power supply needed: 20-32 V DC (SELV)

Number of bus subscribers: 1

Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")

Display resolution: 240*240

Display screen: IPS display

Dimensions (L x W x D): 63 mm x 63 mm x 32 mm

Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.63.1-825	2TMA310011B0002		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®



KK/U4.63.1

Control Element, 63 x 63 mm

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback.

Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.

The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK

Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.63.1	2CKA006115A0504		0.0271	1



BA/U1.0.1

Bus Coupling Unit KNX

KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.

Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1



LFW/A.0.63.1-CK

Cover customized

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.63.1.)

Ordering possible only with the unique design ID.

The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.63.1-CK	2CKA006199A0041		0.0076	1
painted plastics	–	LFW/A.0.63.1-CKL	2CKA006199A0514		0.0076	1




LFW/A.1.63.1-81

Cover without icon, 1-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.1.63.1-81	2CKA006199A0098		0.0076	1
ivory white	–	LFW/A.1.63.1-82	2CKA006199A0099		0.0076	1
aluminium silver	–	LFW/A.1.63.1-83	2CKA006199A0100		0.0076	1
studio white	–	LFW/A.1.63.1-84	2CKA006199A0101		0.0076	1
studio white matt	–	LFW/A.1.63.1-884	2CKA006199A0102		0.0076	1
black matt	–	LFW/A.1.63.1-885	2CKA006199A0103		0.0076	1
stainless steel	–	LFW/A.1.63.1-866	2CKA006199A0105		0.0076	1



LFW/A.2.63.1-81

Cover with Design Line, 2-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.2.63.1-81	2CKA006199A0107		0.0076	1
aluminium silver	–	LFW/A.2.63.1-83	2CKA006199A0109		0.0076	1
studio white	–	LFW/A.2.63.1-84	2CKA006199A0110		0.0076	1
studio white matt	–	LFW/A.2.63.1-884	2CKA006199A0111		0.0076	1
black matt	–	LFW/A.2.63.1-885	2CKA006199A0112		0.0076	1
stainless steel	–	LFW/A.2.63.1-866	2CKA006199A0114		0.0076	1



LFW/A.3.63.1-81

Cover with Design Line, 3-fold


Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.3.63.1-81	2CKA006199A0116		0.0076	1
ivory white	–	LFW/A.3.63.1-82	2CKA006199A0117		0.0076	1
aluminium silver	–	LFW/A.3.63.1-83	2CKA006199A0118		0.0076	1
studio white	–	LFW/A.3.63.1-84	2CKA006199A0119		0.0076	1
studio white matt	–	LFW/A.3.63.1-884	2CKA006199A0120		0.0076	1
black matt	–	LFW/A.3.63.1-885	2CKA006199A0121		0.0076	1
stainless steel	–	LFW/A.3.63.1-866	2CKA006199A0123		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®




LFW/A.1.63.1-81

Cover with Design Line, 4-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.4.63.1-81	2CKA006199A0125		0.0076	1
aluminium silver	–	LFW/A.4.63.1-83	2CKA006199A0127		0.0076	1
studio white	–	LFW/A.4.63.1-84	2CKA006199A0128		0.0076	1
studio white matt	–	LFW/A.4.63.1-884	2CKA006199A0129		0.0076	1
black matt	–	LFW/A.4.63.1-885	2CKA006199A0130		0.0076	1
stainless steel	–	LFW/A.4.63.1-866	2CKA006199A0132		0.0076	1




LFBT/A.1.63.1-81

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFBT/A.1.63.1-81	2CKA006199A0134		0.0076	1
ivory white	–	LFBT/A.1.63.1-82	2CKA006199A0135		0.0076	1
aluminium silver	–	LFBT/A.1.63.1-83	2CKA006199A0136		0.0076	1
studio white	–	LFBT/A.1.63.1-84	2CKA006199A0137		0.0076	1
studio white matt	–	LFBT/A.1.63.1-884	2CKA006199A0138		0.0076	1
black matt	–	LFBT/A.1.63.1-885	2CKA006199A0139		0.0076	1
stainless steel	–	LFBT/A.1.63.1-866	2CKA006199A0141		0.0076	1




LFJT/A.1.63.1-81

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJT/A.1.63.1-81	2CKA006199A0143		0.0076	1
aluminium silver	–	LFJT/A.1.63.1-83	2CKA006199A0145		0.0076	1
studio white	–	LFJT/A.1.63.1-84	2CKA006199A0146		0.0076	1
studio white matt	–	LFJT/A.1.63.1-884	2CKA006199A0147		0.0076	1
black matt	–	LFJT/A.1.63.1-885	2CKA006199A0148		0.0076	1
stainless steel	–	LFJT/A.1.63.1-866	2CKA006199A0150		0.0076	1



LFBT/A.1.63.1-81

Cover with Scene Icon, 1-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFST/A.1.63.1-81	2CKA006199A0152		0.0076	1
ivory white	–	LFST/A.1.63.1-82	2CKA006199A0153		0.0076	1
aluminium silver	–	LFST/A.1.63.1-83	2CKA006199A0154		0.0076	1
studio white	–	LFST/A.1.63.1-84	2CKA006199A0155		0.0076	1
studio white matt	–	LFST/A.1.63.1-884	2CKA006199A0156		0.0076	1
black matt	–	LFST/A.1.63.1-885	2CKA006199A0157		0.0076	1
stainless steel	–	LFST/A.1.63.1-866	2CKA006199A0159		0.0076	1



LFDW/A.1.63.1-81

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFDW/A.1.63.1-81	2CKA006199A0263		0.0076	1
aluminium silver	–	LFDW/A.1.63.1-83	2CKA006199A0265		0.0076	1
studio white	–	LFDW/A.1.63.1-84	2CKA006199A0266		0.0076	1
studio white matt	–	LFDW/A.1.63.1-884	2CKA006199A0267		0.0076	1
black matt	–	LFDW/A.1.63.1-885	2CKA006199A0268		0.0076	1
stainless steel	–	LFDW/A.1.63.1-866	2CKA006199A0270		0.0076	1



LFJW/A.1.63.1-81

Cover with Blind Icon, 1-fold Rocker


Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJW/A.1.63.1-81	2CKA006199A0271		0.0076	1
ivory white	–	LFJW/A.1.63.1-82	2CKA006199A0272		0.0076	1
aluminium silver	–	LFJW/A.1.63.1-83	2CKA006199A0273		0.0076	1
studio white	–	LFJW/A.1.63.1-84	2CKA006199A0274		0.0076	1
studio white matt	–	LFJW/A.1.63.1-884	2CKA006199A0275		0.0076	1
black matt	–	LFJW/A.1.63.1-885	2CKA006199A0276		0.0076	1
stainless steel	–	LFJW/A.1.63.1-866	2CKA006199A0278		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®



LFAW/A.1.63.1-81

Cover with Up/Down Icon, 1-fold Button

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFAW/A.1.63.1-81	2CKA006199A0279		0.0076	1
aluminium silver	–	LFAW/A.1.63.1-83	2CKA006199A0281		0.0076	1
studio white	–	LFAW/A.1.63.1-84	2CKA006199A0282		0.0076	1
studio white matt	–	LFAW/A.1.63.1-884	2CKA006199A0283		0.0076	1
black matt	–	LFAW/A.1.63.1-885	2CKA006199A0284		0.0076	1
stainless steel	–	LFAW/A.1.63.1-866	2CKA006199A0286		0.0076	1



LFBT/A.2.63.1-81

Cover with Light Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFBT/A.2.63.1-81	2CKA006199A0287		0.0076	1
ivory white	–	LFBT/A.2.63.1-82	2CKA006199A0288		0.0076	1
aluminium silver	–	LFBT/A.2.63.1-83	2CKA006199A0289		0.0076	1
studio white	–	LFBT/A.2.63.1-84	2CKA006199A0290		0.0076	1
studio white matt	–	LFBT/A.2.63.1-884	2CKA006199A0291		0.0076	1
black matt	–	LFBT/A.2.63.1-885	2CKA006199A0292		0.0076	1
stainless steel	–	LFBT/A.2.63.1-866	2CKA006199A0294		0.0076	1



LFJT/A.2.63.1-81

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJT/A.2.63.1-81	2CKA006199A0295		0.0076	1
aluminium silver	–	LFJT/A.2.63.1-83	2CKA006199A0297		0.0076	1
studio white	–	LFJT/A.2.63.1-84	2CKA006199A0298		0.0076	1
studio white matt	–	LFJT/A.2.63.1-884	2CKA006199A0299		0.0076	1
black matt	–	LFJT/A.2.63.1-885	2CKA006199A0300		0.0076	1
stainless steel	–	LFJT/A.2.63.1-866	2CKA006199A0302		0.0076	1



LFST/A.2.63.1-81

Cover with Scene Icon, 2-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFST/A.2.63.1-81	2CKA006199A0303		0.0076	1
ivory white	–	LFST/A.2.63.1-82	2CKA006199A0304		0.0076	1
aluminium silver	–	LFST/A.2.63.1-83	2CKA006199A0305		0.0076	1
studio white	–	LFST/A.2.63.1-84	2CKA006199A0306		0.0076	1
studio white matt	–	LFST/A.2.63.1-884	2CKA006199A0307		0.0076	1
black matt	–	LFST/A.2.63.1-885	2CKA006199A0308		0.0076	1
stainless steel	–	LFST/A.2.63.1-866	2CKA006199A0310		0.0076	1




LFDW/A.2.63.1-81

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFDW/A.2.63.1-81	2CKA006199A0311		0.0076	1
aluminium silver	–	LFDW/A.2.63.1-83	2CKA006199A0313		0.0076	1
studio white	–	LFDW/A.2.63.1-84	2CKA006199A0314		0.0076	1
studio white matt	–	LFDW/A.2.63.1-884	2CKA006199A0315		0.0076	1
black matt	–	LFDW/A.2.63.1-885	2CKA006199A0316		0.0076	1
stainless steel	–	LFDW/A.2.63.1-866	2CKA006199A0318		0.0076	1



LFAW/A.2.63.1-81

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with two up/down icons for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFAW/A.2.63.1-81	2CKA006199A0319		0.0076	1
ivory white	–	LFAW/A.2.63.1-82	2CKA006199A0320		0.0076	1
aluminium silver	–	LFAW/A.2.63.1-83	2CKA006199A0321		0.0076	1
studio white	–	LFAW/A.2.63.1-84	2CKA006199A0322		0.0076	1
studio white matt	–	LFAW/A.2.63.1-884	2CKA006199A0323		0.0076	1
black matt	–	LFAW/A.2.63.1-885	2CKA006199A0324		0.0076	1
stainless steel	–	LFAW/A.2.63.1-866	2CKA006199A0326		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®



LFMW/A.4.63.1-81

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFMW/A.4.63.1-81	2CKA006199A0327		0.0076	1
ivory white	–	LFMW/A.4.63.1-82	2CKA006199A0328		0.0076	1
aluminium silver	–	LFMW/A.4.63.1-83	2CKA006199A0329		0.0076	1
studio white	–	LFMW/A.4.63.1-84	2CKA006199A0330		0.0076	1
studio white matt	–	LFMW/A.4.63.1-884	2CKA006199A0331		0.0076	1
black matt	–	LFMW/A.4.63.1-885	2CKA006199A0332		0.0076	1
stainless steel	–	LFMW/A.4.63.1-866	2CKA006199A0334		0.0076	1



CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

Busch-art linear®/ALBA®Touch



SD/U12.70.1-4015

Touch Display 2.4", 70 x 70 mm, FM

Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:

- A total 12 control elements are displayed on a maximum of 12 pages.
- 18 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T)

External power supply needed: 20-32 V DC (SELV)

Number of bus subscribers: 1

Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")

Display resolution: 240*240

Display screen: IPS display

Dimensions (L x W x D): 69.5 mm x 69.5 mm x 32 mm

Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.70.1-4015	2TMA310011B0004		0.078	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

Busch-art linear®/ALBA®Touch



KK/U4.70.1

Control Element, 70 x 70 mm

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback.

Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.

The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK

Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.70.1	2CKA006115A0510		0.11586	1



BA/U1.0.1

Bus Coupling Unit KNX

KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.

Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1



LFW/A.0.70.1-CK


Cover customized

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.70.1.)

Ordering possible only with the unique design ID.

The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.70.1-CK	2CKA006199A0025		0.011586	1
painted plastics	–	LFW/A.0.70.1-CKL	2CKA006199A0519		0.011586	1



LFW/A.1.70.1-44G

Cover without Icon, 1-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.1.70.1-44G	2CKA006199A0435		0.011586	1
white matt	–	LFW/A.1.70.1-44M	2CKA006199A0451		0.011586	1
black matt	–	LFW/A.1.70.1-45M	2CKA006199A0483		0.011586	1




LFW/A.2.70.1-44G

Cover with Design Line, 2-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.2.70.1-44G	2CKA006199A0436		0.011586	1
white matt	–	LFW/A.2.70.1-44M	2CKA006199A0452		0.011586	1
black matt	–	LFW/A.2.70.1-45M	2CKA006199A0484		0.011586	1




LFW/A.3.70.1-44G

Cover with Design Line, 3-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.3.70.1-44G	2CKA006199A0437		0.011586	1
white matt	–	LFW/A.3.70.1-44M	2CKA006199A0453		0.011586	1
black matt	–	LFW/A.3.70.1-45M	2CKA006199A0485		0.011586	1



LFW/A.4.70.1-44G

Cover with Design Line, 4-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.4.70.1-44G	2CKA006199A0438		0.011586	1
white matt	–	LFW/A.4.70.1-44M	2CKA006199A0454		0.011586	1
black matt	–	LFW/A.4.70.1-45M	2CKA006199A0486		0.011586	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

Busch-art linear®/ALBA®Touch



LFB/A.1.70.1-44G

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFB/A.1.70.1-44G	2CKA006199A0439		0.011586	1
white matt	–	LFB/A.1.70.1-44M	2CKA006199A0455		0.011586	1
black matt	–	LFB/A.1.70.1-45M	2CKA006199A0487		0.011586	1



LFJ/A.1.70.1-44G

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJ/A.1.70.1-44G	2CKA006199A0440		0.011586	1
white matt	–	LFJ/A.1.70.1-44M	2CKA006199A0456		0.011586	1
black matt	–	LFJ/A.1.70.1-45M	2CKA006199A0488		0.011586	1



LFS/A.1.70.1-44G

Cover with Scene Icon, 1-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFS/A.1.70.1-44G	2CKA006199A0441		0.011586	1
white matt	–	LFS/A.1.70.1-44M	2CKA006199A0457		0.011586	1
black matt	–	LFS/A.1.70.1-45M	2CKA006199A0489		0.011586	1



LFDW/A.1.70.1-44G

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFDW/A.1.70.1-44G	2CKA006199A0442		0.011586	1
white matt	–	LFDW/A.1.70.1-44M	2CKA006199A0458		0.011586	1
black matt	–	LFDW/A.1.70.1-45M	2CKA006199A0490		0.011586	1



LFJW/A.1.70.1-44G

Cover with Blind Icon, 1-fold Rocker

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJW/A.1.70.1-44G	2CKA006199A0443		0.011586	1
white matt	–	LFJW/A.1.70.1-44M	2CKA006199A0459		0.011586	1
black matt	–	LFJW/A.1.70.1-45M	2CKA006199A0491		0.011586	1



LFAW/A.1.70.1-44G

Cover with Up/Down Icon, 1-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFAW/A.1.70.1-44G	2CKA006199A0444		0.011586	1
white matt	–	LFAW/A.1.70.1-44M	2CKA006199A0460		0.011586	1
black matt	–	LFAW/A.1.70.1-45M	2CKA006199A0492		0.011586	1



LFBT/A.2.70.1-44G

Cover with Light Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFBT/A.2.70.1-44G	2CKA006199A0445		0.011586	1
white matt	–	LFBT/A.2.70.1-44M	2CKA006199A0461		0.011586	1
black matt	–	LFBT/A.2.70.1-45M	2CKA006199A0493		0.011586	1



LFJT/A.2.70.1-44G

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJT/A.2.70.1-44G	2CKA006199A0446		0.011586	1
white matt	–	LFJT/A.2.70.1-44M	2CKA006199A0462		0.011586	1
black matt	–	LFJT/A.2.70.1-45M	2CKA006199A0494		0.011586	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion®

Busch-art linear®/ALBA®Touch



LFST/A.2.70.1-44G

Cover with Scene Icon, 2-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFST/A.2.70.1-44G	2CKA006199A0447		0.011586	1
white matt	–	LFST/A.2.70.1-44M	2CKA006199A0463		0.011586	1
black matt	–	LFST/A.2.70.1-45M	2CKA006199A0495		0.011586	1




LFDW/A.2.70.1-44G

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFDW/A.2.70.1-44G	2CKA006199A0448		0.011586	1
white matt	–	LFDW/A.2.70.1-44M	2CKA006199A0464		0.011586	1
black matt	–	LFDW/A.2.70.1-45M	2CKA006199A0496		0.011586	1




LFAW/A.2.70.1-44G

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFAW/A.2.70.1-44G	2CKA006199A0449		0.011586	1
white matt	–	LFAW/A.2.70.1-44M	2CKA006199A0465		0.011586	1
black matt	–	LFAW/A.2.70.1-45M	2CKA006199A0497		0.011586	1



LFMW/A.4.70.1-44G

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFMW/A.4.70.1-44G	2CKA006199A0450		0.011586	1
white matt	–	LFMW/A.4.70.1-44M	2CKA006199A0466		0.011586	1
black matt	–	LFMW/A.4.70.1-45M	2CKA006199A0498		0.011586	1



CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX

User Operation – Design Ranges – saga touch™



SD/U12.55.1-825

Touch Display 2.4", 55 x 55 mm, FM

Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching Dimming Slider Blind RGBW control element Step switch Scene switch Display element Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:

- A total 12 control elements are displayed on a maximum of 12 pages.
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T).

External power supply needed: 20-32 V DC (SELV)

Number of bus subscribers: 1

Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")

Display resolution: 240*240

Display screen: IPS display

Dimensions (L x W x D): 55 mm x 55 mm x 32 mm

Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.55.1-825	2TMA310011B0001		0.069	1

ABB i-bus® KNX

User Operation – Design Ranges – saga touch™



KK/U4.55.1

Control Element, 55 x 55 mm

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene. The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK

Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.55.1	2CKA006115A0506		0.0296	1



BA/U1.0.1

Bus Coupling Unit KNX

KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.

Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	BA/U1.0.1	2CKA006120A0080		0.121	1



LFW/A.0.55.91-CK

Cover customized

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.55.1).

Ordering possible only with the unique design ID.

The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.55.91-CK	2CKA006199A0185		0.0076	1



LFW/A.1.55.91-916

Cover without Icon, 1-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.1.55.91-916	2CKA006199A0186		0.0076	1



LFW/A.2.55.91-916

Cover with Design Line, 2-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.2.55.91-916	2CKA006199A0187		0.0076	1



LFW/A.3.55.91-916

Cover with Design Line, 3-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.3.55.91-916	2CKA006199A0188		0.0076	1



LFW/A.4.55.91-916

Cover with Design Line, 4-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.4.55.91-916	2CKA006199A0189		0.0076	1




LFB/A.1.55.91-916

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFB/A.1.55.91-916	2CKA006199A0499		0.0076	1



LFJ/A.1.55.91-916

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJ/A.1.55.91-916	2CKA006199A0500		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – saga touch™



LFS/A.1.55.91-916

Cover with Scene Icon, 1-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFS/A.1.55.91-916	2CKA006199A0501		0.0076	1



LFDW/A.1.55.91-916

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.1.55.91-916	2CKA006199A0502		0.0076	1



LFJW/A.1.55.91-916

Cover with Blind Icon, 1-fold Rocker

Labeling field with one blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJW/A.1.55.91-916	2CKA006199A0503		0.0076	1



LFAW/A.1.55.91-916

Cover with Up/Down Icon, 1-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.1.55.91-916	2CKA006199A0504		0.0076	1



LFBT/A.2.55.91-916

Cover with Light Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFBT/A.2.55.91-916	2CKA006199A0505		0.0076	1



LFJT/A.2.55.91-916

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJT/A.2.55.91-916	2CKA006199A0506		0.0076	1



LFST/A.2.55.91-916

Cover with Scene Icon, 2-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFST/A.2.55.91-916	2CKA006199A0507		0.0076	1



LFDW/A.2.55.91-916

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.2.55.91-916	2CKA006199A0508		0.0076	1



LFAW/A.2.55.91-916

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.2.55.91-916	2CKA006199A0509		0.0076	1



LFMW/A.4.55.91-916

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFMW/A.4.55.91-916	2CKA006199A0510		0.0076	1



CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX


User Operation – Design Ranges – Standard Control Elements

The standard control elements are available as 1/2 gang, 2/4 gang or 4/8 gang models. Every switch rocker has two LEDs, which display the status of the connected loads. The separate switch rockers are freely programmable and are suitable for switching and dimming, and also for operating blinds and as a light scene extension unit.

They can also be used in commercial applications. Anti-theft protection has also been integrated – an important factor for installations in public areas.

Customised text. Pictograms can be applied to push buttons for easier orientation. A clear text template with standard symbols is included for every sensor. The self-explanatory pictograms are available for the complete range of building control technology and if necessary can be easily replaced. If the appropriate symbol is not included, the push buttons can be labelled as desired. The related bus-coupler unit is included in delivery.

01



Function

Switching | Dimming | Blinds |
Push-button | Value transmitter |
Light scene extension unit

Features

Labellable switch rockers |
Anti-theft protection | Freely
programmable switches |
Status/orientation light
(red/green/OFF)

02



Function

Switching | Dimming | Blinds |
Push-button | Value transmitter |
Light scene extension unit

Features

Labellable switch rockers |
Anti-theft protection | Freely
programmable switches |
Status/orientation light
(red/green/OFF)

03



Function

Switching | Dimming | Blinds |
Push-button | Value transmitter |
Light scene extension unit

Features

Labellable switch rockers |
Anti-theft protection | Freely
programmable switches |
Status/orientation light
(red/green/OFF)

01 Standard control element 1/2 gang

02 Standard control element 2/4 gang

03 Standard control element 4/8 gang

Standard Control Element with bus coupler enclosed

With labelling field. Transparent labelling sheet with standard symbols included in delivery.

Display elements: Two LED per rocker via separate communication object for status (Red/Green/OFF) or orientation light. Protection class (Device): IP 20.

Temperature range (Device): -5 °C to +45 °C. Dimensions (L x W x D): 63 mm x 63 mm.



6125/01



6126/01



6127/01

Pack unit pc.	Weight 1 pc. kg	Description	Control Element with Bus Coupler, standard, FM, 1-fold with bus coupler enclosed			Control Element with Bus Coupler, standard, FM, 2-fold with bus coupler enclosed			Control Element with Bus Coupler, standard, FM, 4-fold with bus coupler enclosed		
			With 1 Control element: rocker switch left/right			With 2 Control elements: rocker switch left/right			With 4 Control elements: rocker switch left/right		
			Order details	Price		Order details	Price		Order details	Price	
			Type	Order code	€	Type	Order code	€	Type	Order code	€
		future® linear									
1		anthracite	6125/01-81-500	2CKA006115A0205		6126/01-81-500	2CKA006116A0195		6127/01-81-500	2CKA006117A0221	
1		savanne/ivory	6125/01-82-500	2CKA006115A0206		6126/01-82-500	2CKA006116A0196		6127/01-82-500	2CKA006117A0222	
1		aluminium silver ¹⁾	6125/01-83-500	2CKA006115A0207		6126/01-83-500	2CKA006116A0197		6127/01-83-500	2CKA006117A0223	
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	
1		studio white, matt ¹⁾	6125/01-884-500	2CKA006115A0214		6126/01-884-500	2CKA006116A0204		6127/01-884-500	2CKA006117A0230	
1		black, matt ¹⁾	6125/01-885-500	2CKA006115A0215		6126/01-885-500	2CKA006116A0205		6127/01-885-500	2CKA006117A0231	
		solo®									
1		savanne/ivory	6125/01-82-500	2CKA006115A0206		6126/01-82-500	2CKA006116A0196		6127/01-82-500	2CKA006117A0222	
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	
		carat®									
1		anthracite	6125/01-81-500	2CKA006115A0205		6126/01-81-500	2CKA006116A0195		6127/01-81-500	2CKA006117A0221	
1		savanne/ivory	6125/01-82-500	2CKA006115A0206		6126/01-82-500	2CKA006116A0196		6127/01-82-500	2CKA006117A0222	
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	
		pure stainless steel ¹⁾									
1		stainless steel	6125/01-866-500	2CKA006115A0211		6126/01-866-500	2CKA006116A0201		6127/01-866-500	2CKA006117A0227	
		Busch-axcent®									
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	

¹⁾ Surface painted


ABB i-bus® KNX

User Operation – Design Ranges – Multifunction Control Elements

The multifunction control elements with LED colour code concept meet the highest demands for comfort and technology. They each come with two RGB LEDs per rocker switch, which conform

to a consistent colour concept. This makes the function obvious at a glance, and the surfaces can be additionally fitted with pictograms. Each side of a rocker switch can be occupied with its

own function – each for calling up one light scene, for instance. This turns a 4 gang control element into an 8 gang control element.



- 01 Multifunction control element 1/2 gang
- 02 Multifunction control element 2/4 gang
- 03 Multifunction control element 4/8 gang
- 04 Multifunction control element 2/4 gang, integrated room thermostat
- 05 Multifunction control element 3/6 gang with IR reception
- 06 FM movement detector standard
- 07 FM movement detector comfort

01



Function

Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit | Step-type | Multiple operation | Logic function (including light scenes)

Features

Labellable switch rockers | Anti-theft protection | Freely programmable switches | LED colour code concept

02



Function

Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit | Step-type | Multiple operation | Logic function (including light scenes)

Features

Labellable switch rockers | Anti-theft protection | Freely programmable switches | LED colour code concept

03



Function

Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit | Step-type | Multiple operation | Logic function (including light scenes)

Features

Labellable switch rockers | Anti-theft protection | Freely programmable switches | LED colour code concept

Wide range. Different shapes, colours and materials fulfil every requirement. KNX control elements are available in the carat®, pure stainless steel, solo®, Busch-axcent® and future® linear pro-

grammes. The complete range of conventional switches from these series is available, so there are no limits to the options for combining KNX components.



04



Function

Comfort | Stand-by | Night mode | Frost protection | Specified temperature | Time | Date | Heating | Cooling | Fan Coil operation for heating and cooling | Light scenes | Light scene extension unit | Value | Logic function (including light scenes)

Features

Labellable switch rockers | Anti-theft protection | Display illumination | Colour concept

05



Function

10 freely programmable IR channels | Switching | Dimming | Blinds | Button | Light scenes | Light scene extension unit | Value | Logic function (including light scenes)

Features

Labellable switch rockers | Anti-theft protection | Display illumination | Colour concept

06



Function

4 channels | Logic function (including light scenes)

07



Function

4 channels | Logic function (including light scenes)

ABB i-bus® KNX

User Operation – Design Ranges – Multifunction Control Elements

Control Element, Multi-function/colour concept

For BCU 6120/12-101-500 or 6120/13-500. With labelling field. Support of KNX functions through innovative colour concept or standard illumination red/green. Push switch function: switching/dimming/blind/sending values/scenes etc. Transparent labelling sheet with standard symbols included in delivery. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Display elements: Two LED per rocker via separate communication object for status (Red/Green/OFF) or orientation light.



6125/02



6126/02



6127/02

Pack unit pc.	Weight 1 pc. kg	Description	Control element, 1/2-fold Multi-function/colour concept			Control element, 2/4-fold Multi-function/colour concept			Control element, 4/8-fold Multi-function/colour concept		
			With 1 Control element: rocker switch left/right			With 2 Control elements: rocker switch left/right			With 4 Control elements: rocker switch left/right		
			Order details		Price 1 pc.	Order details		Price 1 pc.	Order details		Price 1 pc.
			Type	Order code	€	Type	Order code	€	Type	Order code	€
		future® linear									
1		anthracite	6125/02-81-500	2CKA006115A0216		6126/02-81-500	2CKA006116A0206		6127/02-81-500	2CKA006117A0232	
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		aluminium silver ¹⁾	6125/02-83-500	2CKA006115A0218		6126/02-83-500	2CKA006116A0208		6127/02-83-500	2CKA006117A0234	
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
1		studio white, matt ¹⁾	6125/02-884-500	2CKA006115A0226		6126/02-884-500	2CKA006116A0216		6127/02-884-500	2CKA006117A0242	
1		black, matt ¹⁾	6125/02-885-500	2CKA006115A0227		6126/02-885-500	2CKA006116A0217		6127/02-885-500	2CKA006117A0243	
		solo®									
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
		carat®									
1		anthracite	6125/02-81-500	2CKA006115A0216		6126/02-81-500	2CKA006116A0206		6127/02-81-500	2CKA006117A0232	
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
		pure stainless steel ¹⁾									
1		stainless steel	6125/02-866-500	2CKA006115A0223		6126/02-866-500	2CKA006116A0213		6127/02-866-500	2CKA006117A0239	
		Busch-axcent®									
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
		Dynasty®									
1		anthracite	6125/02-81-500	2CKA006115A0216		6126/02-81-500	2CKA006116A0206		6127/02-81-500	2CKA006117A0232	
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		antique brass	6125/02-840-500	2CKA006115A0452		6126/02-840-500	2CKA006116A0227		6127/02-840-500	2CKA006117A0252	

¹⁾ Surface painted



6129/01

Control Element, 3/6-fold, multifunction, with IR-Interface, FM

suitable for KNX bus coupler 6120/12-101-500 and 6120/13-500. With IR interface for Busch-remote controllers 6010-25 or 6020-.../6021-... . Push button function: switching/dimming/blind/value sending/light scenes/step-type switch functions. Switch contacts left/right. Two freely programmable RGB LEDs per rocker. With RGB colour code concept or red/green/OFF-operation. With labeling field. Transparent labeling sheet with standard symbols included in delivery.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	6129/01-81-500	2CKA006135A0156		0.08	1
savanne/ivory	–	6129/01-82-500	2CKA006135A0157		0.08	1
aluminium silver ¹⁾	–	6129/01-83-500	2CKA006135A0158		0.08	1
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1
studio white, matt ¹⁾	–	6129/01-884-500	2CKA006135A0165		0.08	1
black, matt ¹⁾	–	6129/01-885-500	2CKA006135A0166		0.08	1
solo®						
savanne/ivory	–	6129/01-82-500	2CKA006135A0157		0.08	1
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1
carat®						
anthracite	–	6129/01-81-500	2CKA006135A0156		0.08	1
savanne/ivory	–	6129/01-82-500	2CKA006135A0157		0.08	1
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1
pure stainless steel ¹⁾						
stainless steel	–	6129/01-866-500	2CKA006135A0162		0.08	1
Busch-axcent®						
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1

¹⁾ Surface painted

ABB i-bus® KNX

User Operation – Design Ranges – Movement Detectors



64765-81-500

Busch-Comfortswitch® flex Control Element Movement sensor with LED Orientation light

Control element with movement detector. For switching lighting systems that depend on brightness and movement. With select lens, prevents detection of smaller animal. Push switch function possible at all times. With notice LED when manual operation is necessary. Extension of the detection range by main unit/extension unit combination. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Additional activation/deactivation option via push-button input on the flush-mounted insert. Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off. Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off. Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function. Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments. Switch off delay: 1 to 10 min., adjustable.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	64765-81-500	2CKA006800A2883			1
ivory	–	64765-82-500	2CKA006800A2885			1
aluminium silver	–	64765-83-500	2CKA006800A2887			1
studio white	–	64765-84-500	2CKA006800A2889			1
studio white matt	–	64765-884-500	2CKA006800A2893			1
black, matt	–	64765-885-500	2CKA006800A2895			1
solo®						
ivory	–	64765-82-500	2CKA006800A2885			1
studio white	–	64765-84-500	2CKA006800A2889			1
Busch-axcent						
studio white	–	64765-84-500	2CKA006800A2889			1
pure stainless steel						
stainless steel	–	64765-866-500	2CKA006800A2898			1
carat®						
anthracite	–	64765-81-500	2CKA006800A2883			1
ivory	–	64765-82-500	2CKA006800A2885			1
studio white	–	64765-84-500	2CKA006800A2889			1
Dynasty®						
anthracite	–	64765-81-500	2CKA006800A2883			1
ivory	–	64765-82-500	2CKA006800A2885			1
antique brass	–	64765-840-500	2CKA006800A2896			1



64764-81-500

Busch-Watchdog 180 flex Multi sensor with select lens Movement sensor white

Movement detector with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
				€	kg	pc.
future® linear						
anthracite	–	64764-81-500	2CKA006800A2995			1
ivory	–	64764-82-500	2CKA006800A2997			1
aluminium silver	–	64764-83-500	2CKA006800A2999			1
studio white	–	64764-84-500	2CKA006800A3001			1
studio white matt	–	64764-884-500	2CKA006800A3005			1
black, matt	–	64764-885-500	2CKA006800A3007			1
solo®						
ivory	–	64764-82-500	2CKA006800A2997			1
studio white	–	64764-84-500	2CKA006800A3001			1
Busch-axcent						
studio white	–	64764-84-500	2CKA006800A3001			1
pure stainless steel						
stainless steel	–	64764-866-500	2CKA006800A3010			1
carat®						
anthracite	–	64764-81-500	2CKA006800A2995			1
ivory	–	64764-82-500	2CKA006800A2997			1
studio white	–	64764-84-500	2CKA006800A3001			1
Dynasty®						
anthracite	–	64764-81-500	2CKA006800A2995			1
ivory	–	64764-82-500	2CKA006800A2997			1
antique brass	–	64764-840-500	2CKA006800A3008			1
ABB SAGA						
studio white	–	64764-916-510	2CKA006800A3059			1

ABB i-bus® KNX

User Operation – Design Ranges – Movement Detectors



64762-81-500

Busch-Watchdog 180 flex Comfort sensor with select lens Movement sensor white

Movement detector with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec – 30 min or short-time pulse 1 sec adjustable.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code			
future® linear						
anthracite	–	64762-81-500	2CKA006800A2958			1
ivory	–	64762-82-500	2CKA006800A2960			1
aluminium silver	–	64762-83-500	2CKA006800A2962			1
studio white	–	64762-84-500	2CKA006800A2964			1
studio white matt	–	64762-884-500	2CKA006800A2968			1
black, matt	–	64762-885-500	2CKA006800A2970			1
solo®						
ivory	–	64762-82-500	2CKA006800A2960			1
studio white	–	64762-84-500	2CKA006800A2964			1
Busch-axcent						
studio white	–	64762-84-500	2CKA006800A2964			1
pure stainless steel						
stainless steel	–	64762-866-500	2CKA006800A2973			1
carat®						
anthracite	–	64762-81-500	2CKA006800A2958			1
ivory	–	64762-82-500	2CKA006800A2960			1
studio white	–	64762-84-500	2CKA006800A2964			1
Dynasty®						
anthracite	–	64762-81-500	2CKA006800A2958			1
ivory	–	64762-82-500	2CKA006800A2960			1
antique brass	–	64762-840-500	2CKA006800A2971			1



BA/U1.0.1

Bus Coupling Unit KNX

KNX bus coupling unit for Busch-Comfortswitch, Busch-Watchdog 180 flex with multilense and Busch-Watchdog 180 flex Comfort sensor with select lens.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1



6122/10-84-500


Busch-Watchdog® 180 Sensor Standard, Select with integrated bus coupler, FM

Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated KNX bus coupler.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	6122/10-212-500	2CKA006132A0373		0.08	1
alpine white	–	6122/10-214-500	2CKA006132A0374		0.08	1
future® linear						
anthracite	–	6122/10-81-500	2CKA006132A0376		0.08	1
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
aluminium silver	–	6122/10-83-500	2CKA006132A0378		0.08	1
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
studio white matt	–	6122/10-884-500	2CKA006132A0380		0.08	1
black, matt	–	6122/10-885-500	2CKA006132A0381		0.08	1
solo®						
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
Busch-axcent®						
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
pure stainless steel						
stainless steel	–	6122/10-866-500	2CKA006132A0385		0.08	1
carat®						
anthracite	–	6122/10-81-500	2CKA006132A0376		0.08	1
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
Dynasty®						
anthracite	–	6122/10-81-500	2CKA006132A0376		0.08	1
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
antique brass	–	6122/10-840-500	2CKA006132A0407		0.08	1

ABB i-bus® KNX

User Operation – Design Ranges – Room Thermostats



6128/28-884-500

Room Thermostat with Display and 2/4-fold Switch Sensor, FM

For ABB i-bus® KNX bus coupler 6120/12-101-500, 6120/13-500. Support of KNX functions through innovative colour concept (yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). Master/slave configuration. With base-load operation. The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Transparent labelling sheet with standard symbols included in delivery. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Control element: Switch contacts left/right, also for selecting setpoint and mode of operation Display elements: LCD showing operation mode and temperature. Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C. Dimensions (L x W x D): 63 mm x 63 mm.

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
				€	kg	pc.
future® linear						
anthracite	–	6128/28-81-500	2CKA006134A0331		0.076	1
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
aluminium silver	–	6128/28-83-500	2CKA006134A0333		0.076	1
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
studio white, matt	–	6128/28-884-500	2CKA006134A0338		0.076	1
black, matt	–	6128/28-885-500	2CKA006134A0339		0.076	1
solo®						
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
carat®						
anthracite	–	6128/28-81-500	2CKA006134A0331		0.076	1
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
pure stainless steel						
stainless steel	–	6128/28-866-500	2CKA006134A0335		0.076	1
Busch-axcent®						
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
Dynasty®						
anthracite	–	6128/28-81-500	2CKA006134A0331		0.076	1
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
antique brass	–	6128/28-840-500	2CKA006134A0342		0.076	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames



1721-184K

future® linear

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, anthracite	–	1721-181K	2CKA001754A4240		0.024	10
1-fold, savanna/ivory	–	1721-182K-500	2CKA001754A4506		0.024	10
1-fold, aluminium silver ¹⁾	–	1721-183K-500	2CKA001754A4529		0.024	10
1-fold, davos/studio white	–	1721-184K-500	2CKA001754A4498		0.024	10
1-fold, studio white, matt ¹⁾	–	1721-884K-500	2CKA001754A4531		0.024	10
1-fold, black matt ¹⁾	–	1721-885K-500	2CKA001754A4532		0.024	10
2-fold, anthracite	–	1722-181K	2CKA001754A4241		0.041	10
2-fold, savanna/ivory	–	1722-182K	2CKA001754A4231		0.041	10
2-fold, aluminium silver ¹⁾	–	1722-183K-500	2CKA001754A4530		0.04	10
2-fold, davos/studio white	–	1722-184K-500	2CKA001754A4499		0.041	10
2-fold, studio white, matt ¹⁾	–	1722-884K	2CKA001754A4415		0.037	10
2-fold, black matt ¹⁾	–	1722-885K-500	2CKA001754A4534		0.037	10
3-fold, anthracite	–	1723-181K	2CKA001754A4242		0.05	10
3-fold, savanna/ivory	–	1723-182K	2CKA001754A4232		0.05	10
3-fold, aluminium silver ¹⁾	–	1723-183K-500	2CKA001754A4533		0.052	10
3-fold, davos/studio white	–	1723-184K-500	2CKA001754A4502		0.053	10
3-fold, studio white, matt ¹⁾	–	1723-884K	2CKA001754A4416		0.052	10
3-fold, black matt ¹⁾	–	1723-885K	2CKA001754A4421		0.052	10
4-fold, anthracite	–	1724-181K	2CKA001754A4243		0.064	10
4-fold, savanna/ivory	–	1724-182K	2CKA001754A4233		0.064	10
4-fold, aluminium silver ¹⁾	–	1724-183K	2CKA001754A4309		0.064	10
4-fold, davos/studio white	–	1724-184K	2CKA001754A4238		0.064	10
4-fold, studio white, matt ¹⁾	–	1724-884K	2CKA001754A4417		0.064	10
4-fold, black matt ¹⁾	–	1724-885K	2CKA001754A4422		0.064	10
5-fold, anthracite	–	1725-181K	2CKA001754A4244		0.096	1
5-fold, savanna/ivory	–	1725-182K	2CKA001754A4234		0.114	1
5-fold, aluminium silver ¹⁾	–	1725-183K	2CKA001754A4310		0.114	1
5-fold, davos/studio white	–	1725-184K-500	2CKA001754A4517		0.112	1
5-fold, studio white, matt ¹⁾	–	1725-884K	2CKA001754A4418		0.114	1
5-fold, black matt ¹⁾	–	1725-885K	2CKA001754A4423		0.114	1

¹⁾ Surface painted

ABB i-bus® KNX

User Operation – Design Ranges – Frames



1721-80

solo®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, chrome, matt	–	1721-80-500	2CKA001754A4535		0.032	10
1-fold, chrome, glossy	–	1721-80G-500	2CKA001754A4538		0.032	10
1-fold, davos/studio white	–	1721-84-500	2CKA001754A4536		0.032	10
2-fold, chrome, matt	–	1722-80-500	2CKA001754A4537		0.055	10
2-fold, chrome, glossy	–	1722-80G	2CKA001754A4327		0.045	10
2-fold, davos/studio white	–	1722-84-500	2CKA001754A4539		0.055	10
3-fold, chrome, matt	–	1723-80-500	2CKA001754A4540		0.066	10
3-fold, chrome, glossy	–	1723-80G	2CKA001754A4328		0.073	10
3-fold, davos/studio white	–	1723-84-500	2CKA001754A4541		0.073	10
4-fold, chrome, matt	–	1724-80	2CKA001754A4107		0.12	1
4-fold, chrome, glossy	–	1724-80G	2CKA001754A4329		0.12	1
4-fold, davos/studio white	–	1724-84	2CKA001754A4112		0.12	1
5-fold, chrome, matt	–	1725-80	2CKA001754A4108		0.14	1
5-fold, chrome, glossy	–	1725-80G	2CKA001754A4330		0.14	1
5-fold, davos/studio white	–	1725-84	2CKA001754A4113		0.14	1



1721-860

carat®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, white glass	–	1721-811	2CKA001754A4442		0.161	1
1-fold, bronze	–	1721-821	2CKA001754A4258		0.38	1
1-fold, gold ¹⁾	–	1721-823-101	2CKA001754A4356		0.34	1
1-fold, glass black	–	1721-825	2CKA001754A4322		0.16	1
1-fold, chrome	–	1721-826-101	2CKA001754A4360		0.335	1
1-fold, stainless steel	–	1721-860	2CKA001754A4254		0.34	1
2-fold, white glass	–	1722-811	2CKA001754A4443		0.234	1
2-fold, bronze	–	1722-821	2CKA001754A4259		0.559	1
2-fold, gold ¹⁾	–	1722-823-101	2CKA001754A4357		0.5	1
2-fold, glass black	–	1722-825	2CKA001754A4323		0.24	1
2-fold, chrome	–	1722-826-101	2CKA001754A4361		0.5	1
2-fold, stainless steel	–	1722-860	2CKA001754A4255		0.48	1
3-fold, white glass	–	1723-811	2CKA001754A4444		0.312	1
3-fold, bronze	–	1723-821	2CKA001754A4260		0.678	1
3-fold, gold ¹⁾	–	1723-823-101	2CKA001754A4358		0.66	1
3-fold, glass black	–	1722-825	2CKA001754A4323		0.24	1
3-fold, chrome	–	1723-826-101	2CKA001754A4362		0.66	1
3-fold, stainless steel	–	1723-860	2CKA001754A4256		0.6	1
4-fold, white glass	–	1724-811	2CKA001754A4445		0.388	1
4-fold, bronze	–	1724-821	2CKA001754A4261		0.816	1
4-fold, gold ¹⁾	–	1724-823-101	2CKA001754A4359		0.8	1
4-fold, glass black	–	1724-825	2CKA001754A4325		0.4	1
4-fold, chrome	–	1724-826-101	2CKA001754A4363		0.82	1
4-fold, stainless steel	–	1724-860	2CKA001754A4257		0.758	1

¹⁾ Gold plated 24 carat

1721-866K

pure stainless steel

For vertical and horizontal installation. Stainless steel material.

Anti-fingerprint (does not leave any visible fingerprints on the material).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, stainless steel	–	1721-866K-500	2CKA001754A4500		0.038	10
2-fold, stainless steel	–	1722-866K-500	2CKA001754A4501		0.064	10
3-fold, stainless steel	–	1723-866K	2CKA001754A4319		0.083	10
4-fold, stainless steel	–	1724-866K	2CKA001754A4320		0.14	1
5-fold, stainless steel	–	1725-866K	2CKA001754A4321		0.175	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames



1722-283

axcent®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, platinum	–	1721-270	2CKA001754A4683		0.049	1
1-fold, black mat	–	1721-275	2CKA001754A4703		0.049	1
1-fold, titanium	–	1721-276	2CKA001754A4693		0.049	1
1-fold, black	–	1721-281	2CKA001754A4409		0.041	10
1-fold, davos/studio white	–	1721-284	2CKA001754A4331		0.038	10
1-fold, yellow	–	1721-285	2CKA001754A4334		0.041	10
1-fold, green	–	1721-286	2CKA001754A4337		0.041	10
1-fold, red	–	1721-287	2CKA001754A4340		0.041	10
1-fold, blue	–	1721-288	2CKA001754A4343		0.041	10
1-fold, white glass	–	1721-280	2CKA001754A4437		0.095	1
1-fold, entrée-grey	–	1721-291-500	2CKA001754A4471		0.041	10
2-fold, platinum	–	1722-270	2CKA001754A4684		0.073	1
2-fold, black mat	–	1722-275	2CKA001754A4704		0.073	1
2-fold, titanium	–	1722-276	2CKA001754A4694		0.073	1
2-fold, black	–	1722-281	2CKA001754A4410		0.054	10
2-fold, davos/studio white	–	1722-284	2CKA001754A4332		0.055	10
2-fold, yellow	–	1722-285	2CKA001754A4335		0.055	10
2-fold, green	–	1722-286	2CKA001754A4338		0.055	10
2-fold, red	–	1722-287	2CKA001754A4341		0.055	10
2-fold, blue	–	1722-288	2CKA001754A4344		0.055	10
2-fold, white glass	–	1722-280	2CKA001754A4438		0.115	1
2-fold, entrée-grey	–	1722-291-500	2CKA001754A4472		0.055	10
2-fold, maison-beige	–	1722-299-500	2CKA001754A4482		0.055	10
3-fold, platinum	–	1723-270	2CKA001754A4685		0.100	1
3-fold, black mat	–	1723-275	2CKA001754A4705		0.100	1
3-fold, titanium	–	1723-276	2CKA001754A4695		0.100	1
3-fold, black	–	1723-281	2CKA001754A4411		0.073	10
3-fold, davos/studio white	–	1723-284	2CKA001754A4333		0.073	10
3-fold, yellow	–	1723-285	2CKA001754A4336		0.073	10
3-fold, green	–	1723-286	2CKA001754A4339		0.073	10
3-fold, red	–	1723-287	2CKA001754A4342		0.073	10
3-fold, blue	–	1723-288	2CKA001754A4345		0.073	10
3-fold, white glass	–	1723-280	2CKA001754A4439		0.261	1
3-fold, entrée-grey	–	1723-291-500	2CKA001754A4473		0.073	10
3-fold, maison-beige	–	1723-299-500	2CKA001754A4483		0.073	10

Continuation of table "axcent" on next page

Continuation of table “axcent”

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, platinum	–	1724-270	2CKA001754A4686		0.126	1
4-fold, black mat	–	1724-275	2CKA001754A4706		0.126	1
4-fold, titanium	–	1724-276	2CKA001754A4696		0.126	1
4-fold, black	–	1724-281	2CKA001754A4412		0.117	1
4-fold, davos/studio white	–	1724-284	2CKA001754A4346		0.117	1
4-fold, yellow	–	1724-285	2CKA001754A4348		0.117	1
4-fold, green	–	1724-286	2CKA001754A4350		0.117	1
4-fold, red	–	1724-287	2CKA001754A4352		0.117	1
4-fold, blue	–	1724-288	2CKA001754A4354		0.117	1
4-fold, white glass	–	1724-280	2CKA001754A4440		0.328	1
4-fold, entrée-grey	–	1724-291-500	2CKA001754A4474		0.117	1
4-fold, maison-beige		1724-299-500	2CKA001754A4484		0.117	1
5-fold, platinum	–	1725-270	2CKA001754A4687		0.150	1
5-fold, black mat	–	1725-275	2CKA001754A4707		0.150	1
5-fold, titanium	–	1725-276	2CKA001754A4697		0.150	1
5-fold, black	–	1725-281	2CKA001754A4413		0.145	1
5-fold, davos/studio white	–	1725-284	2CKA001754A4347		0.145	1
5-fold, yellow	–	1725-285	2CKA001754A4349		0.145	1
5-fold, green	–	1725-286	2CKA001754A4351		0.145	1
5-fold, red	–	1725-287	2CKA001754A4353		0.145	1
5-fold, blue	–	1725-288	2CKA001754A4355		0.145	1
5-fold, white glass	–	1725-280	2CKA001754A4441		0.38	1
5-fold, entrée-grey	–	1725-291-500	2CKA001754A4475		0.145	1
5-fold, maison-beige	–	1725-299-500	2CKA001754A4485		0.145	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames



1721-838-500

Dynasty®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, polished brass ivory	–	1721-838-500	2CKA001754A4560		0.28	1
1-fold, polished brass anthracite	–	1721-835-500	2CKA001754A4565		0.28	1
1-fold, polished brass decor ivory	–	1721-836-500	2CKA001754A4570		0.28	1
1-fold, polished brass decor anthracite	–	1721-833-500	2CKA001754A4575		0.286	1
1-fold, antique brass ivory	–	1721-848-500	2CKA001754A4580		0.28	1
1-fold, antique brass anthracite	–	1721-845-500	2CKA001754A4585		0.3	1
1-fold, antique brass decor ivory	–	1721-846-500	2CKA001754A4590		0.3	1
1-fold, antique brass decor anthracite	–	1721-843-500	2CKA001754A4595		0.3	1
1-fold, ivory	–	1721-832-500	2CKA001754A4600		0.042	1
1-fold, anthracite	–	1721-831-500	2CKA001754A4605		0.042	1
2-fold, polished brass ivory	–	1722-838-500	2CKA001754A4561		0.42	1
2-fold, polished brass anthracite	–	1722-835-500	2CKA001754A4566		0.42	1
2-fold, polished brass decor ivory	–	1722-836-500	2CKA001754A4571		0.42	1
2-fold, polished brass decor anthracite	–	1722-833-500	2CKA001754A4576		0.42	1
2-fold, antique brass ivory	–	1722-848-500	2CKA001754A4581		0.44	1
2-fold, antique brass anthracite	–	1722-845-500	2CKA001754A4586		0.44	1
2-fold, antique brass decor ivory	–	1722-846-500	2CKA001754A4591		0.42	1
2-fold, antique brass decor anthracite	–	1722-843-500	2CKA001754A4596		0.44	1
2-fold, ivory	–	1722-832-500	2CKA001754A4601		0.064	1
2-fold, anthracite	–	1722-831-500	2CKA001754A4606		0.064	1
3-fold, polished brass ivory	–	1723-838-500	2CKA001754A4562		0.54	1
3-fold, polished brass anthracite	–	1723-835-500	2CKA001754A4567		0.54	1
3-fold, polished brass decor ivory	–	1723-836-500	2CKA001754A4572		0.56	1
3-fold, polished brass decor anthracite	–	1723-833-500	2CKA001754A4577		0.56	1
3-fold, antique brass ivory	–	1723-848-500	2CKA001754A4582		0.56	1
3-fold, antique brass anthracite	–	1723-845-500	2CKA001754A4587		0.54	1
3-fold, antique brass decor ivory	–	1723-846-500	2CKA001754A4592		0.56	1
3-fold, antique brass decor anthracite	–	1723-843-500	2CKA001754A4597		0.56	1
3-fold, ivory	–	1723-832-500	2CKA001754A4602		0.096	1
3-fold, anthracite	–	1723-831-500	2CKA001754A4607		0.096	1

Continuation of table "Dynasty®" on next page

Continuation of table “Dynasty®”

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, polished brass ivory	–	1724-838-500	2CKA001754A4563		0.7	1
4-fold, polished brass anthracite	–	1724-835-500	2CKA001754A4568		0.7	1
4-fold, polished brass decor ivory	–	1724-836-500	2CKA001754A4573		0.7	1
4-fold, polished brass decor anthracite	–	1724-833-500	2CKA001754A4578		0.7	1
4-fold, antique brass ivory	–	1724-848-500	2CKA001754A4583		0.72	1
4-fold, antique brass anthracite	–	1724-845-500	2CKA001754A4588		0.7	1
4-fold, antique brass decor ivory	–	1724-846-500	2CKA001754A4593		0.7	1
4-fold, antique brass decor anthracite	–	1724-843-500	2CKA001754A4598		0.72	1
4-fold, ivory	–	1724-832-500	2CKA001754A4603		0.28	1
4-fold, anthracite	–	1724-831-500	2CKA001754A4608		0.28	1
5-fold, polished brass ivory	–	1725-838-500	2CKA001754A4564		0.82	1
5-fold, polished brass anthracite	–	1725-835-500	2CKA001754A4569		0.82	1
5-fold, polished brass decor ivory	–	1725-836-500	2CKA001754A4574		0.82	1
5-fold, polished brass decor anthracite	–	1725-833-500	2CKA001754A4579		0.82	1
5-fold, antique brass ivory	–	1725-848-500	2CKA001754A4584		0.84	1
5-fold, antique brass anthracite	–	1725-845-500	2CKA001754A4589		0.82	1
5-fold, antique brass decor ivory	–	1725-846-500	2CKA001754A4594		0.84	1
5-fold, antique brass decor anthracite	–	1725-843-500	2CKA001754A4599		0.84	1
5-fold, ivory	–	1725-832-500	2CKA001754A4604		0.34	1
5-fold, anthracite	–	1725-831-500	2CKA001754A4609		0.34	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames



1721-45M-500

Busch-art linear®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, studio white	–	1721-44G-500	2CKA001754A4841		0,014	10
1-fold, studio white matt	–	1721-44M-500	2CKA001754A4842		0,014	10
1-fold, black matt	–	1721-45M-500	2CKA001754A4844		0,014	10
1-fold, glass black/gold	–	1721-4013	2CKA001754A4882		0,035	1
1-fold, glass blue	–	1721-4028	2CLA897100A3958		0,036	1
1-fold, aluminium silver	–	1721-4073	2CLA897100A1758		0,046	1
1-fold, wood oak	–	1721-4083	2CKA001754A4887		0,039	1
1-fold, wood walnut	–	1721-4086	2CKA001754A4892		0,038	1
1-fold, slate terra rosso	–	1721-4097	2CLA897100A2958		0,019	1
2-fold, studio white	–	1722-44G-500	2CKA001754A4849		0,023	10
2-fold, studio white matt	–	1722-44M-500	2CKA001754A4850		0,023	10
2-fold, black matt	–	1722-45M-500	2CKA001754A4852		0,023	10
2-fold, glass black/gold	–	1722-4013	2CKA001754A4883		0,055	1
2-fold, glass blue	–	1722-4028	2CLA897200A3958		0,060	1
2-fold, aluminium silver	–	1722-4073	2CLA897200A1758		0,072	1
2-fold, wood oak	–	1722-4083	2CKA001754A4888		0,055	1
2-fold, wood walnut	–	1722-4086	2CKA001754A4893		0,082	1
2-fold, slate terra rosso	–	1722-4097	2CLA897200A2958		0,055	1
3-fold, studio white	–	1723-44G-500	2CKA001754A4857		0,032	10
3-fold, studio white matt	–	1723-44M-500	2CKA001754A4858		0,032	10
3-fold, black matt	–	1723-45M-500	2CKA001754A4860		0,032	10
3-fold, glass black/gold	–	1723-4013	2CKA001754A4884		0,075	1
3-fold, glass blue	–	1723-4028	2CLA897300A3958		0,085	1
3-fold, aluminium silver	–	1723-4073	2CLA897300A1758		0,098	1
3-fold, wood oak	–	1723-4083	2CKA001754A4889		0,075	1
3-fold, wood walnut	–	1723-4086	2CKA001754A4894		0,075	1
3-fold, slate terra rosso	–	1723-4097	2CLA897300A2958		0,043	1
4-fold, studio white	–	1724-44G-500	2CKA001754A4865		0,042	1
4-fold, studio white matt	–	1724-44M-500	2CKA001754A4866		0,042	1
4-fold, black matt	–	1724-45M-500	2CKA001754A4868		0,042	1
4-fold, glass black/gold	–	1724-4013	2CKA001754A4885		0,110	1
4-fold, glass blue	–	1724-4028	2CLA897400A3958		0,108	1
4-fold, aluminium silver	–	1724-4073	2CLA897400A1758		0,128	1
4-fold, wood oak	–	1724-4083	2CKA001754A4890		0,100	1
4-fold, wood walnut	–	1724-4086	2CKA001754A4895		0,100	1
4-fold, slate terra rosso	–	1724-4097	2CLA897400A2958		0,094	1
5-fold, studio white	–	1725-44G-500	2CKA001754A4873		0,050	1
5-fold, studio white matt	–	1725-44M-500	2CKA001754A4874		0,050	1
5-fold, black matt	–	1725-45M-500	2CKA001754A4876		0,050	1
5-fold, glass black/gold	–	1725-4013	2CKA001754A4886		0,150	1
5-fold, glass blue	–	1725-4028	2CLA897500A3958		0,176	1
5-fold, aluminium silver	–	1725-4073	2CLA897500A1758		0,153	1
5-fold, wood oak	–	1725-4083	2CKA001754A4891		0,126	1
5-fold, wood walnut	–	1725-4086	2CKA001754A4896		0,125	1
5-fold, slate terra rosso	–	1725-4097	2CLA897500A2958		0,072	1

**1721-441M-500****Busch-art linear® with decor ring**

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, studio white matt/ rose gold	–	1721-441M-500	2CKA001754A4905		0,015	10
1-fold, black matt/gold	–	1721-453M-500	2CKA001754A4906		0,015	10
1-fold, black matt/chrome	–	1721-456M-500	2CKA001754A4907		0,015	10
2-fold, studio white matt/ rose gold	–	1722-441M-500	2CKA001754A4911		0,024	10
2-fold, black matt/gold	–	1722-453M-500	2CKA001754A4912		0,027	10
2-fold, black matt/chrome	–	1722-456M-500	2CKA001754A4913		0,024	10
3-fold, studio white matt/ rose gold	–	1723-441M-500	2CKA001754A4917		0,027	10
3-fold, black matt/gold	–	1723-453M-500	2CKA001754A4918		0,034	10
3-fold, black matt/chrome	–	1723-456M-500	2CKA001754A4919		0,034	10
4-fold, studio white matt/ rose gold	–	1724-441M-500	2CKA001754A4923		0,043	1
4-fold, black matt/gold	–	1724-453M-500	2CKA001754A4924		0,043	1
4-fold, black matt/chrome	–	1724-456M-500	2CKA001754A4925		0,043	1
5-fold, studio white matt/ rose gold	–	1725-441M-500	2CKA001754A4929		0,053	1
5-fold, black matt/gold	–	1725-453M-500	2CKA001754A4930		0,053	1
5-fold, black matt/chrome	–	1725-456M-500	2CKA001754A4931		0,099	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit

The push-button coupling unit with a centre position offers maximum flexibility. Installed in a flush-mounted wall box, it accepts switch rockers from

conventional switch ranges* like a completely standard flush-mounted insert. Covers from all conventional ranges can now be used for KNX. This

offers maximum freedom in the selection of the switch range and makes retrofitting easier.

01




02



03



04



Features

Easy mounting and uncomplicated commissioning

All flush-mounted switch ranges* can be used for the ABB i-bus® KNX

Affordable solution for renovations

Status/orientation light (red/green/OFF)

(only with 1 gang push-button/switches)

Integration in surface-mounted water protected units

01 Push-button coupler 2 gang with integrated bus coupler

02 Push-button coupler 4 gang with integrated bus coupler

03 Push-button coupler 2 gang for ocean with integrated bus coupler

04 Push-button coupler 4 gang for ocean with integrated bus coupler



Design without limits. The push-button coupling unit includes the complete range* of switches for KNX. Switch rockers from all switch ranges can now be converted to KNX push buttons, which not only switch on and off but also dim or show the status with an LED (6108/01 and 6108/04 only). 1 gang and 2 gang models for single and 2 gang switch rockers are available.

KNX – water protected

The push-button coupling unit also allows special products to be used for KNX. Special models for water-protected installation allow covers from, for example, the ocean® surface-mounted range to be used. This means that KNX sensors can also be safely installed in a cellar, outside on a patio or in commercial applications. Temperature range: –25 °C to +45 °C.

*except impuls, basic55® and All Weather 44 Busch-Jaeger switch ranges only available for selected markets. For further information please contact your local ABB office.



6108/06-AP-500

Push-button coupler 2 gang with integrated bus coupler

For contacting conventional 1 gang rocker switches. With middle position. For inserting in the ocean surface-mounted housing. Enclosed mounting plate for the following ranges: Busch-Duro 2000 SI/SI Linear, Reflex SI/SI Linear, future® linear, alpha, solo®, Busch-axcent®, carat® and pure stainless steel. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1/2-fold	–	6108/06-AP-500	2CKA006133A0225		0.1	1
2/4-fold	–	6108/07-AP-500	2CKA006133A0227		0.091	1



6108/06-500


Push-button coupler 2 gang with integrated bus coupler

For contacting 1 gang rocker 6230-10-xxx, 6231-10-xxx, 6232-10-xxx, 6233-10-xxx und 6234-10-xxx. With integrated temperature sensor. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With middle position. The bus connection is provided via the enclosed bus terminal.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/06-500	2CKA006133A0221		0.06	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit



SR-1-84

Rocker 1 gang, without printing

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SR-1-212	2CKA006220A0182		0.017	1
alpine white	–	SR-1-214	2CKA006220A0183		0.017	1
future® linear						
anthracite	–	SR-1-81	2CKA006220A0137		0.017	1
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
aluminium silver	–	SR-1-83	2CKA006220A0138		0.017	1
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
studio white matt	–	SR-1-884	2CKA006220A0601		0.018	1
black, matt	–	SR-1-885	2CKA006220A0618		0.018	1
solo®						
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
grey metallic	–	SR-1-803	2CKA006220A0550		0.018	1
Busch-axcent®						
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
pure stainless steel						
stainless steel	–	SR-1-866	2CKA006220A0533		0.016	1
carat®						
anthracite	–	SR-1-81	2CKA006220A0137		0.017	1
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
Dynasty®						
anthracite	–	SR-1-81	2CKA006220A0137		0.017	1
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
antique brass	–	SR-1-840	2CKA006220A0371		0.018	1

**SRL-1-84****Rocker 1 gang, with “Light” icon**

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRL-1-212	2CKA006220A0184		0.013	1
alpine white	–	SRL-1-214	2CKA006220A0185		0.013	1
future® linear						
anthracite	–	SRL-1-81	2CKA006220A0140		0.017	1
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
aluminium silver	–	SRL-1-83	2CKA006220A0141		0.017	1
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
studio white matt	–	SRL-1-884	2CKA006220A0602		0.018	1
black, matt	–	SRL-1-885	2CKA006220A0619		0.018	1
solo®						
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
grey metallic	–	SRL-1-803	2CKA006220A0551		0.018	1
Busch-axcent®						
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
pure stainless steel						
stainless steel	–	SRL-1-866	2CKA006220A0534		0.014	1
carat®						
anthracite	–	SRL-1-81	2CKA006220A0140		0.017	1
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
Dynasty®						
anthracite	–	SRL-1-81	2CKA006220A0140		0.017	1
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
antique brass	–	SRL-1-840	2CKA006220A0372		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit




SRB-1-84

Rocker 1 gang, with “Blind” icon

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRB-1-212	2CKA006220A0186		0.013	1
alpine white	–	SRB-1-214	2CKA006220A0187		0.013	1
future® linear						
anthracite	–	SRB-1-81	2CKA006220A0143		0.013	1
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
aluminium silver	–	SRB-1-83	2CKA006220A0144		0.017	1
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
studio white matt	–	SRB-1-884	2CKA006220A0603		0.018	1
black, matt	–	SRB-1-885	2CKA006220A0620		0.018	1
solo®						
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
grey metallic	–	SRB-1-803	2CKA006220A0552		0.018	1
Busch-axcent®						
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
pure stainless steel						
stainless steel	–	SRB-1-866	2CKA006220A0535		0.014	1
carat®						
anthracite	–	SRB-1-81	2CKA006220A0143		0.013	1
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
Dynasty®						
anthracite	–	SRB-1-81	2CKA006220A0143		0.013	1
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
antique brass	–	SRB-1-840	2CKA006220A0373		0.018	1

**SRS-1-84****Rocker 1 gang, with “Scene” icon**

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRS-1-212	2CKA006220A0188		0.013	1
alpine white	–	SRS-1-214	2CKA006220A0189		0.013	1
future® linear						
anthracite	–	SRS-1-81	2CKA006220A0146		0.017	1
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
aluminium silver	–	SRS-1-83	2CKA006220A0147		0.017	1
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
studio white matt	–	SRS-1-884	2CKA006220A0604		0.018	1
black, matt	–	SRS-1-885	2CKA006220A0621		0.018	1
solo®						
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
grey metallic	–	SRS-1-803	2CKA006220A0553		0.015	1
Busch-axcent®						
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
pure stainless steel						
stainless steel	–	SRS-1-866	2CKA006220A0536		0.01	1
carat®						
anthracite	–	SRS-1-81	2CKA006220A0146		0.017	1
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
Dynasty®						
anthracite	–	SRS-1-81	2CKA006220A0146		0.017	1
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
antique brass	–	SRS-1-840	2CKA006220A0374		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit



SRD-1-84

Rocker 1 gang, with “Dimmer” icon

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRD-1-212	2CKA006220A0190		0.013	1
alpine white	–	SRD-1-214	2CKA006220A0191		0.013	1
future® linear						
anthracite	–	SRD-1-81	2CKA006220A0149		0.017	1
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
aluminium silver	–	SRD-1-83	2CKA006220A0150		0.017	1
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
studio white matt	–	SRD-1-884	2CKA006220A0605		0.018	1
black, matt	–	SRD-1-885	2CKA006220A0622		0.018	1
solo®						
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
grey metallic	–	SRD-1-803	2CKA006220A0554		0.018	1
Busch-axcent®						
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
pure stainless steel						
stainless steel	–	SRD-1-866	2CKA006220A0537		0.018	1
carat®						
anthracite	–	SRD-1-81	2CKA006220A0149		0.017	1
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
Dynasty®						
anthracite	–	SRD-1-81	2CKA006220A0149		0.017	1
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
antique brass	–	SRD-1-840	2CKA006220A0375		0.018	1



6108/07-500

Push-button coupling 4 gang with integrated bus coupler

Support of KNX functions through innovative colour concept yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. With middle position. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/07-500	2CKA006133A0223		0.075	1



SR-2-84



SRB-2-84

			Rocker 2 gang left/right, without printing			Rocker 2 gang left/right, with "Blind" icon		
			As cover for KNX 4 gang push-button coupling unit (6108/07-500).			As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
Pack unit pc.	Weight 1 pc. kg	Description	Order details			Order details		
			Type	Order code	Price 1 pc. €	Type	Order code	Price 1 pc. €
		Reflex SI						
		white	SR-2-212	2CKA006220A0192		SRB-2-212	2CKA006220A0196	
		alpine white	SR-2-214	2CKA006220A0193		SRB-2-214	2CKA006220A0197	
		future® linear						
		anthracite	SR-2-81	2CKA006220A0152		SRB-2-81	2CKA006220A0158	
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		aluminium silver	SR-2-83	2CKA006220A0153		SRB-2-83	2CKA006220A0159	
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		studio white matt	SR-2-884	2CKA006220A0606		SRB-2-884	2CKA006220A0608	
		black, matt	SR-2-885	2CKA006220A0623		SRB-2-885	2CKA006220A0625	
		solo®						
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		grey metallic	SR-2-803	2CKA006220A0555		SRB-2-803	2CKA006220A0557	
		Busch-axcent®						
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		pure stainless steel						
		stainless steel	SR-2-866	2CKA006220A0538		SRB-2-866	2CKA006220A0540	
		carat®						
		anthracite	SR-2-81	2CKA006220A0152		SRB-2-81	2CKA006220A0158	
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		Dynasty®						
		anthracite	SR-2-81	2CKA006220A0152		SRB-2-81	2CKA006220A0158	
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		antique brass	SR-2-840	2CKA006220A0376		SRB-2-840	2CKA006220A0378	

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit



SRL-2-L-84



SRL-2-R-84

			Rocker 2 gang left, with “Light” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).			Rocker 2 gang right, with “Light” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
Pack unit pc.	Weight 1 pc. kg	Description	Order details			Order details		
			Type	Order code	Price 1 pc. €	Type	Order code	Price 1 pc. €
		Reflex SI						
		white	SRL-2-L-212	2CKA006220A0194		SRL-2-R-212	2CKA006220A0202	
		alpine white	SRL-2-L-214	2CKA006220A0195		SRL-2-R-214	2CKA006220A0203	
		future® linear						
		anthracite	SRL-2-L-81	2CKA006220A0155		SRL-2-R-81	2CKA006220A0167	
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		aluminium silver	SRL-2-L-83	2CKA006220A0156		SRL-2-R-83	2CKA006220A0168	
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		studio white matt	SRL-2-L-884	2CKA006220A0607		SRL-2-R-884	2CKA006220A0612	
		black, matt	SRL-2-L-885	2CKA006220A0624		SRL-2-R-885	2CKA006220A0629	
		solo®						
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		grey metallic	SRL-2-L-803	2CKA006220A0556		SRL-2-R-803	2CKA006220A0561	
		Busch-axcent®						
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		pure stainless steel						
		stainless steel	SRL-2-L-866	2CKA006220A0539		SRL-2-R-866	2CKA006220A0544	
		carat®						
		anthracite	SRL-2-L-81	2CKA006220A0155		SRL-2-R-81	2CKA006220A0167	
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		Dynasty®						
		anthracite	SRL-2-L-81	2CKA006220A0155		SRL-2-R-81	2CKA006220A0167	
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		antique brass	SRL-2-L-840	2CKA006220A0377		SRL-2-R-840	2CKA006220A0381	



SRS-2-L-84



SRS-2-R-84

			Rocker 2 gang left, with “Scene” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).			Rocker 2 gang right, with “Scene” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
Pack unit pc.	Weight 1 pc. kg	Description	Order details			Order details		
			Type	Order code	Price 1 pc. €	Type	Order code	Price 1 pc. €
		Reflex SI						
		white	SRS-2-L-212	2CKA006220A0198		SRS-2-R-212	2CKA006220A0206	
		alpine white	SRS-2-L-214	2CKA006220A0199		SRS-2-R-214	2CKA006220A0207	
		future® linear						
		anthracite	SRS-2-L-81	2CKA006220A0161		SRS-2-R-81	2CKA006220A0173	
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		aluminium silver	SRS-2-L-83	2CKA006220A0162		SRS-2-R-83	2CKA006220A0174	
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		studio white matt	SRS-2-L-884	2CKA006220A0609		SRS-2-R-884	2CKA006220A0613	
		black, matt	SRS-2-L-885	2CKA006220A0626		SRS-2-R-885	2CKA006220A0630	
		solo®						
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		grey metallic	SRS-2-L-803	2CKA006220A0558		SRS-2-R-803	2CKA006220A0562	
		Busch-axcent®						
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		pure stainless steel						
		stainless steel	SRS-2-L-866	2CKA006220A0541		SRS-2-R-866	2CKA006220A0545	
		carat®						
		anthracite	SRS-2-L-81	2CKA006220A0161		SRS-2-R-81	2CKA006220A0173	
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		Dynasty®						
		anthracite	SRS-2-L-81	2CKA006220A0161		SRS-2-R-81	2CKA006220A0173	
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		antique brass	SRS-2-L-840	2CKA006220A0379		SRS-2-R-840	2CKA006220A0382	

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit



SRD-2-L-84



SRD-2-R-84

			Rocker 2 gang left, with “Dimmer” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).			Rocker 2 gang right, with “Dimmer” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
Pack unit pc.	Weight 1 pc. kg	Description	Order details			Order details		
			Type	Order code	Price 1 pc. €	Type	Order code	Price 1 pc. €
		Reflex SI						
		white	SRD-2-L-212	2CKA006220A0200		SRD-2-R-212	2CKA006220A0261	
		alpine white	SRD-2-L-214	2CKA006220A0201		SRD-2-R-214	2CKA006220A0262	
		future® linear						
		anthracite	SRD-2-L-81	2CKA006220A0164		SRD-2-R-81	2CKA006220A0258	
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		aluminium silver	SRD-2-L-83	2CKA006220A0165		SRD-2-R-83	2CKA006220A0259	
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		studio white matt	SRD-2-L-884	2CKA006220A0610		SRD-2-R-884	2CKA006220A0611	
		black, matt	SRD-2-L-885	2CKA006220A0627		SRD-2-R-885	2CKA006220A0628	
		solo®						
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		grey metallic	SRD-2-L-803	2CKA006220A0559		SRD-2-R-803	2CKA006220A0560	
		Busch-axcent®						
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		pure stainless steel						
		stainless steel	SRD-2-L-866	2CKA006220A0542		SRD-2-R-866	2CKA006220A0543	
		carat®						
		anthracite	SRD-2-L-81	2CKA006220A0164		SRD-2-R-81	2CKA006220A0258	
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		Dynasty®						
		anthracite	SRD-2-L-81	2CKA006220A0164		SRD-2-R-81	2CKA006220A0258	
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		antique brass	SRD-2-L-840	2CKA006220A0380		SRD-2-R-840	2CKA006220A0383	

ABB i-bus® KNX

User Operation – Design Ranges



6108/60-500

Control Element, 6 gang with Universal Input, 5 gang

Control element with a maximum of 6 control functions and an RTC extension unit (slave). Primary function for calling up the main function. Status bar for indication/display of operating or RTC functions. Operation is carried out via cover plate 6108/61-xxx. With actual value temperature display. With display of set-value temperature. With universal input with: - max. of 5 binary inputs - 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V - 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/60-500	2CKA006115A0454			1




6108/61-212-500

Cover Plate for KNX Control Element, 7 gang

As cover for control element, 7 gang (6108/60).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	6108/61-212-500	2CKA006115A0474		0.012	1
alpine white	–	6108/61-214-500	2CKA006115A0475		0.012	1
platinum ¹⁾	–	6108/61-20-500	2CKA006115A0476		0.016	1
bronze ¹⁾	–	6108/61-21-500	2CKA006115A0477		0.016	1
ivory/white	–	6108/61-22G-500	2CKA006115A0478		0.016	1
studio white	–	6108/61-24G-500	2CKA006115A0480		0.016	1
palladium	–	6108/61-260-500	2CKA006115A0481		0.016	1
titanium ¹⁾	–	6108/61-266-500	2CKA006115A0482		0.016	1
anthracite	–	6108/61-81-500	2CKA006115A0483		0.018	1
ivory white	–	6108/61-82-500	2CKA006115A0484		0.018	1
aluminium silver	–	6108/61-83-500	2CKA006115A0485		0.018	1
studio white	–	6108/61-84-500	2CKA006115A0486		0.018	1
studio white matt	–	6108/61-884-500	2CKA006115A0487		0.018	1
black matt	–	6108/61-885-500	2CKA006115A0488		0.018	1
stainless steel	–	6108/61-866-500	2CKA006115A0492		0.018	1

¹⁾ To be discontinued



6108/61-914

Cover Plate, Control Element, 7 gang

As cover for control element, 7 gang (6108/60).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	6108/61-914	2CKA006155A0115			1
stainless steel	–	6108/61-840-500	2CKA006155A0121		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges



6109/05-500

Room Temperature Controller with 5 gang Universal Input, FM

Room temperature controller without “local control” and without internal temperature sensor. With universal input with: - max. of 5 binary inputs - 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V - 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/05-500	2CKA006181A0013		0.08	1



6109/08-500

Room Temperature Controller, Commercial, with 5 gang Universal Input, FM

Room thermostat without “local control” incl. insert for centre plate for cooling element. With universal input with: - max. of 5 binary inputs - 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V - 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226. Can only be used with a cover plate 2114-xxx or 6541-xxx, with the exception of 6541-20, -21, -260 and -266. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/08-500	2CKA006134A0313		0.138	1



6541-84

Cover Plate for Room Temperature Controller, Commercial

For room temperature controller, commercial.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	6541-81	2CKA006599A2882		0.022	10
savanna/ivory	–	6541-82	2CKA006599A2832		0.022	10
aluminium silver ¹⁾	–	6541-83	2CKA006599A2885		0.022	10
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
studio white, matt ¹⁾	–	6541-884	2CKA006599A2962		0.022	10
black matt ¹⁾	–	6541-885	2CKA006599A2967		0.022	10
solo®						
savanna/ivory	–	6541-82	2CKA006599A2832		0.022	10
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
carat®						
anthracite	–	6541-81	2CKA006599A2882		0.022	10
savanna/ivory	–	6541-82	2CKA006599A2832		0.022	10
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
pure stainless steel ¹⁾						
stainless steel	–	6541-866	2CKA006599A2924		0.018	10
Busch-axcent®						
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
alpha						
studio white, high gloss ²⁾	–	6541-24G	2CKA006599A2332		0.02	10
Platinum ²⁾	–	6541-20	2CKA006599A1466		0.02	10
Bronze ²⁾	–	6541-21	2CKA006599A1524		0.02	10
titanium ²⁾	–	6541-266	2CKA006599A2856		0.02	10
impuls						
alpine white ²⁾	–	6541-74	2CKA006599A2076		0.019	
studio white matt ²⁾	–	6541-774	2CKA006599A2971		0.019	
black matt ²⁾	–	6541-775	2CKA006599A2975		0.019	
aluminium silver ²⁾	–	6541-783	2CKA006599A2919		0.019	
Busch-Duro 2000® SI						
white (SI-Series)	–	2114-212	2CKA006599A1193		0.016	10

¹⁾ Surface painted

²⁾ To be discontinued



ABB i-bus® KNX

User Operation – Design Ranges



2114-214

Cover Plate for Temperature Controller, Commercial
For room temperature controller, commercial.

Description	Mod. width	Order details		Price	Weight	Pack
		Type code	Order code	1 piece	1 piece	unit
Reflex SI				€	kg	pc.
alpine white (SI-Series)	–	2114-214-500	2CKA006599A3008		0.02	10

ABB i-bus® KNX

User Operation – Design Ranges – Room Temperature Controller



6108/18-500

Room thermostat, heating/cooling operation

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. For controlling commercially available valve drives. With display of set-value temperature. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/18-500	2CKA006134A0319		0.08	1



CP-FCC-212

Cover plate for fan coil controller

As cover for ABB-free@home® room temperature controller RTC-F-1. As cover for KNX room temperature controller (6108/18-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	CP-FCC-212	2CKA006220A0245		0.012	1
alpine white	–	CP-FCC-214	2CKA006220A0246		0.012	1
future® linear						
anthracite	–	CP-FCC-81	2CKA006220A0242		0.016	1
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1
aluminium silver	–	CP-FCC-83	2CKA006220A0243		0.016	1
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
studio white matt	–	CP-FCC-884	2CKA006220A0617		0.016	1
black, matt	–	CP-FCC-885	2CKA006220A0634		0.016	1
solo®						
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
grey metallic	–	CP-FCC-803	2CKA006220A0566		0.016	1
Busch-axcent®						
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
pure stainless steel						
stainless steel	–	CP-FCC-866	2CKA006220A0549		0.016	1
carat®						
anthracite	–	CP-FCC-81	2CKA006220A0242		0.016	1
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
Dynasty®						
anthracite	–	CP-FCC-81	2CKA006220A0242		0.016	1
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1

ABB i-bus® KNX

User Operation – Design Ranges – Room Temperature Controller



6109/18-500

Room Temperature Controller with 5 gang universal input, FM

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. With display of set-value temperature, master/slave configuration and base load operation. With universal inputs: a) max. of 5 binary inputs b) 4 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V or c) 2 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V and an external temperature sensor PT1000/T6226.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/18-500	2CKA006134A0315		0.144	1



6109/28-500

Room Temperature Controller with CO₂/moisture sensor, FM

Control element with room thermostat function and CO₂ moisture/air pressure sensor or triggering the heating, ventilation and fan-coil actuators. With display of set-value temperature, master/slave configuration and base load operation. With universal inputs: a) max. of 5 binary inputs b) 4 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V or c) 2 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V and an external temperature sensor PT1000/T6226.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/28-500	2CKA006134A0317		0.122	1



6109/03-214-500

**Cover plate for Room Temperature Controller or
Room Temperature Controller with CO₂/moisture future® linear**

As cover for room temperature controller with/without CO₂/moisture sensor (6109/18 and 6109/28).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	6109/03-212-500	2CKA006155A0051		0.018	1
alpine white	–	6109/03-214-500	2CKA006155A0052		0.018	1
future® linear						
anthracite	–	6109/03-81-500	2CKA006155A0060		0.018	1
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
aluminium silver	–	6109/03-83-500	2CKA006155A0062		0.018	1
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
studio white matt	–	6109/03-884-500	2CKA006155A0064		0.018	1
black, matt	–	6109/03-885-500	2CKA006155A0065		0.018	1
solo®						
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
Busch-axcent®						
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
pure stainless steel						
stainless steel	–	6109/03-866-500	2CKA006155A0069		0.018	1
carat®						
anthracite	–	6109/03-81-500	2CKA006155A0060		0.018	1
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
Dynasty®						
anthracite	–	6109/03-81-500	2CKA006155A0060		0.018	1
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
antique brass	–	6109/03-840-500	2CKA006155A0114		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges – Millenium


The Millenium collection is the first metal range to incorage the KNX system, the most intelligent way of managing spaces and optimizing

performance in terms of energy savings. Millenium is based on a combinable concept which creates a very comprehensive range, suitable for


any types of needs. This makes it the ideal collection for all types of homes, hotels, offices and shops.




01



02



03



01 Switch Sensor 2 gang KNX

02 Switch Sensor 4 gang KNX

03 Switch Sensor 6 gang KNX

04 Switch Sensor 6 gang KNX
with IR

05 Busch watchdog 180° KNX

06 Room Thermostat KNX

Function

Switching | Dimming | Blinds |
Sending values | Scenes etc.

Features

Incl. 10 logic channels (light
scene actuator | sequence
actuator | logic gates, etc.)
Control element: Switch
contacts
Display elements: LED to
indicate the function

Function

Switching | Dimming | Blinds |
Sending values | Scenes etc.

Features

Incl. 10 logic channels (light
scene actuator | sequence
actuator | logic gates, etc.)
Control element: Switch
contacts
Display elements: LED to
indicate the function

Function

Switching | Dimming | Blinds |
Sending values | Scenes etc.

Features

Incl. 10 logic channels (light
scene actuator | sequence
actuator | logic gates, etc.)
Control element: Switch
contacts
Display elements: LED to
indicate the function

Wide range. Millenium range offers special mounting plates for KNX sensors to reduce the height and improve the aesthetics for ultra slim design. The KNX sensors allow to replace the buttons with desired symbols in order to adjust the sensors to

specific design and needs like light, blind, scene, RTC or fan coil. Millennium offers a wide and elegant choice of finishes in stainless steel material: from the Brush Stainless Steel, to the soft touch given by the Silk Black, and the luxury of the

sophisticated gold finishes, Matt Gold and Antique Gold. Moreover, the range is now extended with two glass colors: White and Black glass to cater the luxury segment.



04



Function

Switching | Dimming | Blinds | Sending values | Scenes etc. | 6 gang sensor with IR.

Features

Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

05



Function

Movement sensor with up to four channels.
Detection range: frontal: 6 m, lateral: 6 m
Detection angle: 180°
Brightness limit value: 5 Lux - 150 Lux
Mounting height: 1.1 m

06



Function

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2- and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode.

The Millennium range is only available in the following countries: China, Dubai, India, Kuwait, Oman, Qatar, Saudi Arabia, Singapore, UAE and UK.
Frames and special mounting plates for KNX sensors have to be ordered by:
ABB, S.A.
Low Voltage Products-Niessen,
Oiertzün / Spain
www.abb.es/niessen

Features

Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)

Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment.
Display elements: LCD showing operation modes.
Protection class (Device): IP 20
Temperature range (Device): -5 °C to +45 °C

ABB i-bus® KNX

User Operation – Design Ranges – Millenium



6125/20-981-500

Switch Sensor 2 gang KNX

Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6125/20-981-500	2CKA006115A0443		0.083	1



6126/20-981-500

Switch Sensor 4 gang KNX

Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6126/20-981-500	2CKA006116A0218		0.084	1



6129/20-981-500

Switch Sensor 6 gang KNX

Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6129/20-981-500	2CKA006118A0104		0.085	1



6129/21-981-500

Switch Sensor 6 gang KNX with IR

Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6129/21-981-500	2CKA006118A0107		0.086	1



6124/08-981-500

Room Thermostat

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2- and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).

Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment.

Display elements: LCD showing operation modes. Protection class (Device): IP 20.

Temperature range (Device): -5 °C to +45 °C. Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	-	6124/08-981-500	2CKA006134A0309		0.101	1




Buttons with symbols

Buttons with symbols for Millenium control covers 1/2 gang, 2/4 gang, 3/6 gang and 3/6 gang with infrared.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Symbol for marking "Light"	-	6123/20-500	2CKA006123A0001		0.011	1
Symbol for marking "blinds"	-	6123/21-500	2CKA006123A0002		0.011	1
Symbol for marking "scene"	-	6123/22-500	2CKA006123A0003		0.011	1
Symbol for marking "temperature"	-	6123/23-500	2CKA006123A0004		0.011	1
Symbol for marking "ceiling light"	-	6123/24-500	2CKA006123A0005		0.003	1
Symbol for marking "Fan Coil"	-	6123/26-500	2CKA006123A0006		0.003	1

ABB i-bus® KNX


User Operation – Design Ranges – Millenium

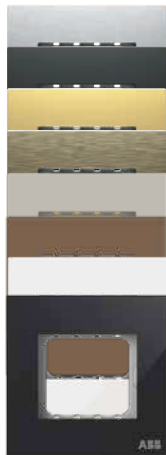

Triple rocker / KNX frame 1 gang

Frame includes metal mounting plate. Dimensions: 86 mm x 86 mm.


Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
stainless steel	–	AMD5153-ST	2CLA637100N1101		0.109	10
silk black	–	AMD5153-SB	2CLA637100N1501		0.111	10
antique gold	–	AMD5153-AG	2CLA637100N1601		0.111	10
matt gold	–	AMD5153-MG	2CLA637100N1701		0.111	10
dune sand	–	AMD5153-DU	2CLA637100N6201		0.111	10
mocha brown	–	AMD5153-MO	2CLA637100N6601		0.111	10
white glass	–	AMD5153-WG	2CLA637100N3001		0.205	10
black glass	–	AMD5153-BG	2CLA637100N3101		0.205	10



Triple rocker / KNX frame 2 gang

Frame includes metal mounting plate. Dimensions: 86 mm x 147 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
stainless steel	–	AMD5253-ST	2CLA667200N1101		0.177	10
silk black	–	AMD5253-SB	2CLA667200N1501		0.177	10
antique gold	–	AMD5253-AG	2CLA667200N1601		0.176	10
matt gold	–	AMD5253-MG	2CLA667200N1701		0.178	10
dune sand	–	AMD5253-DU	2CLA667200N6201		0.177	10
mocha brown	–	AMD5253-MO	2CLA667200N6601		0.177	10
white glass	–	AMD5253-WG	2CLA667200N3001		0.315	5
black glass	–	AMD5253-BG	2CLA667200N3101		0.315	5



AMD5053

Special metal mounting plate for KNX sensors

Allows reduction height of KNX sensors to 1 mm. Only for following items: AMD72053-AN, AMD74053-AN, AMD76053-AN, AMD76153-AN.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Special metal mounting plate for KNX sensors 1 gang	–	AMD5053	2CLA627190N1001		0.032	1

Notes

ABB i-bus® KNX

User Operation – Design Ranges – Zenit



01



02



03



01 Switch Sensor 2 gang KNX

02 Switch Sensor 4 gang KNX

03 Switch Sensor 6 gang KNX

04 Switch Sensor 6 gang KNX
with IR

05 Busch watchdog 180° KNX

06 Room Thermostat KNX

Function

Switching | Dimming | Blinds |
Sending values | Scenes etc.

Features

Incl. 10 logic channels (light
scene actuator | sequence
actuator | logic gates, etc.)
Control element: Switch
contacts
Display elements: LED to
indicate the function

Function

Switching | Dimming | Blinds |
Sending values | Scenes etc.

Features

Incl. 10 logic channels (light
scene actuator | sequence
actuator | logic gates, etc.)
Control element: Switch
contacts
Display elements: LED to
indicate the function

Function

Switching | Dimming | Blinds |
Sending values | Scenes etc.

Features

Incl. 10 logic channels (light
scene actuator | sequence
actuator | logic gates, etc.)
Control element: Switch
contacts
Display elements: LED to
indicate the function

Zenit is based on a combinable concept which creates a very comprehensive range, suitable for any type of needs. Optimizing comfort, safety and efficiency of homes and buildings: Providing with complete com-

fort solutions to satisfy all type of needs and projects. Ensuring safety and protection of persons and goods. Saving energy by using only the amount of energy required.

Zenit offers two different mounting plates for KNX sensors corresponding to different market standards: VDE and NEMA.



04



Function

Switching | Dimming | Blinds | Sending values | Scenes etc. | 6 gang sensor with IR.

Features

Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

05



Function

Movement sensor with up to four channels.
Detection range: frontal: 6 m, lateral: 6 m
Detection angle: 180°
Brightness limit value: 5 Lux - 150 Lux
Mounting height: 1.1 m

06



Function

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2- and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode.

The Zenit VDE range is only available in the following countries:
Spain, Portugal, Russia, France
The Zenit NEMA range is only available in the following countries:
Latin America, Australia, Thailand, Vietnam.
Sensors, frames and special mounting plates for KNX sensors have to be ordered by:
ABB, S.A.
Low Voltage Products-Niessen,
Ojartzun / Spain
www.abb.es/niessen

Features

Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment.
Display elements: LCD showing operation modes.
Protection class (Device): IP 20
Temperature range (Device): -5 °C to +45 °C

ABB i-bus® KNX

User Operation – Design Ranges – Zenit




6125/98-509

1/2-fold sensor

Push switch function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6125/98-509	2CKA006115A0444		0.077	1



N2221.2

Cover Zenit 1/2-fold

Cover Zenit 1/2-fold. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2221.2 BL	2CLA222120N1101		0.038	1
anthracite	–	N2221.2 AN	2CLA222120N1801		0.038	1
silver	–	N2221.2 PL	2CLA222120N1301		0.038	1




6126/98-509

2/4-fold sensor

Push switch function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6126/98-509	2CKA006116A0219		0.079	1



N2221.4

Cover Zenit 2/4-fold

Cover Zenit 2/4-fold. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2221.4 BL	2CLA222140N1101		0.038	1
anthracite	–	N2221.4 AN	2CLA222140N1801		0.038	1
silver	–	N2221.4 PL	2CLA222140N1301		0.038	1




6129/96-509

3/6-fold sensor

Push switch function: switching / dimming / blind / sending values / scenes etc.
 Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.)
 Control element: Switch contacts. Display elements: LED to indicate the function.
 Protection class (Device): IP 20. Temperature range (Device): -5 °C to +45 °C.
 Dimensions (L x W x D): 44 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	-	6129/96-509	2CKA006118A0105		0.08	1



N2221.6

Cover Zenit 3/6-fold

Cover Zenit 3/6-fold. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	-	N2221.6 BL	2CLA222160N1101		0.011	1
anthracite	-	N2221.6 AN	2CLA222160N1801		0.011	1
silver	-	N2221.6 PL	2CLA222160N1301		0.011	1




6129/98-509

3/6-fold sensor with IR

Push switch function: switching / dimming / blind / sending values / scenes etc.
 Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
 With infrared. Control element: Switch contacts. Display elements: LED to indicate the function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	-	6129/98-509	2CKA006118A0108		0.088	1



N2221.7

Cover Zenit 3/6-fold with IR

Cover Zenit 3/6-fold with IR. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	-	N2221.7 BL	2CLA222170N1101		0.011	1
anthracite	-	N2221.7 AN	2CLA222170N1801		0.011	1
silver	-	N2221.7 PL	2CLA222170N1301		0.011	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit



6124/88-509

Room thermostat heating / cooling Fan Coil

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2- and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment. Display elements: LCD showing operation modes.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6124/88-509	2CKA006134A0310		0.096	1



N2240.4

Cover Zenit room thermostat

Cover Zenit room thermostat. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2240.4 BL	2CLA224040N1101		0.028	1
anthracite	–	N2240.4 AN	2CLA224040N1801		0.028	1
silver	–	N2240.4 PL	2CLA224040N1301		0.028	1



N2241.4

Cover Zenit watchdog

Cover Zenit watchdog. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2241.4 BL	2CLA224140N1101		0.011	1
anthracite	–	N2241.4 AN	2CLA224140N1801		0.011	1
silver	–	N2241.4 PL	2CLA224140N1301		0.01	1



Buttons with symbols

Buttons with symbols for Zenit control covers 1/2 gang, 2/4 gang, 3/6 gang and 3/6 gang with infrared.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Symbol for marking "Light"	–	6123/20-500	2CKA006123A0001		0.011	10
Symbol for marking "blinds"	–	6123/21-500	2CKA006123A0002		0.011	10
Symbol for marking "scene"	–	6123/22-500	2CKA006123A0003		0.011	10
Symbol for marking "temperature"	–	6123/23-500	2CKA006123A0004		0.011	10
Symbol for marking "ceiling light"	–	6123/24-500	2CKA006123A0005		0.003	10
Symbol for marking "Fan Coil"	–	6123/26-500	2CKA006123A0006		0.003	10



N2271 XX

Frames, 1 window, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2271 BL	2CLA227100N1102		0.032	1
anthracite	–	N2271 AN	2CLA227100N1802		0.03	1
champagne	–	N2271 CV	2CLA227100N1902		0.031	1
wengué	–	N2271 WG	2CLA227100N2102		0.043	1
slate	–	N2271 PZ	2CLA227100N2202		0.92	1
white glass	–	N2271 CB	2CLA227100N3002		0.083	1
black glass	–	N2271 CN	2CLA227100N3102		0.083	1
pearl glass	–	N2271 CP	2CLA227100N3502		0.085	1
coffee glass	–	N2271 CC	2CLA227100N3702		0.083	1
graphite glass	–	N2271 CF	2CLA227100N3802		0.085	1
champagne glass	–	N2271 CH	2CLA227100N3902		0.085	1
stainless steel	–	N2271 OX	2CLA227100N4002		0.2	1

Basic frame, 1 window, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2271.1 BL	2CLA227110N1102		0.021	1
silver	–	N2271.1 PL	2CLA227110N1302		0.021	1
anthracite	–	N2271.1 AN	2CLA227110N1802		0.019	1
champagne	–	N2271.1 CV	2CLA227110N1902		0.02	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit



N2272 BL

2 gang frames, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2272 BL	2CLA227200N1102		0.054	1
silver	–	N2272 PL	2CLA227200N1302		0.051	1
anthracite	–	N2272 AN	2CLA227200N1802		0.053	1
champagne	–	N2272 CV	2CLA227200N1902		0.052	1
wengué	–	N2272 WG	2CLA227200N2102		0.065	1
slate	–	N2272 PZ	2CLA227200N2202		0.154	1
white glass	–	N2272 CB	2CLA227200N3002		0.143	1
black glass	–	N2272 CN	2CLA227200N3102		0.136	1
pearl glass	–	N2272 CP	2CLA227200N3502		0.141	1
coffee glass	–	N2272 CC	2CLA227200N3702		0.142	1
graphite glass	–	N2272 CF	2CLA227200N3802		0.141	1
champagne glass	–	N2272 CH	2CLA227200N3902		0.14	1
stainless steel	–	N2272 OX	2CLA227200N4002		0.35	1



N2272.1 BL

2 gang frames – Basic, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2272.1 BL	2CLA227210N1102		0.036	1
silver	–	N2272.1 PL	2CLA227210N1302		0.035	1
anthracite	–	N2272.1 AN	2CLA227210N1802		0.034	1
champagne	–	N2272.1 CV	2CLA227210N1902		0.035	1



N2273 BL

3 gang frames, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2273 BL	2CLA227300N1102		0.08	1
silver	–	N2273 PL	2CLA227300N1302		0.079	1
anthracite	–	N2273 AN	2CLA227300N1802		0.079	1
champagne	–	N2273 CV	2CLA227300N1902		0.079	1
wengué	–	N2273 WG	2CLA227300N2102		0.099	1
slate	–	N2273 PZ	2CLA227300N2202		0.218	1
white glass	–	N2273 CB	2CLA227300N3002		0.2	1
black glass	–	N2273 CN	2CLA227300N3102		0.2	1
pearl glass	–	N2273 CP	2CLA227300N3502		0.2	1
coffee glass	–	N2273 CC	2CLA227300N3702		0.2	1
graphite glass	–	N2273 CF	2CLA227300N3802		0.2	1
champagne glass	–	N2273 CH	2CLA227300N3902		0.2	1
stainless steel	–	N2273 OX	2CLA227300N4002		0.52	1



N2273.1 BL

3 gang frames – Basic, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2273.1 BL	2CLA227310N1102		0.054	1
silver	–	N2273.1 PL	2CLA227310N1302		0.053	1
anthracite	–	N2273.1 AN	2CLA227310N1802		0.052	1
champagne	–	N2273.1 CV	2CLA227310N1902		0.055	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit



N2274 BL

4 gang frames, Zenit VDE


Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2274 BL	2CLA227400N1102		0.102	1
silver	–	N2274 PL	2CLA227400N1302		0.102	1
anthracite	–	N2274 AN	2CLA227400N1802		0.103	1
champagne	–	N2274 CV	2CLA227400N1902		0.103	1
wengué	–	N2274 WG	2CLA227400N2102		0.123	1
slate	–	N2274 PZ	2CLA227400N2202		0.278	1
white glass	–	N2274 CB	2CLA227400N3002		0.26	1
black glass	–	N2274 CN	2CLA227400N3102		0.261	1
pearl glass	–	N2274 CP	2CLA227400N3502		0.261	1
coffee glass	–	N2274 CC	2CLA227400N3702		0.261	1
graphite glass	–	N2274 CF	2CLA227400N3802		0.261	1
champagne glass	–	N2274 CH	2CLA227400N3902		0.261	1
stainless steel	–	N2274 OX	2CLA227400N4002		0.647	1



N2274.1 BL

4 gang frames – Basic, Zenit VDE


Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2274.1 BL	2CLA227410N1102		0.07	1
silver	–	N2274.1 PL	2CLA227410N1302		0.07	1
anthracite	–	N2274.1 AN	2CLA227410N1802		0.069	1
champagne	–	N2274.1 CV	2CLA227410N1902		0.069	1



N2372.1 XX

Frame, 2 modules, Zenit, NEMA

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2372.1 BL	2CLA237210N1102		0.067	1
silver	–	N2372.1 PL	2CLA237210N1302		0.047	1
anthracite	–	N2372.1 AN	2CLA237210N1802		0.047	1
champagne	–	N2372.1 CV	2CLA237210N1902		0.047	1
slate	–	N2372.1 PZ	2CLA237200N2202		0.047	1
white glass	–	N2372.1 CB	2CLA237200N3002		0.124	1
black glass	–	N2372.1 CN	2CLA237200N3102		0.14	1
stainless steel	–	N2372.1 OX	2CLA237200N4002		0.278	1



N2371.9V

Metal mounting plate

Mounting plate for 3 module box, facilitates the assembly of 1 and 2 module devices in vertical or horizontal installations.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
for vertical installation	–	N2371.9V	2CLA237190N1002		0.054	20

ABB i-bus® KNX


User Operation – Design Ranges – Zenit



AMD22710 BL

1 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD22710 BL	2CLA227100B1101			1
silver	–	AMD22710 PL	2CLA227100B1301			1
antrachite	–	AMD22710 AN	2CLA227100B1801			1
champagne	–	AMD22710 CV	2CLA227100B1901			1



AMD24720 BL

2 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD24720 BL	2CLA247200B1101			1
silver	–	AMD24720 PL	2CLA247200B1301			1
antrachite	–	AMD24720 AN	2CLA247200B1801			1
champagne	–	AMD24720 CV	2CLA247200B1901			1



AMD26731 BL

3 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD26731 BL	2CLA267310B1101			1
silver	–	AMD26731 PL	2CLA267310B1301			1
antrachite	–	AMD26731 AN	2CLA267310B1801			1
champagne	–	AMD26731 CV	2CLA267310B1901			1



AMD28741 BL

4 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD28741 BL	2CLA287410B1101			1
silver	–	AMD28741 PL	2CLA287410B1301			1
antrachite	–	AMD28741 AN	2CLA287410B1801			1
champagne	–	AMD28741 CV	2CLA287410B1901			1



RS/U 1.1

KNX sensor, 1/2 gang, 1M

Push switch function: switching, dimming, blind or scene.

Display elements: LED to indicate the function.

To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RS/U 1.1	2CSY244490R1012		0.11	1



RS/U 2.1

KNX sensor, 2/4 gang, 2M

Push switch function: switching, dimming, blind or scene.

Display elements: LED to indicate the function.

To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RS/U 2.1	2CSY247450R1003		0.12	1



RA/U 1.16.1

KNX sensor/switch actuator, 2/1 gang, 2M

Push switch function: switching, dimming, blind or scene.

Display elements: LED to indicate the function.

Outputs: 1x potential free contact.

Rated current: 16 A.

To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RA/U 1.16.1	2CSY249580R1103		0.12	1



RA/U 2.8.1

KNX sensor/switch actuator, 2/2 gang, 2M

Push switch function: switching, dimming, blind or scene.

Display elements: LED to indicate the function.

Outputs: 2x potential free contacts.

Rated current: 8 A.

To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RA/U 2.8.1	2CSY242150R1106		0.12	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit



RB/U 1.1

KNX sensor/blind actuator, 1/1 gang, 2M

Push switch function: switching, dimming, blind or scene.

Display elements: LED to indicate the function.

Outputs: 1x change-over contacts/potential-bound

Rated current: 8 A.

To be installed with N2221, N2221.1, N2221.3, N2221.5, N2221.8, N2221.9 or N22 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RB/U 1.1	2CSY247240R1105		0.12	1



N2121 BL

Rocker cover without symbol, 1M

Rocker cover without symbol for KNX sensor/actuator.

Suitable for codes: RS/U 1.1 and left and right positions of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121 BL	2CLA212100N1101			10
full white	–	N2121 BB	2CLA212100N1201			10
silver - chrome	–	N2121 PL	2CLA212100N1301			10
full anthracite	–	N2121 AA	2CLA212100N1601			10
anthracite - chrome	–	N2121 AN	2CLA212100N1801			10
champagne - chrome	–	N2121 CV	2CLA212100N1901			10



N2221 BL

Rocker cover without symbol, 2M

Rocker cover without symbol for KNX sensor/actuator.

Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221 BL	2CLA222100N1101			10
full white	–	N2221 BB	2CLA222100N1201			10
silver - chrome	–	N2221 PL	2CLA222100N1301			10
full anthracite	–	N2221 AA	2CLA222100N1601			10
anthracite - chrome	–	N2221 AN	2CLA222100N1801			10
champagne - chrome	–	N2221 CV	2CLA222100N1901			10



N2121.1 BL

Rocker cover with lamp symbol, 1M

Rocker cover without symbol for KNX sensor/actuator.

Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.1 BL	2CLA212110N1101			10
full white	–	N2121.1 BB	2CLA212110N1201			10
silver - chrome	–	N2121.1 PL	2CLA212110N1301			10
full anthracite	–	N2121.1 AA	2CLA212110N1601			10
anthracite - chrome	–	N2121.1 AN	2CLA212110N1801			10
champagne - chrome	–	N2121.1 CV	2CLA212110N1901			10



N2121.1R BL

Rocker cover with lamp symbol, Right, 1M

Rocker cover with lamp symbol for KNX sensor/actuator.

Suitable for codes: right position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.1R BL	2CLA212112N1101			10
full white	–	N2121.1R BB	2CLA212112N1201			10
silver - chrome	–	N2121.1R PL	2CLA212112N1301			10
full anthracite	–	N2121.1R AA	2CLA212112N1601			10
anthracite - chrome	–	N2121.1R AN	2CLA212112N1801			10
champagne - chrome	–	N2121.1R CV	2CLA212112N1901			10



N2221.1 BL

Rocker cover with lamp symbol, 2M

Rocker cover with lamp symbol for KNX sensor/actuator.

Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.1 BL	2CLA222110N1101			10
full white	–	N2221.1 BB	2CLA222110N1201			10
silver - chrome	–	N2221.1 PL	2CLA222110N1301			10
full anthracite	–	N2221.1 AA	2CLA222110N1601			10
anthracite - chrome	–	N2221.1 AN	2CLA222110N1801			10
champagne - chrome	–	N2221.1 CV	2CLA222110N1901			10

ABB i-bus® KNX

User Operation – Design Ranges – Zenit




N2121.3 BL

Rocker cover with blind symbol, 1M

Rocker cover with blind symbol for KNX sensor/actuator.

Suitable for codes: RS/U 1.1 and left and right positions of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.3 BL	2CLA212130N1101			10
full white	–	N2121.3 BB	2CLA212130N1201			10
silver - chrome	–	N2121.3 PL	2CLA212130N1301			10
full anthracite	–	N2121.3 AA	2CLA212130N1601			10
anthracite - chrome	–	N2121.3 AN	2CLA212130N1801			10
champagne - chrome	–	N2121.3 CV	2CLA212130N1901			10



N2221.3 BL

Rocker cover with blind symbol, 2M

Rocker cover with blind symbol for KNX sensor/actuator.

Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.3 BL	2CLA222130N1101			10
full white	–	N2221.3 BB	2CLA222130N1201			10
silver - chrome	–	N2221.3 PL	2CLA222130N1301			10
full anthracite	–	N2221.3 AA	2CLA222130N1601			10
anthracite - chrome	–	N2221.3 AN	2CLA222130N1801			10
champagne - chrome	–	N2221.3 CV	2CLA222130N1901			10



N2121.5 BL

Rocker cover with ON/OFF symbol, 1M

Rocker cover with ON/OFF symbol for KNX sensor/actuator.

Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.5 BL	2CLA212150N1101			10
full white	–	N2121.5 BB	2CLA212150N1201			10
silver - chrome	–	N2121.5 PL	2CLA212150N1301			10
full anthracite	–	N2121.5 AA	2CLA212150N1601			10
anthracite - chrome	–	N2121.5 AN	2CLA212150N1801			10
champagne - chrome	–	N2121.5 CV	2CLA212150N1901			10



N2121.5R BL

Rocker cover with ON/OFF symbol, Right, 1M

Rocker cover with ON/OFF symbol for KNX sensor/actuator.

Suitable for codes: right position of RS/U 2.1, RA/U1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.5R BL	2CLA212152N1101			10
full white	–	N2121.5R BB	2CLA212152N1201			10
silver - chrome	–	N2121.5R PL	2CLA212152N1301			10
full anthracite	–	N2121.5R AA	2CLA212152N1601			10
anthracite - chrome	–	N2121.5R AN	2CLA212152N1801			10
champagne - chrome	–	N2121.5R CV	2CLA212152N1901			10



N2221.5 BL

Rocker cover with ON/OFF symbol, 2M

Rocker cover with ON/OFF symbol for KNX sensor/actuator.

Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.5 BL	2CLA222150N1101			10
full white	–	N2221.5 BB	2CLA222150N1201			10
silver - chrome	–	N2221.5 PL	2CLA222150N1301			10
full anthracite	–	N2221.5 AA	2CLA222150N1601			10
anthracite - chrome	–	N2221.5 AN	2CLA222150N1801			10
champagne - chrome	–	N2221.5 CV	2CLA222150N1901			10



N2121.8 BL

Rocker cover with dimmer symbol, 1M

Rocker cover with dimmer symbol for KNX sensor/actuator.

Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.8 BL	2CLA212180N1101			10
full white	–	N2121.8 BB	2CLA212180N1201			10
silver - chrome	–	N2121.8 PL	2CLA212180N1301			10
full anthracite	–	N2121.8 AA	2CLA212180N1601			10
anthracite - chrome	–	N2121.8 AN	2CLA212180N1801			10
champagne - chrome	–	N2121.8 CV	2CLA212180N1901			10

ABB i-bus® KNX

User Operation – Design Ranges – Zenit



N2121.8R BL

Rocker cover with dimmer symbol, Right, 1M

Rocker cover with dimmer symbol for KNX sensor/actuator.

Suitable for codes: right position of RS/U 2.1, RA/U1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.8R BL	2CLA212182N1101			10
full white	–	N2121.8R BB	2CLA212182N1201			10
silver - chrome	–	N2121.8R PL	2CLA212182N1301			10
full anthracite	–	N2121.8R AA	2CLA212182N1601			10
anthracite - chrome	–	N2121.8R AN	2CLA222180N1801			10
champagne - chrome	–	N2121.8R CV	2CLA222180N1901			10



N2221.8 BL

Rocker cover with dimmer symbol, 2M

Rocker cover with dimmer symbol for KNX sensor/actuator.

Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.8 BL	2CLA222180N1101			10
full white	–	N2221.8 BB	2CLA222180N1201			10
silver - chrome	–	N2221.8 PL	2CLA222180N1301			10
full anthracite	–	N2221.8 AA	2CLA222180N1601			10
anthracite - chrome	–	N2221.8 AN	2CLA222180N1801			10
champagne - chrome	–	N2221.8 CV	2CLA222180N1901			10



N2121.9 BL

Rocker cover with scene symbol, 1M

Rocker cover with scene symbol for KNX sensor/actuator.

Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.9 BL	2CLA212190N1101			10
full white	–	N2121.9 BB	2CLA212190N1201			10
silver - chrome	–	N2121.9 PL	2CLA212190N1301			10
full anthracite	–	N2121.9 AA	2CLA212190N1601			10
anthracite - chrome	–	N2121.9 AN	2CLA212190N1801			10
champagne - chrome	–	N2121.9 CV	2CLA212190N1901			10




N2121.9R BL

Rocker cover with scene symbol, Right, 1M

Rocker cover with scene symbol for KNX sensor/actuator.

Suitable for codes: right position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.9R BL	2CLA212192N1101			10
full white	–	N2121.9R BB	2CLA212192N1201			10
silver - chrome	–	N2121.9R PL	2CLA212192N1301			10
full anthracite	–	N2121.9R AA	2CLA212192N1601			10
anthracite - chrome	–	N2121.9R AN	2CLA212192N1801			10
champagne - chrome	–	N2121.9R CV	2CLA212192N1901			10



N2221.9 BL

Rocker cover with scene symbol, 2M

Rocker cover with scene symbol for KNX sensor/actuator.

Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.9 BL	2CLA222190N1101			10
full white	–	N2221.9 BB	2CLA222190N1201			10
silver - chrome	–	N2221.9 PL	2CLA222190N1301			10
full anthracite	–	N2221.9 AA	2CLA222190N1601			10
anthracite - chrome	–	N2221.9 AN	2CLA222190N1801			10
champagne - chrome	–	N2221.9 CV	2CLA222190N1901			10



RT/U 1.1.ZW

KNX thermostat, 2M

Standard KNX thermostat equipped with backlight LCD display 4 push buttons on the front for the following functionalities (Operating mode switching, Fan-coil speed manual switching, set-point manual increment/decrement).

Possibility to choose different type of control: 2-point ON/OFF, PWM, Continue, Fan- coil.

Cover plate included.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	RT/U 1.1.ZW	2CSY244280R1202		0.12	1
anthracite	–	RT/U 1.1.ZA	2CSY249370R1202		0.12	1
silver	–	RT/U 1.1.ZS	2CSY242280R1202		0.12	1
champagne	–	RT/U 1.1.ZC	2CSY247370R1202		0.12	1

ABB i-bus® KNX

User Operation – Design Ranges – Chiara



2CSKK1002C

Binary Input, 2-fold, with Rocker Switch

Device equipped with: 1 rocker switch; 2 binary input channels that can be used to interface to KNX system conventional push-buttons/rocker switches, or auxiliary/technical contacts. LEDs for the functional signaling of the load to which the rocker switch is connected. Flush-mounted installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
white	–	2CSKK1002C	2CSK206571R1002		0.12	1



2CSKK1003C

Binary Input, 2-fold, with Rocker Switches, 2 gang

Device equipped with: 2 rocker switches; 2 binary input channels that can be used to interface to KNX system conventional push-buttons/rocker switches, or auxiliary/technical contacts. LEDs for the functional signaling of the load to which the rocker switch is connected. Flush-mounted installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
white	–	2CSKK1003C	2CSK232195R1003			1




2CSKK1202C

Thermostat

Standard KNX thermostat equipped with backlit LCD display 4 push buttons on the front for the following functionalities (Operating mode switching, Fan-coil speed manual switching, set-point manual increment/decrement). Possibility to choose different type of control: 2-point ON/OFF, PWM, Continue, Fan-coil.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	2CSKK1202C	2CSK232205R1202		0.07	1



2CSKK1504C

Set of 4 cover DND/MUR

Cover for Chiara KNX device 2CSKK1002C. With Do-Not-Disturb/Make-Up-Room symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
white	–	2CSKK1504C	2CSK232155R1504			1



Selection Tables

Selection Tables	309
Selection Table According to Order Code	310
Selection Table According to Type	327

Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
1SAP110300R0278	TB5600-2ETH	4013614508912		108	2CDG110107R0011	SD/M 2.6.2	4016779680660	26	26
1SAP131000R0278	PM5630-2ETH	4013614508998		108	2CDG110108R0011	LR/M 1.6.2	4016779680677	26	27
1SAP195800R0101	PS5604-KNX	4013614536946		108	2CDG110109R0011	MT/S 4.12.2M	4016779711876	26	139
1SAP230500R0000	DI572	4013614501449		109	2CDG110110R0011	MT/S 8.12.2M	4016779711869	26	139
1SAP231900R0000	DC562	4016779927574		109	2CDG110111R0011	MT/U 2.12.2	4016779711760	26	139
1SAS010000R0102	DM200-TOOL	4013614525711		109	2CDG110136R0011	SE/S 3.16.1	4016779709774	26	134
1SVR427041R0000	CP-D 24/0.42	4016779661164		12	2CDG110143R0011	SJR/S 4.24.2.1	4016779864466	26	51
1SVR427041R1000	CP-D 12/0.83	4016779661201		12	2CDG110144R0011	SV/S 30.160.1.1	4016779866668	26	9
1SVR427043R0100	CP-D 24/1.3	4016779661171		12	2CDG110145R0011	SV/S 30.320.2.1	4016779837668	26	10
1SVR427043R1200	CP-D 12/2.1	4016779661218		12	2CDG110146R0011	SV/S 30.640.5.1	4016779866699	26	10
1SVR427045R0400	CP-D 24/4.2	4016779661195		12	2CDG110148R0011	EM/S 3.16.1	4016779877060	26	134
1SVR427049R0000	CP-D RU	4016779845267		12	2CDG110149R0011	STR/Z 1.50.1	4016779877169	20	20
1TNE968901R3105	TA565-9	6943747170336		109	2CDG110163R0011	FCL/S 1.6.1.1	4016779877886	26	104
1TNE968901R3105	TA565-9	6943747170336		109	2CDG110164R0011	FCL/S 2.6.1.1	4016779877879	26	104
1TNE968901R3105	TA565-9	6943747170336		110	2CDG110165R0011	RM/S 3.1	4016779881067	26	29
1TNE968901R3105	TA565-9	6943747170336		110	2CDG110166R0011	SV/S 30.320.1.1	4016779906197	26	9
1TNE968901R3105	TA565-9	6943747170336		110	2CDG110167R0011	SV/S 30.640.3.1	4016779906210	26	9
1TNE968901R3106	TA565-11	6943747170343		109	2CDG110168R0011	IO/S 4.6.1.1	4016779881074	26	45
1TNE968901R3106	TA565-11	6943747170343		109	2CDG110169R0011	IO/S 8.6.1.1	4016779881081	26	45
1TNE968901R3106	TA565-11	6943747170343		110	2CDG110170R0011	RM/S 4.1	4016779881265	26	29
1TNE968901R3106	TA565-11	6943747170343		110	2CDG110172R0011	DLR/A 4.8.1.1	4016779882378	26	59
1TNE968901R3106	TA565-11	6943747170343		110	2CDG110175R0011	IPR/S 3.1.1	4016779906487	26	16
1TNE968901R3106	TA565-11	6943747170343		111	2CDG110176R0011	IPR/S 3.5.1	4016779906500	26	15
1TNE968902R1102	AI562	6943747170169		111	2CDG110177R0011	IPS/S 3.1.1	4016779906517	26	16
1TNE968902R1301	AX561	6943747170190		110	2CDG110184R0011	WZ/S 1.3.1.2	4016779928977	26	34
1TNE968902R2203	DO572	6943747170268		110	2CDG110190R0011	AE/S 4.1.1.3	4016779929295	26	33
1TNE968902R2302	DX571	6943747170282		110	2CDG110191R0011	WS/S 4.1.1.2	4016779929370	26	34
2CDG110002R0011	SA/M 2.6.1	4016779583145	26	26	2CDG110192R0011	ABA/S 1.2.1	4016779929936	26	113
2CDG110003R0011	JA/M 2.230.1	4016779583152	26	26	2CDG110198R0011	DG/S 1.64.1.1	4016779579933	26	58
2CDG110004R0011	JA/M 2.24.1	4016779583169	26	26	2CDG110199R0011	DG/S 2.64.1.1	4016779942850	26	58
2CDG110005R0011	BE/M 4.230.1	4016779583114	26	26	2CDG110202R0011	AA/S 4.1.2	4016779962377	26	46
2CDG110006R0011	BE/M 4.24.1	4016779583121	26	26	2CDG110203R0011	AA/A 2.1.2	4016779954075	26	46
2CDG110007R0011	BE/M 4.12.1	4016779583138	26	26	2CDG110204R0011	IPS/S 3.5.1	4016779016414	26	16
2CDG110013R0011	ES/M 2.230.1	4016779583619	26	27	2CDG110205R0011	AC/S 1.1.1	4016779011808	26	105
2CDG110014R0011	ES/M 2.24.1	4016779583626	26	27	2CDG110206R0011	AC/S 1.2.1	4016779015806	26	105
2CDG110024R0011	SCM/S 1.1	4016779583916	26	139	2CDG110207R0011	SUG/U 1.1	4016779997362	26	97
2CDG110025R0011	DG/S 8.1	4016779585828	26	59	2CDG110209R0011	FCC/S 1.4.1.1	4016779011419	26	102
2CDG110028R0011	JA/S 4.5MI.1M	4016779654234	26	51	2CDG110210R0011	FCC/S 1.1.1.1	4016779011426	26	101
2CDG110029R0011	DR/S 4.1	4016779587556	26	11	2CDG110211R0011	FCC/S 1.1.2.1	4016779011433	26	101
2CDG110060R0011	DSM/S 1.1	4016779652056	26	19	2CDG110212R0011	FCC/S 1.2.1.1	4016779011440	26	101
2CDG110065R0011	US/U 12.2	4016779650120	26	33	2CDG110213R0011	FCC/S 1.2.2.1	4016779011457	26	101
2CDG110065R0011	US/U 12.2	4016779497251	26	96	2CDG110214R0011	FCC/S 1.3.1.1	4016779011464	26	102
2CDG110066R0011	EUB/S 1.1	4016779649919	26	136	2CDG110215R0011	FCC/S 1.3.2.1	4016779011471	26	102
2CDG110067R0011	BDB/S 1.1	4016779657532	26	136	2CDG110216R0011	VC/S 4.1.1	4016779011488	26	95
2CDG110070R0011	NTU/S 12.2000.1	4016779681179	26	12	2CDG110217R0011	VC/S 4.2.1	4016779011495	26	95
2CDG110071R0011	UK/S 32.2	4016779655774	26	131	2CDG110218R0011	HCC/S 2.1.1.1	4016779011617	26	107
2CDG110072R0011	ABZ/S 2.1	4016779652360	26	113	2CDG110219R0011	HCC/S 2.1.2.1	4016779011624	26	107
2CDG110073R0011	ABL/S 2.1	4016779652643	26	113	2CDG110220R0011	HCC/S 2.2.1.1	4016779011631	26	107
2CDG110079R0011	SD/S 2.16.1	4016779659963	26	63	2CDG110221R0011	HCC/S 2.2.2.1	4016779011648	26	107
2CDG110080R0011	SD/S 4.16.1	4016779659376	26	63	2CDG110222R0011	BCI/S 1.1.1	4016779011655	26	108
2CDG110081R0011	SD/S 8.16.1	4016779659185	26	63	2CDG110226R0011	QA/S 3.16.1	4016779997751	26	135
2CDG110083R0011	ZS/S 1.1	4016779662079	26	134	2CDG110227R0011	QA/S 3.64.1	4016779997768	26	135
2CDG110086R0011	AE/A 2.1	4016779664011	26	33	2CDG110234R0011	FCC/S 1.5.1.1	4016779011518	26	103
2CDG110087R0011	LR/S 2.16.1	4016779664059	26	63	2CDG110235R0011	FCC/S 1.5.2.1	4016779011525	26	103
2CDG110088R0011	LR/S 4.16.1	4016779664899	26	63	2CDG110243R0011	USB/S 1.2	4016779064507	26	17
2CDG110089R0011	LF/U 2.1	4016779664165	26	63	2CDG110244R0011	SAH/S 8.6.7.1	4016779066310	26	42
2CDG110094R0011	RM/S 1.1	4016779665568	26	29	2CDG110245R0011	SAH/S 16.6.7.1	4016779066792	26	42
2CDG110095R0011	RM/S 2.1	4016779665674	26	29	2CDG110246R0011	SAH/S 24.6.7.1	4013614552540	26	42
2CDG110096R0011	NTI/Z 28.30.1	4016779663168	26	11	2CDG110247R0011	SAH/S 8.10.7.1	4016779066815	26	42
2CDG110100R0011	SA/M 2.16.1	4016779681582	26	26	2CDG110248R0011	SAH/S 16.10.7.1	4016779066822	26	42
2CDG110101R0011	DLR/S 8.16.1M	4016779676564	26	59	2CDG110249R0011	SAH/S 24.10.7.1	4016779066839	26	42
2CDG110104R0011	RC/A 4.2	4016779676472	26	25	2CDG110250R0011	SAH/S 8.16.7.1	4016779066846	26	42
2CDG110106R0011	RC/A 8.2	4016779681261	26	25	2CDG110251R0011	SAH/S 16.16.7.1	4016779066853	26	42

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CDG110252R0011	SAH/S 24.16.7.1	4016779066860	26	42	2CDG120040R0011	FAD/A 1.1	4016779906685	20	114
2CDG110253R0011	SA/S 2.6.2.2	4016779066716	26	43	2CDG120043R0011	PK/E 2.1	4016779906715	20	115
2CDG110254R0011	SA/S 4.6.2.2	4016779066730	26	43	2CDG120044R0011	HS/S 4.2.1	4016779906722	20	66
2CDG110255R0011	SA/S 8.6.2.2	4016779066754	26	43	2CDG120045R0011	LFO/A 1.1	4016779906739	20	66
2CDG110256R0011	SA/S 12.6.2.2	4016779066778	26	43	2CDG120049R0011	TSA/K 230.2	4016779950671	20	97
2CDG110257R0011	SA/S 2.10.2.2	4016779066556	26	43	2CDG120050R0011	TSA/K 24.2	4016779950688	20	97
2CDG110258R0011	SA/S 4.10.2.2	4016779066570	26	43	2CDG120059R0011	LGS/A 1.2	4016779015714	20	105
2CDG110259R0011	SA/S 8.10.2.2	4016779066594	26	43	2CDG120061R0011	VAA/A 6.24.2	4016779063715	20	96
2CDG110260R0011	SA/S 12.10.2.2	4016779066617	26	43	2CDG120070R0011	FAG/A 1.2	4013614556517	20	114
2CDG110261R0011	SA/S 2.16.2.2	4016779066631	26	43	2CDG120071R0011	PS/E 2.2	4013614556548	20	114
2CDG110262R0011	SA/S 4.16.2.2	4016779066655	26	43	2CDG120082R0011	IS/S 8.1.1	4053546045512	20	17
2CDG110263R0011	SA/S 8.16.2.2	4016779066679	26	43	2CDG120083R0011	ISP/S 8.1.1.1	4053546045529	20	17
2CDG110264R0011	SA/S 12.16.2.2	4016779066693	26	43	2CDG120088R0011	WB/Z 1.1.1	4016779139533	20	34
2CDG110265R0011	SA/S 2.16.5.2	4016779066457	26	44	2CDG120089R0011	MG/S 11.100.1.1	4013614571084	20	18
2CDG110266R0011	SA/S 4.16.5.2	4016779066471	26	44	2CDG120091R0011	WES/A 4.1.1	4016779139519	20	34
2CDG110267R0011	SA/S 8.16.5.2	4016779066495	26	44	2CDG120092R0011	ST/K 1.2	4053546160185	20	96
2CDG110268R0011	SA/S 12.16.5.2	4016779066518	26	44	2CDG120093R0011	WB/Z 1.2.1	4053546162417	20	34
2CDG110269R0011	SA/S 2.16.6.2	4016779066327	26	44	2CDG120094R0011	MA/Z 1.50.1	4053546162431	20	34
2CDG110270R0011	SA/S 4.16.6.2	4016779066419	26	44	2CDG120097R0011	TP/U7.1.1-825	4053546185775	26	120
2CDG110271R0011	SA/S 8.16.6.2	4016779066433	26	44	2CDG120098R0011	TP/U7.1.1-811	4053546185799	26	120
2CDG110272R0011	SA/S 12.16.6.2	4016779066532	26	44	2CDG120099R0011	TP/U10.1.1-825	4053546185812	26	121
2CDG110273R0011	DG/S 1.64.5.1	4016779067201	26	58	2CDG120100R0011	TP/U10.1.1-811	4053546185836	26	121
2CDG110274R0011	DG/S 2.64.5.1	4016779067218	26	58	2CDG220023R0011	TD-C 1.1	4013614552410	50	141
2CDG110275R0011	SU/S 30.640.2	4016779085953	26	10	2CDG250003R0011	WRK/W	4016779664042	50	140
2CDG110276R0011	BE/S 4.20.3.2	4053546110821	26	32	2CDG250006R0011	MC-C1.1	4016779067300	50	140
2CDG110277R0011	BE/S 10.20.3.2	4053546110838	26	32	2CDG924003R0011	PS 1/4/6-KNX	4016779667586	20	19
2CDG110278R0011	BE/S 16.20.3.2	4053546110845	26	32	2CDG924004R0011	PS 1/60/6-KNX	4016779667593	20	19
2CDG110279R0011	BE/S 4.230.3.2	4053546110852	26	32	2CDL000001R0001	PS-END 1-S	4016779666985		19
2CDG110280R0011	BE/S 8.230.3.2	4053546110869	26	32	2CKA001754A4107	1724-80	4011395994887	04	258
2CDG110281R0011	BE/S 10.230.3.2	4053546110876	26	32	2CKA001754A4108	1725-80	4011395994924	04	258
2CDG110282R0011	BE/S 12.230.3.2	4053546110883	26	32	2CKA001754A4112	1724-84	4011395996171	04	258
2CDG110283R0011	BE/S 16.230.3.2	4053546110890	26	32	2CKA001754A4113	1725-84	4011395996195	04	258
2CDG110284R0011	JRA/S 2.230.2.2	4053546110814	26	49	2CKA001754A4231	1722-182K	4011395050705	01	257
2CDG110285R0011	JRA/S 4.230.2.2	4053546110906	26	49	2CKA001754A4232	1723-182K	4011395050712	01	257
2CDG110286R0011	JRA/S 8.230.2.2	4053546110913	26	49	2CKA001754A4233	1724-182K	4011395050736	01	257
2CDG110287R0011	JRA/S 12.230.2.2	4053546110920	26	49	2CKA001754A4234	1725-182K	4011395050743	01	257
2CDG110288R0011	JRA/S 2.230.5.2	4053546110937	26	49	2CKA001754A4238	1724-184K	4011395050781	01	257
2CDG110289R0011	JRA/S 4.230.5.2	4053546110944	26	49	2CKA001754A4240	1721-181K	4011395050804	04	257
2CDG110290R0011	JRA/S 8.230.5.2	4053546110951	26	49	2CKA001754A4241	1722-181K	4011395050811	04	257
2CDG110291R0011	JRA/S 12.230.5.2	4053546110968	26	49	2CKA001754A4242	1723-181K	4011395050828	04	257
2CDG110292R0011	JRA/S 4.230.4.2	4053546110975	26	49	2CKA001754A4243	1724-181K	4011395050835	04	257
2CDG110293R0011	JRA/S 8.230.4.2	4053546110982	26	49	2CKA001754A4244	1725-181K	4011395050842	04	257
2CDG110294R0011	JRA/S 4.230.7.2	4053546110999	26	50	2CKA001754A4254	1721-860	4011395056790	04	259
2CDG110295R0011	JRA/S 2.24.2.2	4053546111002	26	50	2CKA001754A4255	1722-860	4011395056813	04	259
2CDG110296R0011	JRA/S 4.24.2.2	4053546111019	26	50	2CKA001754A4256	1723-860	4011395056837	04	259
2CDG110297R0011	JRA/S 8.24.2.2	4053546111026	26	50	2CKA001754A4257	1724-860	4011395056851	04	259
2CDG110298R0011	JRA/S 4.24.5.2	4053546111033	26	50	2CKA001754A4258	1721-821	4011395056875	04	259
2CDG110308R0011	US/U 2.3	4053546111576	26	32	2CKA001754A4259	1722-821	4011395056899	04	259
2CDG110309R0011	US/U 4.3	4053546111583	26	32	2CKA001754A4260	1723-821	4011395056912	04	259
2CDG110310R0011	LK/S 4.3	4016779138819	26	15	2CKA001754A4261	1724-821	4011395056936	04	259
2CDG110311R0011	MPG/S 8.1.1	4016779141222	26	107	2CKA001754A4309	1724-183K	4011395074831	04	257
2CDG110330R0011	VC/S 6.2.2.2	4053546178616	26	95	2CKA001754A4310	1725-183K	4011395074848	04	257
2CDG110331R0011	VC/S 12.2.2.2	4053546178647	26	95	2CKA001754A4319	1723-866K	4011395088371	04	259
2CDG110333R0011	US/U 8.3	4016779710763	26	32	2CKA001754A4320	1724-866K	4011395088395	04	259
2CDG120009R0011	VA/Z 10.1	4016779653190	20	97	2CKA001754A4321	1725-866K	4011395088425	04	259
2CDG120010R0011	VA/Z 50.1	4016779653206	20	97	2CKA001754A4322	1721-825	4011395088913	04	259
2CDG120011R0011	VA/Z 78.1	4016779653213	20	97	2CKA001754A4323	1722-825	4011395088920	04	259
2CDG120012R0011	VA/Z 80.1	4016779653220	20	97	2CKA001754A4324	1722-825	4011395088920	04	259
2CDG120036R0011	IPM/S 1.1	4016779697903	20	17	2CKA001754A4325	1724-825	4011395088944	04	259
2CDG120037R0011	CP-D 24/2.5	4016779697897		12	2CKA001754A4327	1722-80G	4011395113066	04	258
2CDG120037R0011	CP-D 24/2.5	4016779697897	20	130	2CKA001754A4328	1723-80G	4011395113073	04	258
2CDG120037R0011	CP-D 24/2.5	4016779697897	20	206	2CKA001754A4329	1724-80G	4011395113080	04	258
2CDG120039R0011	FW/S 8.2.1	4016779906661	20	114	2CKA001754A4330	1725-80G	4011395113097	04	258

Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA001754A4331	1721-284	4011395113240	01	260	2CKA001754A4498	1721-184K-500	4011395174524	01	257
2CKA001754A4332	1722-284	4011395113257	04	260	2CKA001754A4499	1722-184K-500	4011395174531	01	257
2CKA001754A4333	1723-284	4011395113264	04	260	2CKA001754A4500	1721-866K-500	4011395174548	04	259
2CKA001754A4334	1721-285	4011395113271	04	260	2CKA001754A4501	1722-866K-500	4011395174555	04	259
2CKA001754A4335	1722-285	4011395113288	04	260	2CKA001754A4502	1723-184K-500	4011395174562	01	257
2CKA001754A4336	1723-285	4011395113295	04	260	2CKA001754A4506	1721-182K-500	4011395174609	01	257
2CKA001754A4337	1721-286	4011395113318	04	260	2CKA001754A4517	1725-184K-500	4011395174722	01	257
2CKA001754A4338	1722-286	4011395113325	04	260	2CKA001754A4529	1721-183K-500	4011395175941	04	257
2CKA001754A4339	1723-286	4011395113332	04	260	2CKA001754A4530	1722-183K-500	4011395175958	04	257
2CKA001754A4340	1721-287	4011395113349	04	260	2CKA001754A4531	1721-884K-500	4011395175965	01	257
2CKA001754A4341	1722-287	4011395113356	04	260	2CKA001754A4532	1721-885K-500	4011395175972	04	257
2CKA001754A4342	1723-287	4011395113363	04	260	2CKA001754A4533	1723-183K-500	4011395175996	04	257
2CKA001754A4343	1721-288	4011395113370	04	260	2CKA001754A4534	1722-885K-500	4011395176009	04	257
2CKA001754A4344	1722-288	4011395113387	04	260	2CKA001754A4535	1721-80-500	4011395176115	04	258
2CKA001754A4345	1723-288	4011395113394	04	260	2CKA001754A4536	1721-84-500	4011395176122	01	258
2CKA001754A4346	1724-284	4011395113417	01	261	2CKA001754A4537	1722-80-500	4011395176139	04	258
2CKA001754A4347	1725-284	4011395113424	01	261	2CKA001754A4538	1721-80G-500	4011395176153	04	258
2CKA001754A4348	1724-285	4011395113431	04	261	2CKA001754A4539	1722-84-500	4011395176160	01	258
2CKA001754A4349	1725-285	4011395113448	04	261	2CKA001754A4540	1723-80-500	4011395176177	04	258
2CKA001754A4350	1724-286	4011395113455	04	261	2CKA001754A4541	1723-84-500	4011395176238	01	258
2CKA001754A4351	1725-286	4011395113462	04	261	2CKA001754A4560	1721-838-500	4011395194782	04	262
2CKA001754A4352	1724-287	4011395113479	04	261	2CKA001754A4561	1722-838-500	4011395194799	04	262
2CKA001754A4353	1725-287	4011395113486	04	261	2CKA001754A4562	1723-838-500	4011395194812	04	262
2CKA001754A4354	1724-288	4011395113493	04	261	2CKA001754A4563	1724-838-500	4011395194829	04	263
2CKA001754A4355	1725-288	4011395113516	04	261	2CKA001754A4564	1725-838-500	4011395194836	04	263
2CKA001754A4356	1721-823-101	4011395115220	04	259	2CKA001754A4565	1721-835-500	4011395194843	04	262
2CKA001754A4357	1722-823-101	4011395115237	04	259	2CKA001754A4566	1722-835-500	4011395194850	04	262
2CKA001754A4358	1723-823-101	4011395115244	04	259	2CKA001754A4567	1723-835-500	4011395194867	04	262
2CKA001754A4359	1724-823-101	4011395115251	04	259	2CKA001754A4568	1724-835-500	4011395194874	04	263
2CKA001754A4360	1721-826-101	4011395115268	04	259	2CKA001754A4569	1725-835-500	4011395194881	04	263
2CKA001754A4361	1722-826-101	4011395115275	04	259	2CKA001754A4570	1721-836-500	4011395194898	04	262
2CKA001754A4362	1723-826-101	4011395115282	04	259	2CKA001754A4571	1722-836-500	4011395194911	04	262
2CKA001754A4363	1724-826-101	4011395115299	04	259	2CKA001754A4572	1723-836-500	4011395194928	04	262
2CKA001754A4409	1721-281	4011395126363	04	260	2CKA001754A4573	1724-836-500	4011395194935	04	263
2CKA001754A4410	1722-281	4011395126370	04	260	2CKA001754A4574	1725-836-500	4011395194942	04	263
2CKA001754A4411	1723-281	4011395126387	04	260	2CKA001754A4575	1721-833-500	4011395194959	04	262
2CKA001754A4412	1724-281	4011395126394	04	261	2CKA001754A4576	1722-833-500	4011395194966	04	262
2CKA001754A4413	1725-281	4011395126615	04	261	2CKA001754A4577	1723-833-500	4011395194973	04	262
2CKA001754A4415	1722-884K	4011395128251	01	257	2CKA001754A4578	1724-833-500	4011395194980	04	263
2CKA001754A4416	1723-884K	4011395128268	01	257	2CKA001754A4579	1725-833-500	4011395194997	04	263
2CKA001754A4417	1724-884K	4011395128275	01	257	2CKA001754A4580	1721-848-500	4011395195017	04	262
2CKA001754A4418	1725-884K	4011395128282	01	257	2CKA001754A4581	1722-848-500	4011395195024	04	262
2CKA001754A4421	1723-885K	4011395128329	04	257	2CKA001754A4582	1723-848-500	4011395195031	04	262
2CKA001754A4422	1724-885K	4011395128336	04	257	2CKA001754A4583	1724-848-500	4011395195048	04	263
2CKA001754A4423	1725-885K	4011395128343	04	257	2CKA001754A4584	1725-848-500	4011395195055	04	263
2CKA001754A4437	1721-280	4011395156957	04	260	2CKA001754A4585	1721-845-500	4011395195062	04	262
2CKA001754A4438	1722-280	4011395156964	04	260	2CKA001754A4586	1722-845-500	4011395195123	04	262
2CKA001754A4439	1723-280	4011395156971	04	260	2CKA001754A4587	1723-845-500	4011395195130	04	262
2CKA001754A4440	1724-280	4011395156988	04	261	2CKA001754A4588	1724-845-500	4011395195147	04	263
2CKA001754A4441	1725-280	4011395156995	04	261	2CKA001754A4589	1725-845-500	4011395195154	04	263
2CKA001754A4442	1721-811	4011395157015	04	259	2CKA001754A4590	1721-846-500	4011395195161	04	262
2CKA001754A4443	1722-811	4011395157022	04	259	2CKA001754A4591	1722-846-500	4011395195178	04	262
2CKA001754A4444	1723-811	4011395157039	04	259	2CKA001754A4592	1723-846-500	4011395195185	04	262
2CKA001754A4445	1724-811	4011395157046	04	259	2CKA001754A4593	1724-846-500	4011395195192	04	263
2CKA001754A4471	1721-291-500	4011395165072	04	260	2CKA001754A4594	1725-846-500	4011395195215	04	263
2CKA001754A4472	1722-291-500	4011395165195	04	260	2CKA001754A4595	1721-843-500	4011395195222	04	262
2CKA001754A4473	1723-291-500	4011395165317	04	260	2CKA001754A4596	1722-843-500	4011395195239	04	262
2CKA001754A4474	1724-291-500	4011395165423	04	261	2CKA001754A4597	1723-843-500	4011395195246	04	262
2CKA001754A4475	1725-291-500	4011395165539	04	261	2CKA001754A4598	1724-843-500	4011395195253	04	263
2CKA001754A4482	1722-299-500	4011395165287	04	260	2CKA001754A4599	1725-843-500	4011395195260	04	263
2CKA001754A4483	1723-299-500	4011395165393	04	260	2CKA001754A4600	1721-832-500	4011395195277	04	262
2CKA001754A4484	1724-299-500	4011395165515	04	261	2CKA001754A4601	1722-832-500	4011395195284	04	262
2CKA001754A4485	1725-299-500	4011395165621	04	261	2CKA001754A4602	1723-832-500	4011395195291	04	262

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA001754A4603	1724-832-500	4011395195314	04	263	2CKA001754A4925	1724-456M-500	4011395342954		265
2CKA001754A4604	1725-832-500	4011395195321	04	263	2CKA001754A4929	1725-441M-500	4011395342992		265
2CKA001754A4605	1721-831-500	4011395195338	04	262	2CKA001754A4930	1725-453M-500	4011395343005		265
2CKA001754A4606	1722-831-500	4011395195345	04	262	2CKA001754A4931	1725-456M-500	4011395343012		265
2CKA001754A4607	1723-831-500	4011395195352	04	262	2CKA006115A0183	6125/01-84-500	4011395135594	26	247
2CKA001754A4608	1724-831-500	4011395195369	04	263	2CKA006115A0183	6125/01-84-500	4011395135594	26	247
2CKA001754A4609	1725-831-500	4011395195376	04	263	2CKA006115A0183	6125/01-84-500	4011395135594	26	247
2CKA001754A4683	1721-270	4011395258682	04	260	2CKA006115A0183	6125/01-84-500	4011395135594	26	247
2CKA001754A4684	1722-270	4011395258699	04	260	2CKA006115A0205	6125/01-81-500	4011395139479	26	247
2CKA001754A4685	1723-270	4011395261125	04	260	2CKA006115A0205	6125/01-81-500	4011395139479	26	247
2CKA001754A4686	1724-270	4011395258712	04	261	2CKA006115A0206	6125/01-82-500	4011395139486	26	247
2CKA001754A4687	1725-270	4011395258729	04	261	2CKA006115A0206	6125/01-82-500	4011395139486	26	247
2CKA001754A4693	1721-276	4011395261132	04	260	2CKA006115A0206	6125/01-82-500	4011395139486	26	247
2CKA001754A4694	1722-276	4011395259016	04	260	2CKA006115A0207	6125/01-83-500	4011395139493	26	247
2CKA001754A4695	1723-276	4011395259023	04	260	2CKA006115A0211	6125/01-866-500	4011395139530	26	247
2CKA001754A4696	1724-276	4011395259047	04	261	2CKA006115A0214	6125/01-884-500	4011395139561	26	247
2CKA001754A4697	1725-276	4011395259054	04	261	2CKA006115A0215	6125/01-885-500	4011395139578	26	247
2CKA001754A4703	1721-275	4011395259115	04	260	2CKA006115A0216	6125/02-81-500	4011395139585	26	250
2CKA001754A4704	1722-275	4011395259122	04	260	2CKA006115A0216	6125/02-81-500	4011395139585	26	250
2CKA001754A4705	1723-275	4011395259139	04	260	2CKA006115A0216	6125/02-81-500	4011395139585	26	250
2CKA001754A4706	1724-275	4011395259146	04	261	2CKA006115A0217	6125/02-82-500	4011395139592	26	250
2CKA001754A4707	1725-275	4011395259153	04	261	2CKA006115A0217	6125/02-82-500	4011395139592	26	250
2CKA001754A4841	1721-44G-500	4011395321003	264		2CKA006115A0217	6125/02-82-500	4011395139592	26	250
2CKA001754A4842	1721-44M-500	4011395321010	264		2CKA006115A0217	6125/02-82-500	4011395139592	26	250
2CKA001754A4844	1721-45M-500	4011395321034	264		2CKA006115A0218	6125/02-83-500	4011395139615	26	250
2CKA001754A4849	1722-44G-500	4011395321089	264		2CKA006115A0219	6125/02-84-500	4011395139622	26	250
2CKA001754A4850	1722-44M-500	4011395321096	264		2CKA006115A0219	6125/02-84-500	4011395139622	26	250
2CKA001754A4852	1722-45M-500	4011395321119	264		2CKA006115A0219	6125/02-84-500	4011395139622	26	250
2CKA001754A4857	1723-44G-500	4011395321164	264		2CKA006115A0219	6125/02-84-500	4011395139622	26	250
2CKA001754A4858	1723-44M-500	4011395321171	264		2CKA006115A0223	6125/02-866-500	4011395139660	26	250
2CKA001754A4860	1723-45M-500	4011395321195	264		2CKA006115A0226	6125/02-884-500	4011395139691	26	250
2CKA001754A4865	1724-44G-500	4011395321249	264		2CKA006115A0227	6125/02-885-500	4011395139714	26	250
2CKA001754A4866	1724-44M-500	4011395321256	264		2CKA006115A0443	6125/20-981-500	4011395157817	26	286
2CKA001754A4868	1724-45M-500	4011395321270	264		2CKA006115A0444	6125/98-509	4011395157824	26	292
2CKA001754A4873	1725-44G-500	4011395321324	264		2CKA006115A0452	6125/02-840-500	4011395195536	26	250
2CKA001754A4874	1725-44M-500	4011395321331	264		2CKA006115A0454	6108/60-500	4011395210147	26	277
2CKA001754A4876	1725-45M-500	4011395321355	264		2CKA006115A0474	6108/61-212-500	4011395209929	26	277
2CKA001754A4882	1721-4013	4011395343852	264		2CKA006115A0475	6108/61-214-500	4011395209936	26	277
2CKA001754A4883	1722-4013	4011395343814	264		2CKA006115A0476	6108/61-20-500	4011395209943	26	277
2CKA001754A4884	1723-4013	4011395343777	264		2CKA006115A0477	6108/61-21-500	4011395209950	26	277
2CKA001754A4885	1724-4013	4011395343739	264		2CKA006115A0478	6108/61-22G-500	4011395209967	26	277
2CKA001754A4886	1725-4013	4011395343692	264		2CKA006115A0480	6108/61-24G-500	4011395209981	26	277
2CKA001754A4887	1721-4083	4011395343654	264		2CKA006115A0481	6108/61-260-500	4011395209998	26	277
2CKA001754A4888	1722-4083	4011395343616	264		2CKA006115A0482	6108/61-266-500	4011395210017	26	277
2CKA001754A4889	1723-4083	4011395343579	264		2CKA006115A0483	6108/61-81-500	4011395210024	26	277
2CKA001754A4890	1724-4083	4011395343531	264		2CKA006115A0484	6108/61-82-500	4011395210031	26	277
2CKA001754A4891	1725-4083	4011395343494	264		2CKA006115A0485	6108/61-83-500	4011395210048	26	277
2CKA001754A4892	1721-4086	4011395343456	264		2CKA006115A0486	6108/61-84-500	4011395210055	26	277
2CKA001754A4893	1722-4086	4011395343418	264		2CKA006115A0487	6108/61-884-500	4011395210062	26	277
2CKA001754A4894	1723-4086	4011395343371	264		2CKA006115A0488	6108/61-885-500	4011395210079	26	277
2CKA001754A4895	1724-4086	4011395343333	264		2CKA006115A0492	6108/61-866-500	4011395210123	26	277
2CKA001754A4896	1725-4086	4011395343296	264		2CKA006115A0504	KK/U4.63.1	4011395334409	26	228
2CKA001754A4905	1721-441M-500	4011395342756	265		2CKA006115A0506	KK/U4.55.1	4011395334423	26	223
2CKA001754A4906	1721-453M-500	4011395342763	265		2CKA006115A0506	KK/U4.55.1	4011395334423	26	242
2CKA001754A4907	1721-456M-500	4011395342770	265		2CKA006115A0510	KK/U4.70.1	4011395337776	26	236
2CKA001754A4911	1722-441M-500	4011395342817	265		2CKA006116A0174	6126/01-84-500	4011395135747	26	247
2CKA001754A4912	1722-453M-500	4011395342824	265		2CKA006116A0174	6126/01-84-500	4011395135747	26	247
2CKA001754A4913	1722-456M-500	4011395342831	265		2CKA006116A0174	6126/01-84-500	4011395135747	26	247
2CKA001754A4917	1723-441M-500	4011395342879	265		2CKA006116A0195	6126/01-81-500	4011395139851	26	247
2CKA001754A4918	1723-453M-500	4011395342886	265		2CKA006116A0195	6126/01-81-500	4011395139851	26	247
2CKA001754A4919	1723-456M-500	4011395342893	265		2CKA006116A0196	6126/01-82-500	4011395139868	26	247
2CKA001754A4923	1724-441M-500	4011395342930	265		2CKA006116A0196	6126/01-82-500	4011395139868	26	247
2CKA001754A4924	1724-453M-500	4011395342947	265						



Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA006116A0196	6126/01-82-500	4011395139868	26	247	2CKA006120A0080	BA/U1.0.1	4011395334447	26	242
2CKA006116A0197	6126/01-83-500	4011395139875	26	247	2CKA006120A0080	BA/U1.0.1	4011395334447	26	254
2CKA006116A0201	6126/01-866-500	4011395139936	26	247	2CKA006123A0001	6123/20-500	4011395157978	26	287
2CKA006116A0204	6126/01-884-500	4011395139967	26	247	2CKA006123A0001	6123/20-500	4011395157978	26	295
2CKA006116A0205	6126/01-885-500	4011395139974	26	247	2CKA006123A0002	6123/21-500	4011395157985	26	287
2CKA006116A0206	6126/02-81-500	4011395139981	26	250	2CKA006123A0002	6123/21-500	4011395157985	26	295
2CKA006116A0206	6126/02-81-500	4011395139981	26	250	2CKA006123A0003	6123/22-500	4011395157992	26	287
2CKA006116A0206	6126/02-81-500	4011395139981	26	250	2CKA006123A0003	6123/22-500	4011395157992	26	295
2CKA006116A0207	6126/02-82-500	4011395139998	26	250	2CKA006123A0004	6123/23-500	4011395158012	26	287
2CKA006116A0207	6126/02-82-500	4011395139998	26	250	2CKA006123A0004	6123/23-500	4011395158012	26	295
2CKA006116A0207	6126/02-82-500	4011395139998	26	250	2CKA006123A0005	6123/24-500	4011395176450	26	287
2CKA006116A0207	6126/02-82-500	4011395139998	26	250	2CKA006123A0005	6123/24-500	4011395176450	26	295
2CKA006116A0208	6126/02-83-500	4011395140017	26	250	2CKA006123A0006	6123/26-500	4011395176467	26	287
2CKA006116A0209	6126/02-84-500	4011395140024	26	250	2CKA006123A0006	6123/26-500	4011395176467	26	295
2CKA006116A0209	6126/02-84-500	4011395140024	26	250	2CKA006132A0342	6131/20-24-500	4011395185889	26	80
2CKA006116A0209	6126/02-84-500	4011395140024	26	250	2CKA006132A0343	6131/20-183-500	4011395185896	26	80
2CKA006116A0209	6126/02-84-500	4011395140024	26	250	2CKA006132A0344	6131/21-24-500	4011395185902	26	81
2CKA006116A0213	6126/02-866-500	4011395140062	26	250	2CKA006132A0345	6131/21-183-500	4011395185919	26	81
2CKA006116A0216	6126/02-884-500	4011395140093	26	250	2CKA006132A0346	6131/30-24-500	4011395185926	26	82
2CKA006116A0217	6126/02-885-500	4011395140116	26	250	2CKA006132A0347	6131/30-183-500	4011395185933	26	82
2CKA006116A0218	6126/20-981-500	4011395157848	26	286	2CKA006132A0348	6131/31-24-500	4011395185940	26	83
2CKA006116A0219	6126/98-509	4011395157855	26	292	2CKA006132A0349	6131/31-183-500	4011395185964	26	83
2CKA006116A0227	6126/02-840-500	4011395195543	26	250	2CKA006132A0350	6131/40-24-500	4011395185971	26	84
2CKA006117A0200	6127/01-84-500	4011395135884	26	247	2CKA006132A0351	6131/29-24-500	4011395185988	26	87
2CKA006117A0200	6127/01-84-500	4011395135884	26	247	2CKA006132A0352	6131/29-183-500	4011395185995	26	87
2CKA006117A0200	6127/01-84-500	4011395135884	26	247	2CKA006132A0353	6131/39-24-500	4011395186008	26	87
2CKA006117A0200	6127/01-84-500	4011395135884	26	247	2CKA006132A0354	6131/39-183-500	4011395186015	26	87
2CKA006117A0221	6127/01-81-500	4011395140246	26	247	2CKA006132A0373	6122/10-212-500	4011395211236	26	255
2CKA006117A0221	6127/01-81-500	4011395140246	26	247	2CKA006132A0374	6122/10-214-500	4011395211243	26	255
2CKA006117A0222	6127/01-82-500	4011395140253	26	247	2CKA006132A0376	6122/10-81-500	4011395211267	26	255
2CKA006117A0222	6127/01-82-500	4011395140253	26	247	2CKA006132A0376	6122/10-81-500	4011395211267	26	255
2CKA006117A0222	6127/01-82-500	4011395140253	26	247	2CKA006132A0376	6122/10-81-500	4011395211267	26	255
2CKA006117A0223	6127/01-83-500	4011395140260	26	247	2CKA006132A0377	6122/10-82-500	4011395211274	26	255
2CKA006117A0227	6127/01-866-500	4011395140307	26	247	2CKA006132A0377	6122/10-82-500	4011395211274	26	255
2CKA006117A0230	6127/01-884-500	4011395140338	26	247	2CKA006132A0377	6122/10-82-500	4011395211274	26	255
2CKA006117A0231	6127/01-885-500	4011395140345	26	247	2CKA006132A0377	6122/10-82-500	4011395211274	26	255
2CKA006117A0232	6127/02-81-500	4011395140352	26	250	2CKA006132A0378	6122/10-83-500	4011395211281	26	255
2CKA006117A0232	6127/02-81-500	4011395140352	26	250	2CKA006132A0379	6122/10-84-500	4011395211298	26	255
2CKA006117A0232	6127/02-81-500	4011395140352	26	250	2CKA006132A0379	6122/10-84-500	4011395211298	26	255
2CKA006117A0233	6127/02-82-500	4011395140369	26	250	2CKA006132A0379	6122/10-84-500	4011395211298	26	255
2CKA006117A0233	6127/02-82-500	4011395140369	26	250	2CKA006132A0379	6122/10-84-500	4011395211298	26	255
2CKA006117A0233	6127/02-82-500	4011395140369	26	250	2CKA006132A0380	6122/10-884-500	4011395211311	26	255
2CKA006117A0233	6127/02-82-500	4011395140369	26	250	2CKA006132A0381	6122/10-885-500	4011395211328	26	255
2CKA006117A0234	6127/02-83-500	4011395140376	26	250	2CKA006132A0385	6122/10-866-500	4011395211366	26	255
2CKA006117A0235	6127/02-84-500	4011395140383	26	250	2CKA006132A0399	6131/50-24-500	4011395216446	26	85
2CKA006117A0235	6127/02-84-500	4011395140383	26	250	2CKA006132A0400	6131/50-183-500	4011395216453	26	85
2CKA006117A0235	6127/02-84-500	4011395140383	26	250	2CKA006132A0403	6131/38-24-500	4011395216552	26	87
2CKA006117A0235	6127/02-84-500	4011395140383	26	250	2CKA006132A0404	6131/38-183-500	4011395216583	26	87
2CKA006117A0239	6127/02-866-500	4011395140437	26	250	2CKA006132A0407	6122/10-840-500	4011395218631	26	255
2CKA006117A0242	6127/02-884-500	4011395140468	26	250	2CKA006132A0413	6131/51-24-500	4011395222294	26	86
2CKA006117A0243	6127/02-885-500	4011395140475	26	250	2CKA006132A0414	6131/51-183-500	4011395222317	26	86
2CKA006117A0252	6127/02-840-500	4011395195567	26	250	2CKA006132A0425	BM/A4.1-131	4011395319338	26	88
2CKA006118A0104	6129/20-981-500	4011395157879	26	286	2CKA006132A0426	BM/A4.1-133	4011395319345	26	88
2CKA006118A0105	6129/96-509	4011395157886		293	2CKA006132A0427	BM/A4.1-134	4011395319352	26	88
2CKA006118A0107	6129/21-981-500	4011395157916	26	286	2CKA006132A0428	BM/A4.1-135	4011395319369	26	88
2CKA006118A0108	6129/98-509	4011395157923	26	293	2CKA006132A0429	BM/A4.1-136	4011395319376	26	88
2CKA006120A0072	6120/13-500	4011395102275	26	202	2CKA006132A0436	6131/20-885-500	4011395352465	26	80
2CKA006120A0073	6120/13-508	4011395116586	26	202	2CKA006132A0438	6131/21-885-500	4011395348321	26	81
2CKA006120A0075	6120/12-101-500	4011395135488	26	202	2CKA006132A0440	6131/30-885-500	4011395348345	26	82
2CKA006120A0076	6120/12-101-508	4011395147337	26	202	2CKA006132A0443	6131/31-885-500	4011395348376	26	83
2CKA006120A0080	BA/U1.0.1	4011395334447	26	223	2CKA006132A0446	6131/40-885-500	4011395352472	26	84
2CKA006120A0080	BA/U1.0.1	4011395334447	26	228	2CKA006132A0449	6131/50-885-500	4011395348437	26	85
2CKA006120A0080	BA/U1.0.1	4011395334447	26	236	2CKA006132A0452	6131/51-885-500	4011395348468	26	86

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA006132A0454	6131/29-885-500	4011395348482	26	87	2CKA006155A0061	6109/03-82-500	4011395209226	26	283
2CKA006132A0455	6131/39-885-500	4011395348499	26	87	2CKA006155A0061	6109/03-82-500	4011395209226	26	283
2CKA006132A0459	6131/38-885-500	4011395348536	26	87	2CKA006155A0062	6109/03-83-500	4011395209233	26	283
2CKA006132A0462	PMB/U1.1-916	4011395362761		76	2CKA006155A0063	6109/03-84-500	4011395209240	26	283
2CKA006132A0464	PMB/U2.1-916	4011395362785		77	2CKA006155A0063	6109/03-84-500	4011395209240	26	283
2CKA006132A0466	PMB/U3.1-916	4011395362808		78	2CKA006155A0063	6109/03-84-500	4011395209240	26	283
2CKA006132A0468	BMB/U1.1-916	4011395362822		79	2CKA006155A0064	6109/03-884-500	4011395209257	26	283
2CKA006133A0201	6149/21-500	4011395118962	26	206	2CKA006155A0065	6109/03-885-500	4011395209264	26	283
2CKA006133A0221	6108/06-500	4011395210925	26	267	2CKA006155A0069	6109/03-866-500	4011395209318	26	283
2CKA006133A0223	6108/07-500	4011395210949	26	272	2CKA006197A0053	6109/03-840-500	4011395220795	26	283
2CKA006133A0225	6108/06-AP-500	4011395210963	26	267	2CKA006155A0115	6108/61-914	4011395220818	26	277
2CKA006133A0227	6108/07-AP-500	4011395210987	26	267	2CKA006155A0121	6108/61-840-500	4011395220870	26	277
2CKA006134A0309	6124/08-981-500	4011395189122	26	287	2CKA006181A0013	6109/05-500	4011395208731	26	278
2CKA006134A0310	6124/88-509	4011395189139	26	294	2CKA006197A0047	UD/S 4.210.2.1	4011395251867	33	64
2CKA006134A0313	6109/08-500	4011395208755	26	278	2CKA006197A0049	UD/S 6.210.2.1	4011395251881	33	64
2CKA006134A0315	6109/18-500	4011395208779	26	282	2CKA006197A0053	UD/S 2.315.2.1	4011395251928	33	65
2CKA006134A0317	6109/28-500	4011395208793	26	282	2CKA006197A0057	UD/S 4.315.2.1	4011395251966	33	65
2CKA006134A0319	6108/18-500	4011395211014	26	281	2CKA006197A0061	UD/S 6.315.2.1	4011395252000	33	66
2CKA006134A0331	6128/28-81-500	4011395213810	26	256	2CKA006199A0025	LFW/A.0.70.1-CK	4011395337790	26	236
2CKA006134A0331	6128/28-81-500	4011395213810	26	256	2CKA006199A0041	LFW/A.0.63.1-CK	4011395334485	26	228
2CKA006134A0331	6128/28-81-500	4011395213810	26	256	2CKA006199A0098	LFW/A.1.63.1-81	4011395335772	26	229
2CKA006134A0332	6128/28-82-500	4011395213827	26	256	2CKA006199A0099	LFW/A.1.63.1-82	4011395335789	26	229
2CKA006134A0332	6128/28-82-500	4011395213827	26	256	2CKA006199A0100	LFW/A.1.63.1-83	4011395335796	26	229
2CKA006134A0332	6128/28-82-500	4011395213827	26	256	2CKA006199A0101	LFW/A.1.63.1-84	4011395335802	26	229
2CKA006134A0332	6128/28-82-500	4011395213827	26	256	2CKA006199A0102	LFW/A.1.63.1-884	4011395335819	26	229
2CKA006134A0333	6128/28-83-500	4011395213834	26	256	2CKA006199A0103	LFW/A.1.63.1-885	4011395335826	26	229
2CKA006134A0334	6128/28-84-500	4011395213841	26	256	2CKA006199A0105	LFW/A.1.63.1-866	4011395335840	26	229
2CKA006134A0334	6128/28-84-500	4011395213841	26	256	2CKA006199A0107	LFW/A.2.63.1-81	4011395335857	26	229
2CKA006134A0334	6128/28-84-500	4011395213841	26	256	2CKA006199A0109	LFW/A.2.63.1-83	4011395335871	26	229
2CKA006134A0335	6128/28-866-500	4011395213858	26	256	2CKA006199A0110	LFW/A.2.63.1-84	4011395335888	26	229
2CKA006134A0338	6128/28-884-500	4011395213889	26	256	2CKA006199A0111	LFW/A.2.63.1-884	4011395335895	26	229
2CKA006134A0339	6128/28-885-500	4011395213896	26	256	2CKA006199A0112	LFW/A.2.63.1-885	4011395335901	26	229
2CKA006134A0342	6128/28-840-500	4011395217245	26	256	2CKA006199A0114	LFW/A.2.63.1-866	4011395335925	26	229
2CKA006134A0346	SAR/A 1.01-24	4011395252093	26	104	2CKA006199A0116	LFW/A.3.63.1-81	4011395335932	26	229
2CKA006134A0348	SAF/A 1.01-24	4011395252116	26	104	2CKA006199A0117	LFW/A.3.63.1-82	4011395335949	26	229
2CKA006135A0146	6129/01-84-500	4011395136164	26	251	2CKA006199A0118	LFW/A.3.63.1-83	4011395335956	26	229
2CKA006135A0146	6129/01-84-500	4011395136164	26	251	2CKA006199A0119	LFW/A.3.63.1-84	4011395335963	26	229
2CKA006135A0146	6129/01-84-500	4011395136164	26	251	2CKA006199A0120	LFW/A.3.63.1-884	4011395335970	26	229
2CKA006135A0146	6129/01-84-500	4011395136164	26	251	2CKA006199A0121	LFW/A.3.63.1-885	4011395335987	26	229
2CKA006135A0156	6129/01-81-500	4011395140949	26	251	2CKA006199A0123	LFW/A.3.63.1-866	4011395336007	26	229
2CKA006135A0156	6129/01-81-500	4011395140949	26	251	2CKA006199A0125	LFW/A.4.63.1-81	4011395336014	26	230
2CKA006135A0157	6129/01-82-500	4011395140956	26	251	2CKA006199A0127	LFW/A.4.63.1-83	4011395336038	26	230
2CKA006135A0157	6129/01-82-500	4011395140956	26	251	2CKA006199A0128	LFW/A.4.63.1-84	4011395336045	26	230
2CKA006135A0157	6129/01-82-500	4011395140956	26	251	2CKA006199A0129	LFW/A.4.63.1-884	4011395336052	26	230
2CKA006135A0158	6129/01-83-500	4011395140963	26	251	2CKA006199A0130	LFW/A.4.63.1-885	4011395336069	26	230
2CKA006135A0162	6129/01-866-500	4011395141007	26	251	2CKA006199A0132	LFW/A.4.63.1-866	4011395336083	26	230
2CKA006135A0165	6129/01-884-500	4011395141038	26	251	2CKA006199A0134	LFBT/A.1.63.1-81	4011395336090	26	230
2CKA006135A0166	6129/01-885-500	4011395141045	26	251	2CKA006199A0135	LFBT/A.1.63.1-82	4011395336106	26	230
2CKA006136A0212	6136/07 UP-500	4011395223529	26	122	2CKA006199A0136	LFBT/A.1.63.1-83	4011395336113	26	230
2CKA006136A0218	CT/S 2.1	4011395310168	26	128	2CKA006199A0137	LFBT/A.1.63.1-84	4011395336120	26	230
2CKA006136A0220	VCO/S 150.2	4011395310182	26	130	2CKA006199A0138	LFBT/A.1.63.1-884	4011395336137	26	230
2CKA006138A0003	6138/11-84-500	4011395116098	26	104	2CKA006199A0139	LFBT/A.1.63.1-885	4011395336144	26	230
2CKA006138A0005	6138/11-83-500	4011395116135	26	104	2CKA006199A0141	LFBT/A.1.63.1-866	4011395336168	26	230
2CKA006151A0280	SA/U 1.16.2	4011395309865	26	45	2CKA006199A0143	LFJT/A.1.63.1-81	4011395336175	26	230
2CKA006152A0042	SAH/U 2.16.2	4011395309889	26	45	2CKA006199A0145	LFJT/A.1.63.1-83	4011395336199	26	230
2CKA006155A0051	6109/03-212-500	4011395209035	26	283	2CKA006199A0146	LFJT/A.1.63.1-84	4011395336205	26	230
2CKA006155A0052	6109/03-214-500	4011395209042	26	283	2CKA006199A0147	LFJT/A.1.63.1-884	4011395336212	26	230
2CKA006155A0060	6109/03-81-500	4011395209219	26	283	2CKA006199A0148	LFJT/A.1.63.1-885	4011395336229	26	230
2CKA006155A0060	6109/03-81-500	4011395209219	26	283	2CKA006199A0150	LFJT/A.1.63.1-866	4011395336243	26	230
2CKA006155A0060	6109/03-81-500	4011395209219	26	283	2CKA006199A0152	LFST/A.1.63.1-81	4011395336250	26	231
2CKA006155A0061	6109/03-82-500	4011395209226	26	283	2CKA006199A0153	LFST/A.1.63.1-82	4011395336267	26	231
2CKA006155A0061	6109/03-82-500	4011395209226	26	283	2CKA006199A0154	LFST/A.1.63.1-83	4011395336274	26	231

Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA006199A0155	LFST/A.1.63.1-84	4011395336281	26	231	2CKA006199A0320	LFAW/A.2.63.1-82	4011395336908	26	233
2CKA006199A0156	LFST/A.1.63.1-884	4011395336298	26	231	2CKA006199A0321	LFAW/A.2.63.1-83	4011395336915	26	233
2CKA006199A0157	LFST/A.1.63.1-885	4011395336304	26	231	2CKA006199A0322	LFAW/A.2.63.1-84	4011395336922	26	233
2CKA006199A0159	LFST/A.1.63.1-866	4011395336328	26	231	2CKA006199A0323	LFAW/A.2.63.1-884	4011395336939	26	233
2CKA006199A0162	LFW/A.0.55.1-CK	4011395337066	26	224	2CKA006199A0324	LFAW/A.2.63.1-885	4011395336946	26	233
2CKA006199A0170	LFW/A.1.55.1-914	4011395337233	26	224	2CKA006199A0326	LFAW/A.2.63.1-866	4011395336960	26	233
2CKA006199A0171	LFW/A.2.55.1-914	4011395337240	26	224	2CKA006199A0327	LFMW/A.4.63.1-81	4011395336977	26	234
2CKA006199A0172	LFW/A.3.55.1-914	4011395337257	26	224	2CKA006199A0328	LFMW/A.4.63.1-82	4011395336984	26	234
2CKA006199A0173	LFW/A.4.55.1-914	4011395337264	26	224	2CKA006199A0329	LFMW/A.4.63.1-83	4011395336991	26	234
2CKA006199A0174	LFBT/A.1.55.1-914	4011395337271	26	224	2CKA006199A0330	LFMW/A.4.63.1-84	4011395337004	26	234
2CKA006199A0175	LFJT/A.1.55.1-914	4011395337288	26	224	2CKA006199A0331	LFMW/A.4.63.1-884	4011395337011	26	234
2CKA006199A0176	LFST/A.1.55.1-914	4011395337295	26	224	2CKA006199A0332	LFMW/A.4.63.1-885	4011395337028	26	234
2CKA006199A0185	LFW/A.0.55.91-CK	4011395339084	242		2CKA006199A0334	LFMW/A.4.63.1-866	4011395337042	26	234
2CKA006199A0186	LFW/A.1.55.91-916	4011395339091	243		2CKA006199A0344	LFDW/A.1.55.1-914	4011395337301	26	225
2CKA006199A0187	LFW/A.2.55.91-916	4011395339107	243		2CKA006199A0345	LFJW/A.1.55.1-914	4011395337318	26	225
2CKA006199A0188	LFW/A.3.55.91-916	4011395339114	243		2CKA006199A0346	LFAW/A.1.55.1-914	4011395337325	26	225
2CKA006199A0189	LFW/A.4.55.91-916	4011395339121	243		2CKA006199A0347	LFBT/A.2.55.1-914	4011395337332	26	225
2CKA006199A0263	LFDW/A.1.63.1-81	4011395336335	26	231	2CKA006199A0348	LFJT/A.2.55.1-914	4011395337349	26	225
2CKA006199A0265	LFDW/A.1.63.1-83	4011395336359	26	231	2CKA006199A0349	LFST/A.2.55.1-914	4011395337356	26	225
2CKA006199A0266	LFDW/A.1.63.1-84	4011395336366	26	231	2CKA006199A0350	LFDW/A.2.55.1-914	4011395337363	26	226
2CKA006199A0267	LFDW/A.1.63.1-884	4011395336373	26	231	2CKA006199A0351	LFAW/A.2.55.1-914	4011395337370	26	226
2CKA006199A0268	LFDW/A.1.63.1-885	4011395336380	26	231	2CKA006199A0352	LFMW/A.4.55.1-914	4011395337387	26	226
2CKA006199A0270	LFDW/A.1.63.1-866	4011395336403	26	231	2CKA006199A0435	LFW/A.1.70.1-44G	4011395338445	26	237
2CKA006199A0271	LFJW/A.1.63.1-81	4011395336410	26	231	2CKA006199A0436	LFW/A.2.70.1-44G	4011395338452	26	237
2CKA006199A0272	LFJW/A.1.63.1-82	4011395336427	26	231	2CKA006199A0437	LFW/A.3.70.1-44G	4011395338469	26	237
2CKA006199A0273	LFJW/A.1.63.1-83	4011395336434	26	231	2CKA006199A0438	LFW/A.4.70.1-44G	4011395338476	26	237
2CKA006199A0274	LFJW/A.1.63.1-84	4011395336441	26	231	2CKA006199A0439	LFB/A.1.70.1-44G	4011395338483	26	238
2CKA006199A0275	LFJW/A.1.63.1-884	4011395336458	26	231	2CKA006199A0440	LFJ/A.1.70.1-44G	4011395338490	26	238
2CKA006199A0276	LFJW/A.1.63.1-885	4011395336465	26	231	2CKA006199A0441	LFS/A.1.70.1-44G	4011395338506	26	238
2CKA006199A0278	LFJW/A.1.63.1-866	4011395336489	26	231	2CKA006199A0442	LFDW/A.1.70.1-44G	4011395338513	26	238
2CKA006199A0279	LFAW/A.1.63.1-81	4011395336496	26	232	2CKA006199A0443	LFJW/A.1.70.1-44G	4011395338520	26	239
2CKA006199A0281	LFAW/A.1.63.1-83	4011395336519	26	232	2CKA006199A0444	LFAW/A.1.70.1-44G	4011395338537	26	239
2CKA006199A0282	LFAW/A.1.63.1-84	4011395336526	26	232	2CKA006199A0445	LFBT/A.2.70.1-44G	4011395338544	26	239
2CKA006199A0283	LFAW/A.1.63.1-884	4011395336533	26	232	2CKA006199A0446	LFJT/A.2.70.1-44G	4011395338551	26	239
2CKA006199A0284	LFAW/A.1.63.1-885	4011395336540	26	232	2CKA006199A0447	LFST/A.2.70.1-44G	4011395338568	26	240
2CKA006199A0286	LFAW/A.1.63.1-866	4011395336564	26	232	2CKA006199A0448	LFDW/A.2.70.1-44G	4011395338575	26	240
2CKA006199A0287	LFBT/A.2.63.1-81	4011395336571	26	232	2CKA006199A0449	LFAW/A.2.70.1-44G	4011395338582	26	240
2CKA006199A0288	LFBT/A.2.63.1-82	4011395336588	26	232	2CKA006199A0450	LFMW/A.4.70.1-44G	4011395338599	26	240
2CKA006199A0289	LFBT/A.2.63.1-83	4011395336595	26	232	2CKA006199A0451	LFW/A.1.70.1-44M	4011395338605	26	237
2CKA006199A0290	LFBT/A.2.63.1-84	4011395336601	26	232	2CKA006199A0452	LFW/A.2.70.1-44M	4011395338612	26	237
2CKA006199A0291	LFBT/A.2.63.1-884	4011395336618	26	232	2CKA006199A0453	LFW/A.3.70.1-44M	4011395338629	26	237
2CKA006199A0292	LFBT/A.2.63.1-885	4011395336625	26	232	2CKA006199A0454	LFW/A.4.70.1-44M	4011395338636	26	237
2CKA006199A0294	LFBT/A.2.63.1-866	4011395336649	26	232	2CKA006199A0455	LFB/A.1.70.1-44M	4011395338643	26	238
2CKA006199A0295	LFJT/A.2.63.1-81	4011395336656	26	232	2CKA006199A0456	LFJ/A.1.70.1-44M	4011395338650	26	238
2CKA006199A0297	LFJT/A.2.63.1-83	4011395336670	26	232	2CKA006199A0457	LFS/A.1.70.1-44M	4011395338667	26	238
2CKA006199A0298	LFJT/A.2.63.1-84	4011395336687	26	232	2CKA006199A0458	LFDW/A.1.70.1-44M	4011395338674	26	238
2CKA006199A0299	LFJT/A.2.63.1-884	4011395336694	26	232	2CKA006199A0459	LFJW/A.1.70.1-44M	4011395338681	26	239
2CKA006199A0300	LFJT/A.2.63.1-885	4011395336700	26	232	2CKA006199A0460	LFAW/A.1.70.1-44M	4011395338698	26	239
2CKA006199A0302	LFJT/A.2.63.1-866	4011395336724	26	232	2CKA006199A0461	LFBT/A.2.70.1-44M	4011395338704	26	239
2CKA006199A0303	LFST/A.2.63.1-81	4011395336731	26	233	2CKA006199A0462	LFJT/A.2.70.1-44M	4011395338711	26	239
2CKA006199A0304	LFST/A.2.63.1-82	4011395336748	26	233	2CKA006199A0463	LFST/A.2.70.1-44M	4011395338728	26	240
2CKA006199A0305	LFST/A.2.63.1-83	4011395336755	26	233	2CKA006199A0464	LFDW/A.2.70.1-44M	4011395338735	26	240
2CKA006199A0306	LFST/A.2.63.1-84	4011395336762	26	233	2CKA006199A0465	LFAW/A.2.70.1-44M	4011395338742	26	240
2CKA006199A0307	LFST/A.2.63.1-884	4011395336779	26	233	2CKA006199A0466	LFMW/A.4.70.1-44M	4011395338759	26	240
2CKA006199A0308	LFST/A.2.63.1-885	4011395336786	26	233	2CKA006199A0483	LFW/A.1.70.1-45M	4011395338926	26	237
2CKA006199A0310	LFST/A.2.63.1-866	4011395336809	26	233	2CKA006199A0484	LFW/A.2.70.1-45M	4011395338933	26	237
2CKA006199A0311	LFDW/A.2.63.1-81	4011395336816	26	233	2CKA006199A0485	LFW/A.3.70.1-45M	4011395338940	26	237
2CKA006199A0313	LFDW/A.2.63.1-83	4011395336830	26	233	2CKA006199A0486	LFW/A.4.70.1-45M	4011395338957	26	237
2CKA006199A0314	LFDW/A.2.63.1-84	4011395336847	26	233	2CKA006199A0487	LFB/A.1.70.1-45M	4011395338964	26	238
2CKA006199A0315	LFDW/A.2.63.1-884	4011395336854	26	233	2CKA006199A0488	LFJ/A.1.70.1-45M	4011395338971	26	238
2CKA006199A0316	LFDW/A.2.63.1-885	4011395336861	26	233	2CKA006199A0489	LFS/A.1.70.1-45M	4011395338988	26	238
2CKA006199A0318	LFDW/A.2.63.1-866	4011395336885	26	233	2CKA006199A0490	LFDW/A.1.70.1-45M	4011395338995	26	238
2CKA006199A0319	LFAW/A.2.63.1-81	4011395336892	26	233	2CKA006199A0491	LFJW/A.1.70.1-45M	4011395339008	26	239

Order code	Type	EAN	PG	Page
2CKA006199A0492	LFAW/A.170.1-45M	4011395339015	26	239
2CKA006199A0493	LFBT/A.270.1-45M	4011395339022	26	239
2CKA006199A0494	LFJT/A.270.1-45M	4011395339039	26	239
2CKA006199A0495	LFST/A.270.1-45M	4011395339046	26	240
2CKA006199A0496	LFDW/A.270.1-45M	4011395339053	26	240
2CKA006199A0497	LFAW/A.270.1-45M	4011395339060	26	240
2CKA006199A0498	LFMW/A.470.1-45M	4011395339077	26	240
2CKA006199A0499	LFB/A.155.91-916	4011395339138		243
2CKA006199A0500	LFJ/A.155.91-916	4011395339145		243
2CKA006199A0501	LFS/A.155.91-916	4011395339152		244
2CKA006199A0502	LFDW/A.155.91-916	4011395339169		244
2CKA006199A0503	LFJW/A.155.91-916	4011395339176		244
2CKA006199A0504	LFAW/A.155.91-916	4011395339183		244
2CKA006199A0505	LFBT/A.255.91-916	4011395339190		244
2CKA006199A0506	LFJT/A.255.91-916	4011395339206		244
2CKA006199A0507	LFST/A.255.91-916	4011395339213		245
2CKA006199A0508	LFDW/A.255.91-916	4011395339220		245
2CKA006199A0509	LFAW/A.255.91-916	4011395339237		245
2CKA006199A0510	LFMW/A.455.91-916	4011395339244		245
2CKA006199A0512	CSE/U0.1.1.CK	4011395339268	26	226
2CKA006199A0512	CSE/U0.1.1.CK	4011395339268	26	234
2CKA006199A0512	CSE/U0.1.1.CK	4011395339268	26	240
2CKA006199A0512	CSE/U0.1.1.CK	4011395339268	26	245
2CKA006199A0514	LFW/A.0.63.1-CKL	4011395345177	26	228
2CKA006199A0519	LFW/A.0.70.1-CKL	4011395345221	26	236
2CKA006220A0137	SR-1-81	4011395181492	24	268
2CKA006220A0137	SR-1-81	4011395181492	24	268
2CKA006220A0137	SR-1-81	4011395181492	24	268
2CKA006220A0138	SR-1-83	4011395182178	24	268
2CKA006220A0139	SR-1-84	4011395181836	24	268
2CKA006220A0139	SR-1-84	4011395181836	24	268
2CKA006220A0139	SR-1-84	4011395181836	24	268
2CKA006220A0139	SR-1-84	4011395181836	24	268
2CKA006220A0139	SR-1-84	4011395181836	24	268
2CKA006220A0140	SRL-1-81	4011395181515	24	269
2CKA006220A0140	SRL-1-81	4011395181515	24	269
2CKA006220A0140	SRL-1-81	4011395181515	24	269
2CKA006220A0141	SRL-1-83	4011395182185	24	269
2CKA006220A0142	SRL-1-84	4011395181843	24	269
2CKA006220A0142	SRL-1-84	4011395181843	24	269
2CKA006220A0142	SRL-1-84	4011395181843	24	269
2CKA006220A0142	SRL-1-84	4011395181843	24	269
2CKA006220A0142	SRL-1-84	4011395181843	24	269
2CKA006220A0143	SRB-1-81	4011395181522	24	270
2CKA006220A0143	SRB-1-81	4011395181522	24	270
2CKA006220A0143	SRB-1-81	4011395181522	24	270
2CKA006220A0144	SRB-1-83	4011395182192	24	270
2CKA006220A0145	SRB-1-84	4011395181850	24	270
2CKA006220A0145	SRB-1-84	4011395181850	24	270
2CKA006220A0145	SRB-1-84	4011395181850	24	270
2CKA006220A0145	SRB-1-84	4011395181850	24	270
2CKA006220A0146	SRS-1-81	4011395181539	24	271
2CKA006220A0146	SRS-1-81	4011395181539	24	271
2CKA006220A0146	SRS-1-81	4011395181539	24	271
2CKA006220A0147	SRS-1-83	4011395182215	24	271
2CKA006220A0148	SRS-1-84	4011395181867	24	271
2CKA006220A0148	SRS-1-84	4011395181867	24	271
2CKA006220A0148	SRS-1-84	4011395181867	24	271
2CKA006220A0148	SRS-1-84	4011395181867	24	271
2CKA006220A0149	SRD-1-81	4011395181546	24	272
2CKA006220A0149	SRD-1-81	4011395181546	24	272
2CKA006220A0150	SRD-1-83	4011395182222	24	272
2CKA006220A0151	SRD-1-84	4011395181874	24	272
2CKA006220A0151	SRD-1-84	4011395181874	24	272

Order code	Type	EAN	PG	Page
2CKA006220A0151	SRD-1-84	4011395181874	24	272
2CKA006220A0151	SRD-1-84	4011395181874	24	272
2CKA006220A0152	SR-2-81	4011395181553	24	273
2CKA006220A0152	SR-2-81	4011395181553	24	273
2CKA006220A0153	SR-2-83	4011395182239	24	273
2CKA006220A0154	SR-2-84	4011395181881	24	273
2CKA006220A0154	SR-2-84	4011395181881	24	273
2CKA006220A0154	SR-2-84	4011395181881	24	273
2CKA006220A0154	SR-2-84	4011395181881	24	273
2CKA006220A0155	SRL-2-L-81	4011395181560	24	274
2CKA006220A0155	SRL-2-L-81	4011395181560	24	274
2CKA006220A0155	SRL-2-L-81	4011395181560	24	274
2CKA006220A0156	SRL-2-L-83	4011395182246	24	274
2CKA006220A0157	SRL-2-L-84	4011395181898	24	274
2CKA006220A0157	SRL-2-L-84	4011395181898	24	274
2CKA006220A0157	SRL-2-L-84	4011395181898	24	274
2CKA006220A0157	SRL-2-L-84	4011395181898	24	274
2CKA006220A0158	SRB-2-81	4011395181577	24	273
2CKA006220A0158	SRB-2-81	4011395181577	24	273
2CKA006220A0158	SRB-2-81	4011395181577	24	273
2CKA006220A0159	SRB-2-83	4011395182253	24	273
2CKA006220A0160	SRB-2-84	4011395181911	24	273
2CKA006220A0160	SRB-2-84	4011395181911	24	273
2CKA006220A0160	SRB-2-84	4011395181911	24	273
2CKA006220A0160	SRB-2-84	4011395181911	24	273
2CKA006220A0161	SRS-2-L-81	4011395181584	24	275
2CKA006220A0161	SRS-2-L-81	4011395181584	24	275
2CKA006220A0161	SRS-2-L-81	4011395181584	24	275
2CKA006220A0162	SRS-2-L-83	4011395182260	24	275
2CKA006220A0163	SRS-2-L-84	4011395181928	24	275
2CKA006220A0163	SRS-2-L-84	4011395181928	24	275
2CKA006220A0163	SRS-2-L-84	4011395181928	24	275
2CKA006220A0163	SRS-2-L-84	4011395181928	24	275
2CKA006220A0164	SRD-2-L-81	4011395181591	24	276
2CKA006220A0164	SRD-2-L-81	4011395181591	24	276
2CKA006220A0164	SRD-2-L-81	4011395181591	24	276
2CKA006220A0165	SRD-2-L-83	4011395182277	24	276
2CKA006220A0166	SRD-2-L-84	4011395181935	24	276
2CKA006220A0166	SRD-2-L-84	4011395181935	24	276
2CKA006220A0166	SRD-2-L-84	4011395181935	24	276
2CKA006220A0166	SRD-2-L-84	4011395181935	24	276
2CKA006220A0167	SRL-2-R-81	4011395181614	24	274
2CKA006220A0167	SRL-2-R-81	4011395181614	24	274
2CKA006220A0167	SRL-2-R-81	4011395181614	24	274
2CKA006220A0168	SRL-2-R-83	4011395182284	24	274
2CKA006220A0169	SRL-2-R-84	4011395181942	24	274
2CKA006220A0169	SRL-2-R-84	4011395181942	24	274
2CKA006220A0169	SRL-2-R-84	4011395181942	24	274
2CKA006220A0173	SRS-2-R-81	4011395181638	24	275
2CKA006220A0173	SRS-2-R-81	4011395181638	24	275
2CKA006220A0173	SRS-2-R-81	4011395181638	24	275
2CKA006220A0174	SRS-2-R-83	4011395182314	24	275
2CKA006220A0175	SRS-2-R-84	4011395181966	24	275
2CKA006220A0175	SRS-2-R-84	4011395181966	24	275
2CKA006220A0175	SRS-2-R-84	4011395181966	24	275
2CKA006220A0175	SRS-2-R-84	4011395181966	24	275
2CKA006220A0182	SR-1-212	4011395180747	24	268
2CKA006220A0183	SR-1-214	4011395181133	24	268
2CKA006220A0184	SRL-1-212	4011395180754	24	269
2CKA006220A0185	SRL-1-214	4011395181140	24	269
2CKA006220A0186	SRB-1-212	4011395180761	24	270
2CKA006220A0187	SRB-1-214	4011395181157	24	270

Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA006220A0188	SRS-1-212	4011395180778	24	271	2CKA006220A0519	SRS-1-82	4011395203484	24	271
2CKA006220A0189	SRS-1-214	4011395181171	24	271	2CKA006220A0519	SRS-1-82	4011395203484	24	271
2CKA006220A0190	SRD-1-212	4011395180785	24	272	2CKA006220A0519	SRS-1-82	4011395203484	24	271
2CKA006220A0191	SRD-1-214	4011395181188	24	272	2CKA006220A0520	SRD-1-82	4011395203491	24	272
2CKA006220A0192	SR-2-212	4011395180792	24	273	2CKA006220A0520	SRD-1-82	4011395203491	24	272
2CKA006220A0193	SR-2-214	4011395181195	24	273	2CKA006220A0520	SRD-1-82	4011395203491	24	272
2CKA006220A0194	SRL-2-L-212	4011395180808	24	274	2CKA006220A0520	SRD-1-82	4011395203491	24	272
2CKA006220A0195	SRL-2-L-214	4011395181218	24	274	2CKA006220A0521	SR-2-82	4011395203507	24	273
2CKA006220A0196	SRB-2-212	4011395180815	24	273	2CKA006220A0521	SR-2-82	4011395203507	24	273
2CKA006220A0197	SRB-2-214	4011395181225	24	273	2CKA006220A0521	SR-2-82	4011395203507	24	273
2CKA006220A0198	SRS-2-L-212	4011395180839	24	275	2CKA006220A0522	SRL-2-L-82	4011395203606	24	274
2CKA006220A0199	SRS-2-L-214	4011395181232	24	275	2CKA006220A0522	SRL-2-L-82	4011395203606	24	274
2CKA006220A0200	SRD-2-L-212	4011395180846	24	276	2CKA006220A0522	SRL-2-L-82	4011395203606	24	274
2CKA006220A0201	SRD-2-L-214	4011395181249	24	276	2CKA006220A0522	SRL-2-L-82	4011395203606	24	274
2CKA006220A0202	SRL-2-R-212	4011395180853	24	274	2CKA006220A0523	SRB-2-82	4011395203613	24	273
2CKA006220A0203	SRL-2-R-214	4011395181263	24	274	2CKA006220A0523	SRB-2-82	4011395203613	24	273
2CKA006220A0206	SRS-2-R-212	4011395180884	24	275	2CKA006220A0523	SRB-2-82	4011395203613	24	273
2CKA006220A0207	SRS-2-R-214	4011395181287	24	275	2CKA006220A0523	SRB-2-82	4011395203613	24	273
2CKA006220A0242	CP-FCC-81	4011395187456	24	281	2CKA006220A0524	SRS-2-L-82	4011395203620	24	275
2CKA006220A0242	CP-FCC-81	4011395187456	24	281	2CKA006220A0524	SRS-2-L-82	4011395203620	24	275
2CKA006220A0242	CP-FCC-81	4011395187456	24	281	2CKA006220A0524	SRS-2-L-82	4011395203620	24	275
2CKA006220A0243	CP-FCC-83	4011395187463	24	281	2CKA006220A0524	SRS-2-L-82	4011395203620	24	275
2CKA006220A0244	CP-FCC-84	4011395187470	24	281	2CKA006220A0525	SRD-2-L-82	4011395203637	24	276
2CKA006220A0244	CP-FCC-84	4011395187470	24	281	2CKA006220A0525	SRD-2-L-82	4011395203637	24	276
2CKA006220A0244	CP-FCC-84	4011395187470	24	281	2CKA006220A0525	SRD-2-L-82	4011395203637	24	276
2CKA006220A0244	CP-FCC-84	4011395187470	24	281	2CKA006220A0525	SRD-2-L-82	4011395203637	24	276
2CKA006220A0245	CP-FCC-212	4011395187487	24	281	2CKA006220A0526	SRD-2-R-82	4011395203644	24	276
2CKA006220A0246	CP-FCC-214	4011395187494	24	281	2CKA006220A0526	SRD-2-R-82	4011395203644	24	276
2CKA006220A0258	SRD-2-R-81	4011395188477	24	276	2CKA006220A0526	SRD-2-R-82	4011395203644	24	276
2CKA006220A0258	SRD-2-R-81	4011395188477	24	276	2CKA006220A0527	SRL-2-R-82	4011395203651	24	274
2CKA006220A0259	SRD-2-R-83	4011395188484	24	276	2CKA006220A0527	SRL-2-R-82	4011395203651	24	274
2CKA006220A0260	SRD-2-R-84	4011395188491	24	276	2CKA006220A0527	SRL-2-R-82	4011395203651	24	274
2CKA006220A0260	SRD-2-R-84	4011395188491	24	276	2CKA006220A0528	SRS-2-R-82	4011395203668	24	275
2CKA006220A0260	SRD-2-R-84	4011395188491	24	276	2CKA006220A0528	SRS-2-R-82	4011395203668	24	275
2CKA006220A0260	SRD-2-R-84	4011395188491	24	276	2CKA006220A0528	SRS-2-R-82	4011395203668	24	275
2CKA006220A0261	SRD-2-R-212	4011395188507	24	276	2CKA006220A0528	SRS-2-R-82	4011395203668	24	275
2CKA006220A0262	SRD-2-R-214	4011395188514	24	276	2CKA006220A0532	CP-FCC-82	4011395205716	24	281
2CKA006220A0371	SR-1-840	4011395195598	24	268	2CKA006220A0532	CP-FCC-82	4011395205716	24	281
2CKA006220A0372	SRL-1-840	4011395195604	24	269	2CKA006220A0532	CP-FCC-82	4011395205716	24	281
2CKA006220A0373	SRB-1-840	4011395195611	24	270	2CKA006220A0532	CP-FCC-82	4011395205716	24	281
2CKA006220A0374	SRS-1-840	4011395195628	24	271	2CKA006220A0533	SR-1-866	4011395203699	24	268
2CKA006220A0375	SRD-1-840	4011395195635	24	272	2CKA006220A0534	SRL-1-866	4011395203705	24	269
2CKA006220A0377	SRL-2-L-840	4011395195659	24	274	2CKA006220A0535	SRB-1-866	4011395203712	24	270
2CKA006220A0378	SRB-2-840	4011395195666	24	273	2CKA006220A0536	SRS-1-866	4011395203729	24	271
2CKA006220A0379	SRS-2-L-840	4011395195673	24	275	2CKA006220A0537	SRD-1-866	4011395203743	24	272
2CKA006220A0380	SRD-2-L-840	4011395195680	24	276	2CKA006220A0538	SR-2-866	4011395203750	24	273
2CKA006220A0381	SRL-2-R-840	4011395195697	24	274	2CKA006220A0539	SRL-2-L-866	4011395203767	24	274
2CKA006220A0382	SRS-2-R-840	4011395195710	24	275	2CKA006220A0540	SRB-2-866	4011395203774	24	273
2CKA006220A0383	SRD-2-R-840	4011395195727	24	276	2CKA006220A0541	SRS-2-L-866	4011395203781	24	275
2CKA006220A0516	SR-1-82	4011395203453	24	268	2CKA006220A0542	SRD-2-L-866	4011395203798	24	276
2CKA006220A0516	SR-1-82	4011395203453	24	268	2CKA006220A0543	SRD-2-R-866	4011395203811	24	276
2CKA006220A0516	SR-1-82	4011395203453	24	268	2CKA006220A0544	SRL-2-R-866	4011395203828	24	274
2CKA006220A0517	SRL-1-82	4011395203460	24	269	2CKA006220A0545	SRS-2-R-866	4011395203835	24	275
2CKA006220A0517	SRL-1-82	4011395203460	24	269	2CKA006220A0549	CP-FCC-866	4011395205730	24	281
2CKA006220A0517	SRL-1-82	4011395203460	24	269	2CKA006220A0550	SR-1-803	4011395203866	24	268
2CKA006220A0517	SRL-1-82	4011395203460	24	269	2CKA006220A0551	SRL-1-803	4011395203873	24	269
2CKA006220A0518	SRB-1-82	4011395203477	24	270	2CKA006220A0552	SRB-1-803	4011395203880	24	270
2CKA006220A0518	SRB-1-82	4011395203477	24	270	2CKA006220A0553	SRS-1-803	4011395203897	24	271
2CKA006220A0518	SRB-1-82	4011395203477	24	270	2CKA006220A0554	SRD-1-803	4011395203910	24	272
2CKA006220A0518	SRB-1-82	4011395203477	24	270	2CKA006220A0555	SR-2-803	4011395203927	24	273
2CKA006220A0519	SRS-1-82	4011395203484	24	271	2CKA006220A0556	SRL-2-L-803	4011395203934	24	274

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA006220A0557	SRB-2-803	4011395203941	24	273	2CKA006300A1611	TZW/U.0.1-CK	4011395254325	26	197
2CKA006220A0558	SRS-2-L-803	4011395203958	24	275	2CKA006300A1612	TB/U4.5.1-CG	4011395256268	26	189
2CKA006220A0559	SRD-2-L-803	4011395203965	24	276	2CKA006300A1633	TZE/U.0.1-CK	4011395258293	26	197
2CKA006220A0560	SRD-2-R-803	4011395203972	24	276	2CKA006300A1641	TB/U1-CG	4011395296424	26	192
2CKA006220A0561	SRL-2-R-803	4011395203989	24	274	2CKA006300A1641	TB/U1-CG	4011395296424	26	194
2CKA006220A0562	SRS-2-R-803	4011395203996	24	275	2CKA006300A1641	TB/U1-CG	4011395296424	26	188
2CKA006220A0566	CP-FCC-803	4011395205754	24	281	2CKA006300A1642	TB/U2-CG	4011395297261	26	188
2CKA006220A0601	SR-1-884	4011395204337	24	268	2CKA006300A1642	TB/U2-CG	4011395297261	26	188
2CKA006220A0602	SRL-1-884	4011395204344	24	269	2CKA006300A1642	TB/U2-CG	4011395297261	26	192
2CKA006220A0603	SRB-1-884	4011395204368	24	270	2CKA006300A1642	TB/U2-CG	4011395297261	26	194
2CKA006220A0604	SRS-1-884	4011395204351	24	271	2CKA006300A1643	TB/U4-CG	4011395297278	26	188
2CKA006220A0605	SRD-1-884	4011395204382	24	272	2CKA006300A1643	TB/U4-CG	4011395297278	26	189
2CKA006220A0606	SR-2-884	4011395204399	24	273	2CKA006300A1643	TB/U4-CG	4011395297278	26	192
2CKA006220A0607	SRL-2-L-884	4011395204412	24	274	2CKA006300A1643	TB/U4-CG	4011395297278	26	194
2CKA006220A0608	SRB-2-884	4011395204429	24	273	2CKA006300A1644	TB/U6-CG	4011395297285	26	189
2CKA006220A0609	SRS-2-L-884	4011395204436	24	275	2CKA006300A1644	TB/U6-CG	4011395297285	26	189
2CKA006220A0610	SRD-2-L-884	4011395204443	24	276	2CKA006300A1644	TB/U6-CG	4011395297285	26	192
2CKA006220A0611	SRD-2-R-884	4011395204450	24	276	2CKA006300A1644	TB/U6-CG	4011395297285	26	194
2CKA006220A0612	SRL-2-R-884	4011395204467	24	274	2CKA006300A1645	TB/U12-CG	4011395297292	26	189
2CKA006220A0613	SRS-2-R-884	4011395204474	24	275	2CKA006300A1645	TB/U12-CG	4011395297292	26	189
2CKA006220A0617	CP-FCC-884	4011395205822	24	281	2CKA006300A1646	TA/U3-CG	4011395297308	26	191
2CKA006220A0618	SR-1-885	4011395204511	24	268	2CKA006300A1646	TA/U3-CG	4011395297308	26	193
2CKA006220A0619	SRL-1-885	4011395204528	24	269	2CKA006300A1646	TA/U3-CG	4011395297308	26	196
2CKA006220A0620	SRB-1-885	4011395204535	24	270	2CKA006300A1647	TR/U-CG	4011395297315	26	190
2CKA006220A0621	SRS-1-885	4011395204542	24	271	2CKA006300A1647	TR/U-CG	4011395297315	26	193
2CKA006220A0622	SRD-1-885	4011395204559	24	272	2CKA006300A1647	TR/U-CG	4011395297315	26	195
2CKA006220A0623	SR-2-885	4011395204566	24	273	2CKA006300A1648	TBR/U4-CG	4011395297322	26	190
2CKA006220A0624	SRL-2-L-885	4011395204573	24	274	2CKA006300A1648	TBR/U4-CG	4011395297322	26	190
2CKA006220A0625	SRB-2-885	4011395204580	24	273	2CKA006300A1653	TSN/U-CG	4011395297377	26	191
2CKA006220A0626	SRS-2-L-885	4011395204597	24	275	2CKA006300A1654	TBW/U-CG	4011395297384	26	191
2CKA006220A0627	SRD-2-L-885	4011395204610	24	276	2CKA006300A1654	TBW/U-CG	4011395297384	26	193
2CKA006220A0628	SRD-2-R-885	4011395204627	24	276	2CKA006300A1654	TBW/U-CG	4011395297384	26	195
2CKA006220A0629	SRL-2-R-885	4011395204634	24	274	2CKA006310A0078	6345-866-101-500	4011395118689	34	204
2CKA006220A0630	SRS-2-R-885	4011395204641	24	275	2CKA006310A0080	6345-825-101-500	4011395118726	34	204
2CKA006220A0634	CP-FCC-885	4011395205846	24	281	2CKA006310A0081	6345-24G-101-500	4011395118733	34	204
2CKA006300A1538	TB/U1.1.1-CG	4011395230725	26	188	2CKA006310A0093	6353/20-860-500	4011395118924	34	206
2CKA006300A1539	TB/U2.4.1-CG	4011395230732	26	188	2CKA006310A0094	6353/30-860-500	4011395118931	34	206
2CKA006300A1540	TB/U2.5.1-CG	4011395230749	26	188	2CKA006310A0095	6353/40-860-500	4011395118948	34	206
2CKA006300A1541	TB/U4.4.1-CG	4011395230756	26	188	2CKA006310A0096	6353/50-860-500	4011395118955	34	206
2CKA006300A1542	TB/U6.4.1-CG	4011395230763	26	189	2CKA006310A0106	6340-866-101-500	4011395130889	34	203
2CKA006300A1543	TB/U12.7.1-CG	4011395230770	26	189	2CKA006310A0108	6340-825-101-500	4011395130919	34	203
2CKA006300A1544	TB/U12.8.1-CG	4011395230787	26	189	2CKA006310A0109	6340-24G-101-500	4011395130926	34	203
2CKA006300A1545	TBR/U4.7.1-CG	4011395230794	26	190	2CKA006310A0114	6341-866-101-500	4011395130971	34	203
2CKA006300A1546	TBR/U4.8.1-CG	4011395230817	26	190	2CKA006310A0116	6341-825-101-500	4011395130995	34	203
2CKA006300A1547	TR/U.1.1-CG	4011395230824	26	190	2CKA006310A0117	6341-24G-101-500	4011395131008	34	203
2CKA006300A1548	TBW/U.1.1-CG	4011395230831	26	191	2CKA006310A0122	6342-866-101-500	4011395131053	34	203
2CKA006300A1549	TA/U3.1.1-CG	4011395230848	26	191	2CKA006310A0124	6342-825-101-500	4011395131077	34	203
2CKA006300A1578	TB/U1.2.1-CG	4011395231159	26	194	2CKA006310A0125	6342-24G-101-500	4011395131084	34	203
2CKA006300A1579	TB/U2.8.1-CG	4011395231166	26	192	2CKA006310A0135	6346/10-101-500	4011395131190	34	202
2CKA006300A1580	TB/U2.7.1-CG	4011395231173	26	194	2CKA006310A0137	6346/11-101-500	4011395131220	34	202
2CKA006300A1581	TB/U4.7.1-CG	4011395231180	26	194	2CKA006310A0139	6346/12-101-500	4011395131244	34	203
2CKA006300A1582	TB/U6.7.1-CG	4011395231197	26	194	2CKA006310A0144	6348-860-101-500	4011395131299	34	204
2CKA006300A1583	TR/U.2.1-CG	4011395231203	26	195	2CKA006310A0146	6348-825-101-500	4011395131312	34	204
2CKA006300A1584	TBW/U.2.1-CG	4011395231210	26	195	2CKA006310A0147	6348-24G-101-500	4011395131329	34	204
2CKA006300A1585	TA/U3.2.1-CG	4011395231227	26	196	2CKA006310A0152	6349-860-101-500	4011395131374	34	205
2CKA006300A1590	TB/U1.3.1-CG	4011395231289	26	192	2CKA006310A0154	6349-825-101-500	4011395131404	34	205
2CKA006300A1593	TB/U4.8.1-CG	4011395231326	26	192	2CKA006310A0155	6349-24G-101-500	4011395131428	34	205
2CKA006300A1594	TB/U6.8.1-CG	4011395231333	26	192	2CKA006310A0157	6350-825-101-500	4011395131442	34	204
2CKA006300A1595	TR/U.3.1-CG	4011395231340	26	193	2CKA006310A0162	6352-860-101-500	4011395131497	34	205
2CKA006300A1596	TBW/U.3.1-CG	4011395231357	26	193	2CKA006310A0164	6352-825-101-500	4011395131510	34	205
2CKA006300A1597	TA/U3.3.1-CG	4011395231364	26	193	2CKA006310A0165	6352-24G-101-500	4011395131527	34	205
2CKA006300A1602	TB/U6.5.1-CG	4011395254165	26	189	2CKA006310A0168	6340-811-101-500	4011395156742	34	203
2CKA006300A1603	TSN/U.2.1-CG	4011395254172	26	191	2CKA006310A0170	6341-811-101-500	4011395156766	34	203

Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA006310A0172	6342-811-101-500	4011395156780	34	203	2CKA006330A0129	SLY/A.0.1-884	4011395299746	26	220
2CKA006310A0176	6345-811-101-500	4011395156834	34	204	2CKA006330A0130	SLY/A.0.1-885	4011395299753	26	220
2CKA006310A0178	6348-811-101-500	4011395156858	34	204	2CKA006330A0131	SLY/A.0.1-83	4011395299760	26	220
2CKA006310A0180	6349-811-101-500	4011395156872	34	205	2CKA006330A0163	SB/U2.0.2-84	4011395356203		208
2CKA006310A0182	6352-811-101-500	4011395156896	34	205	2CKA006330A0164	SB/U2.0.2-884			208
2CKA006310A0183	6351/08-825-500	4011395198407	34	205	2CKA006330A0165	SB/U2.0.2-83			208
2CKA006330A0002	SBS/U6.0.1-84	4011395255087	26	216	2CKA006330A0166	SB/U2.0.2-885			208
2CKA006330A0004	SBR/U6.0.1-84	4011395255667	26	216	2CKA006330A0171	SB/U4.0.2-84	4011395356289		208
2CKA006330A0006	SBS/U10.0.1-84	4011395255124	26	216	2CKA006330A0172	SB/U4.0.2-884	4011395356296		208
2CKA006330A0008	SBR/U10.0.1-84	4011395255179	26	217	2CKA006330A0173	SB/U4.0.2-83	4011395356302		208
2CKA006330A0010	SBC/U6.0.1-84	4011395255193	26	217	2CKA006330A0174	SB/U4.0.2-885	4011395356319		208
2CKA006330A0012	SBC/U10.0.1-84	4011395255216	26	217	2CKA006330A0179	SB/U6.0.2-84	4011395356364		208
2CKA006330A0014	SB/U8.0.1-84	4011395255247	26	218	2CKA006330A0180	SB/U6.0.2-884	4011395356371		208
2CKA006330A0016	SB/U12.0.1-84	4011395255469	26	218	2CKA006330A0181	SB/U6.0.2-83	4011395356388		208
2CKA006330A0018	SAS/A.0.1-84	4011395255483	26	218	2CKA006330A0182	SB/U6.0.2-885	4011395356395		208
2CKA006330A0020	SAB/A.0.1-84	4011395255506	26	218	2CKA006330A0187	SBOC/U6.0.2-84	4011395356449		209
2CKA006330A0022	SBC/A.0.1-84	4011395255520	26	219	2CKA006330A0188	SBOC/U6.0.2-884	4011395356456		209
2CKA006330A0024	SLM/A.0.1-84	4011395255544	26	219	2CKA006330A0189	SBOC/U6.0.2-83	4011395356463		209
2CKA006330A0026	SLB/A.0.1-84	4011395255568	26	219	2CKA006330A0190	SBOC/U6.0.2-885	4011395356470		209
2CKA006330A0028	SLX/A.0.1-84	4011395255582	26	220	2CKA006330A0195	SBOC/U12.0.2-84	4011395356524		210
2CKA006330A0030	SLY/A.0.1-84	4011395264973	26	220	2CKA006330A0196	SBOC/U12.0.2-884	4011395356531		210
2CKA006330A0036	SBS/U6.0.1-884	4011395298701	26	216	2CKA006330A0197	SBOC/U12.0.2-83	4011395356548		210
2CKA006330A0037	SBS/U6.0.1-885	4011395298718	26	216	2CKA006330A0198	SBOC/U12.0.2-885	4011395356555		210
2CKA006330A0038	SBS/U6.0.1-83	4011395298725	26	216	2CKA006330A0203	SAM/A.0.2-84	4011395356609		214
2CKA006330A0042	SBR/U6.0.1-884	4011395298763	26	216	2CKA006330A0206	SAM/A.0.2-885	4011395356630		214
2CKA006330A0043	SBR/U6.0.1-885	4011395298770	26	216	2CKA006330A0211	SBS/U6.0.2-84	4011395356685		210
2CKA006330A0044	SBR/U6.0.1-83	4011395298787	26	216	2CKA006330A0212	SBS/U6.0.2-884	4011395356692		210
2CKA006330A0048	SBS/U10.0.1-884	4011395298824	26	216	2CKA006330A0213	SBS/U6.0.2-885	4011395356708		210
2CKA006330A0049	SBS/U10.0.1-885	4011395298831	26	216	2CKA006330A0214	SBS/U6.0.2-83	4011395356715		210
2CKA006330A0050	SBS/U10.0.1-83	4011395298848	26	216	2CKA006330A0219	SBR/U6.0.2-84	4011395356760		211
2CKA006330A0054	SBR/U10.0.1-884	4011395298886	26	217	2CKA006330A0220	SBR/U6.0.2-884	4011395356777		211
2CKA006330A0055	SBR/U10.0.1-885	4011395298893	26	217	2CKA006330A0221	SBR/U6.0.2-885	4011395356784		211
2CKA006330A0056	SBR/U10.0.1-83	4011395298909	26	217	2CKA006330A0222	SBR/U6.0.2-83	4011395356791		211
2CKA006330A0060	SBC/U6.0.1-884	4011395298947	26	217	2CKA006330A0227	SBS/U10.0.2-84	4011395356845		211
2CKA006330A0061	SBC/U6.0.1-885	4011395298954	26	217	2CKA006330A0228	SBS/U10.0.2-884	4011395356852		211
2CKA006330A0062	SBC/U6.0.1-83	4011395298961	26	217	2CKA006330A0229	SBS/U10.0.2-885	4011395356869		211
2CKA006330A0066	SBC/U10.0.1-884	4011395299005	26	217	2CKA006330A0230	SBS/U10.0.2-83	4011395356876		211
2CKA006330A0067	SBC/U10.0.1-885	4011395299012	26	217	2CKA006330A0235	SBR/U10.0.2-84	4011395356920		212
2CKA006330A0068	SBC/U10.0.1-83	4011395299029	26	217	2CKA006330A0236	SBR/U10.0.2-884	4011395356937		212
2CKA006330A0072	SB/U8.0.1-884	4011395299067	26	218	2CKA006330A0237	SBR/U10.0.2-885	4011395356944		212
2CKA006330A0073	SB/U8.0.1-885	4011395299081	26	218	2CKA006330A0238	SBR/U10.0.2-83	4011395356951		212
2CKA006330A0074	SB/U8.0.1-83	4011395299098	26	218	2CKA006330A0243	SBRC/U6.0.1-84	4011395357002		212
2CKA006330A0078	SB/U12.0.1-884	4011395299135	26	218	2CKA006330A0244	SBRC/U6.0.1-884	4011395357019		212
2CKA006330A0079	SB/U12.0.1-885	4011395299142	26	218	2CKA006330A0245	SBRC/U6.0.1-885	4011395357026		212
2CKA006330A0080	SB/U12.0.1-83	4011395299159	26	218	2CKA006330A0246	SBRC/U6.0.1-83	4011395357033		212
2CKA006330A0084	SAS/A.0.1-884	4011395299296	26	218	2CKA006330A0251	SBRC/U10.0.1-84	4011395357088		213
2CKA006330A0085	SAS/A.0.1-885	4011395299302	26	218	2CKA006330A0252	SBRC/U10.0.1-884	4011395357095		213
2CKA006330A0086	SAS/A.0.1-83	4011395299319	26	218	2CKA006330A0253	SBRC/U10.0.1-885	4011395364444		213
2CKA006330A0090	SAB/A.0.1-884	4011395299357	26	218	2CKA006330A0254	SBRC/U10.0.1-83	4011395364451		213
2CKA006330A0091	SAB/A.0.1-885	4011395299364	26	218	2CKA006330A0259	SB/U8.0.2-84	4011395357163		209
2CKA006330A0092	SAB/A.0.1-83	4011395299371	26	218	2CKA006330A0260	SB/U8.0.2-884	4011395357170		209
2CKA006330A0097	SLS/A.0.1-884	4011395299425	26	219	2CKA006330A0261	SB/U8.0.2-885	4011395357187		209
2CKA006330A0098	SLS/A.0.1-885	4011395299432	26	219	2CKA006330A0262	SB/U8.0.2-83	4011395357194		209
2CKA006330A0099	SLS/A.0.1-83	4011395299449	26	219	2CKA006330A0267	SB/U12.0.2-84	4011395357248		209
2CKA006330A0105	SLM/A.0.1-884	4011395299500	26	219	2CKA006330A0268	SB/U12.0.2-884	4011395357255		209
2CKA006330A0106	SLM/A.0.1-885	4011395299517	26	219	2CKA006330A0269	SB/U12.0.2-885	4011395357262		209
2CKA006330A0107	SLM/A.0.1-83	4011395299524	26	219	2CKA006330A0270	SB/U12.0.2-83	4011395357279		209
2CKA006330A0113	SLB/A.0.1-884	4011395299586	26	219	2CKA006330A0725	SLS/A.0.2-84	4011395365601		214
2CKA006330A0114	SLB/A.0.1-885	4011395299593	26	219	2CKA006330A0726	SLS/A.0.2-884	4011395365618		214
2CKA006330A0115	SLB/A.0.1-83	4011395299609	26	219	2CKA006330A0727	SLS/A.0.2-885	4011395365625		214
2CKA006330A0121	SLX/A.0.1-884	4011395299661	26	220	2CKA006330A0728	SLS/A.0.2-83	4011395365632		214
2CKA006330A0122	SLX/A.0.1-885	4011395299678	26	220	2CKA006330A0733	SLM/A.0.2-84	4011395365687		215
2CKA006330A0123	SLX/A.0.1-83	4011395299685	26	220	2CKA006330A0734	SLM/A.0.2-884	4011395365694		215

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CKA006330A0735	SLM/A.0.2-885	4011395365960		215	2CKA006800A2960	64762-82-500	4011395293539	19	254
2CKA006330A0736	SLM/A.0.2-83	4011395365717		215	2CKA006800A2962	64762-83-500	4011395293546	19	254
2CKA006330A0741	SLB/A.0.2-84	4011395365762		215	2CKA006800A2964	64762-84-500	4011395293553	19	254
2CKA006330A0742	SLB/A.0.2-884	4011395365779		215	2CKA006800A2964	64762-84-500	4011395293553	19	254
2CKA006330A0743	SLB/A.0.2-885	4011395365786		215	2CKA006800A2964	64762-84-500	4011395293553	19	254
2CKA006330A0744	SLB/A.0.2-83	4011395365793		215	2CKA006800A2964	64762-84-500	4011395293553	19	254
2CKA006330A0749	SLX/A.0.2-84	4011395365847		215	2CKA006800A2968	64762-884-500	4011395293577	19	254
2CKA006330A0750	SLX/A.0.2-884	4011395365854		215	2CKA006800A2970	64762-885-500	4011395293584	19	254
2CKA006330A0751	SLX/A.0.2-885	4011395365861		215	2CKA006800A2971	64762-840-500	4011395293591	19	254
2CKA006330A0752	SLX/A.0.2-83	4011395365878		215	2CKA006800A2973	64762-866-500	4011395293607	19	254
2CKA006330A0755	SAS/A.0.2-84	4011395365977		214	2CKA006800A2995	64764-81-500	4011395293751	19	253
2CKA006330A0756	SAS/A.0.2-885	4011395365915		214	2CKA006800A2995	64764-81-500	4011395293751	19	253
2CKA006330A0759	SAB/A.0.2-84	4011395365946		214	2CKA006800A2995	64764-81-500	4011395293751	19	253
2CKA006330A0760	SAB/A.0.2-885	4011395365953		214	2CKA006800A2997	64764-82-500	4011395293768	19	253
2CKA006599A1193	2114-212	4011395378700	19	279	2CKA006800A2997	64764-82-500	4011395293768	19	253
2CKA006599A1466	6541-20	4011395381007	19	279	2CKA006800A2997	64764-82-500	4011395293768	19	253
2CKA006599A1524	6541-21	4011395381502	19	279	2CKA006800A2997	64764-82-500	4011395293768	19	253
2CKA006599A2076	6541-74	4011395541807	19	279	2CKA006800A2999	64764-83-500	4011395293775	19	253
2CKA006599A2332	6541-24G	4011395708606	19	279	2CKA006800A3001	64764-84-500	4011395293782	19	253
2CKA006599A2832	6541-82	4011395995693	19	279	2CKA006800A3001	64764-84-500	4011395293782	19	253
2CKA006599A2832	6541-82	4011395995693	19	279	2CKA006800A3001	64764-84-500	4011395293782	19	253
2CKA006599A2832	6541-82	4011395995693	19	279	2CKA006800A3001	64764-84-500	4011395293782	19	253
2CKA006599A2835	6541-84	4011395996638	19	279	2CKA006800A3005	64764-884-500	4011395293805	19	253
2CKA006599A2835	6541-84	4011395996638	19	279	2CKA006800A3007	64764-885-500	4011395293812	19	253
2CKA006599A2835	6541-84	4011395996638	19	279	2CKA006800A3008	64764-840-500	4011395293829	19	253
2CKA006599A2835	6541-84	4011395996638	19	279	2CKA006800A3010	64764-866-500	4011395293836	19	253
2CKA006599A2856	6541-266	4011395006344	19	279	2CKA006800A3059	64764-916-510	4011395316368	19	253
2CKA006599A2882	6541-81	4011395056424	19	279	2CKA006800A3084	6851/EA-131-500	4011395319444	29	89
2CKA006599A2882	6541-81	4011395056424	19	279	2CKA006800A3086	6851/EA-133-500	4011395319468	29	89
2CKA006599A2885	6541-83	4011395074459	19	279	2CKA006800A3088	6851/EA-134-500	4011395319482	29	89
2CKA006599A2919	6541-783	4011395083468	19	279	2CKA006800A3090	6851/EA-135-500	4011395319505	29	89
2CKA006599A2924	6541-866	4011395088159	19	279	2CKA006800A3092	6851/EA-136-500	4011395319529	29	89
2CKA006599A2962	6541-884	4011395129647	19	279	2CKA006800A3094	6851/DR-131-500	4011395319543	29	89
2CKA006599A2967	6541-885	4011395129654	19	279	2CKA006800A3096	6851/DR-133-500	4011395319567	29	89
2CKA006599A2971	6541-774	4011395129562	19	279	2CKA006800A3098	6851/DR-134-500	4011395319581	29	89
2CKA006599A2975	6541-775	4011395136928	19	279	2CKA006800A3100	6851/DR-135-500	4011395319604	29	89
2CKA006599A3008	2114-214-500	4011395175170	19	280	2CKA006800A3102	6851/DR-136-500	4011395319628	29	89
2CKA006800A2514	6828	4011395137451	14	142	2CLA212100N1101	N2121 BL	8427238241845		302
2CKA006800A2515	6829-84	4011395137468	14	142	2CLA212100N1201	N2121 BB	8427238241852		302
2CKA006800A2720	6833-84-500	4011395186961	14	141	2CLA212100N1301	N2121 PL	8427238241869		302
2CKA006800A2721	6833/01-84-500	4011395186978	14	141	2CLA212100N1601	N2121 AA	8427238241876		302
2CKA006800A2883	64765-81-500	4011395293058	19	252	2CLA212100N1801	N2121 AN	8427238241883		302
2CKA006800A2883	64765-81-500	4011395293058	19	252	2CLA212100N1901	N2121 CV	8427238241890		302
2CKA006800A2883	64765-81-500	4011395293058	19	252	2CLA212110N1101	N2121.1 BL	8427238242026		303
2CKA006800A2885	64765-82-500	4011395293065	19	252	2CLA212110N1201	N2121.1 BB	8427238242033		303
2CKA006800A2885	64765-82-500	4011395293065	19	252	2CLA212110N1301	N2121.1 PL	8427238242040		303
2CKA006800A2885	64765-82-500	4011395293065	19	252	2CLA212110N1601	N2121.1 AA	8427238242057		303
2CKA006800A2885	64765-82-500	4011395293065	19	252	2CLA212110N1801	N2121.1 AN	8427238242064		303
2CKA006800A2887	64765-83-500	4011395293072	19	252	2CLA212110N1901	N2121.1 CV	8427238242071		303
2CKA006800A2889	64765-84-500	4011395293089	19	252	2CLA212112N1101	N2121.1R BL	8427238247915		303
2CKA006800A2889	64765-84-500	4011395293089	19	252	2CLA212112N1201	N2121.1R BB	8427238247922		303
2CKA006800A2889	64765-84-500	4011395293089	19	252	2CLA212112N1301	N2121.1R PL	8427238247939		303
2CKA006800A2889	64765-84-500	4011395293089	19	252	2CLA212112N1601	N2121.1R AA	8427238247946		303
2CKA006800A2893	64765-884-500	4011395293102	19	252	2CLA212112N1801	N2121.1R AN	8427238247953		303
2CKA006800A2895	64765-885-500	4011395293119	19	252	2CLA212112N1901	N2121.1R CV	8427238247960		303
2CKA006800A2896	64765-840-500	4011395293126	19	252	2CLA212130N1101	N2121.3 BL	8427238242088		304
2CKA006800A2898	64765-866-500	4011395293133	19	252	2CLA212130N1201	N2121.3 BB	8427238242095		304
2CKA006800A2958	64762-81-500	4011395293522	19	254	2CLA212130N1301	N2121.3 PL	8427238242101		304
2CKA006800A2958	64762-81-500	4011395293522	19	254	2CLA212130N1601	N2121.3 AA	8427238242118		304
2CKA006800A2958	64762-81-500	4011395293522	19	254	2CLA212130N1801	N2121.3 AN	8427238242125		304
2CKA006800A2960	64762-82-500	4011395293539	19	254	2CLA212130N1901	N2121.3 CV	8427238242132		304
2CKA006800A2960	64762-82-500	4011395293539	19	254	2CLA212150N1101	N2121.5 BL	8427238242149		304
2CKA006800A2960	64762-82-500	4011395293539	19	254	2CLA212150N1201	N2121.5 BB	8427238242156		304

Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CLA212150N1301	N2121.5 PL	8427238242163		304	2CLA222160N1301	N2221.6 PL	8427238100555		293
2CLA212150N1601	N2121.5 AA	8427238242170		304	2CLA222160N1801	N2221.6 AN	8427238100548		293
2CLA212150N1801	N2121.5 AN	8427238242187		304	2CLA222170N1101	N2221.7 BL	8427238100654		293
2CLA212150N1901	N2121.5 CV	8427238242194		304	2CLA222170N1301	N2221.7 PL	8427238100678		293
2CLA212152N1101	N2121.5R BL	8427238247977		305	2CLA222170N1801	N2221.7 AN	8427238100661		293
2CLA212152N1201	N2121.5R BB	8427238247984		305	2CLA222180N1101	N2221.8 BL	8427238242569		306
2CLA212152N1301	N2121.5R PL	8427238247991		305	2CLA222180N1201	N2221.8 BB	8427238242576		306
2CLA212152N1601	N2121.5R AA	8427238248004		305	2CLA222180N1301	N2221.8 PL	8427238242583		306
2CLA212152N1801	N2121.5R AN	8427238248011		305	2CLA222180N1601	N2221.8 AA	8427238242590		306
2CLA212152N1901	N2121.5R CV	8427238248028		305	2CLA222180N1801	N2121.8R AN	8427238242606		306
2CLA212180N1101	N2121.8 BL	8427238242200		305	2CLA222180N1801	N2221.8 AN	8427238242606		306
2CLA212180N1201	N2121.8 BB	8427238242217		305	2CLA222180N1901	N2121.8R CV	8427238242613		306
2CLA212180N1301	N2121.8 PL	8427238242224		305	2CLA222180N1901	N2221.8 CV	8427238242613		306
2CLA212180N1601	N2121.8 AA	8427238242231		305	2CLA222190N1101	N2221.9 BL	8427238242620		307
2CLA212180N1801	N2121.8 AN	8427238242248		305	2CLA222190N1201	N2221.9 BB	8427238242637		307
2CLA212180N1901	N2121.8 CV	8427238242255		305	2CLA222190N1301	N2221.9 PL	8427238242644		307
2CLA212182N1101	N2121.8R BL	8427238248035		306	2CLA222190N1601	N2221.9 AA	8427238242651		307
2CLA212182N1201	N2121.8R BB	8427238248042		306	2CLA222190N1801	N2221.9 AN	8427238242668		307
2CLA212182N1301	N2121.8R PL	8427238248059		306	2CLA222190N1901	N2221.9 CV	8427238242675		307
2CLA212182N1601	N2121.8R AA	8427238248066		306	2CLA224040N1101	N2240.4 BL	8427238100715		294
2CLA212190N1101	N2121.9 BL	8427238242262		306	2CLA224040N1301	N2240.4 PL	8427238100739		294
2CLA212190N1201	N2121.9 BB	8427238242279		306	2CLA224040N1801	N2240.4 AN	8427238100722		294
2CLA212190N1301	N2121.9 PL	8427238242286		306	2CLA224140N1101	N2241.4 BL	8427238100814		294
2CLA212190N1601	N2121.9 AA	8427238242293		306	2CLA224140N1301	N2241.4 PL	8427238100838		294
2CLA212190N1801	N2121.9 AN	8427238242309		306	2CLA224140N1801	N2241.4 AN	8427238100821		294
2CLA212190N1901	N2121.9 CV	8427238242316		306	2CLA227100B1101	AMD22710 BL	8427238259666		300
2CLA212192N1101	N2121.9R BL	8427238248097		307	2CLA227100B1301	AMD22710 PL	8427238259673		300
2CLA212192N1201	N2121.9R BB	8427238248103		307	2CLA227100B1801	AMD22710 AN	8427238259680		300
2CLA212192N1301	N2121.9R PL	8427238248110		307	2CLA227100B1901	AMD22710 CV	8427238259697		300
2CLA212192N1601	N2121.9R AA	8427238248127		307	2CLA227100N1102	N2271 BL	8427238111902		295
2CLA212192N1801	N2121.9R AN	8427238248134		307	2CLA227100N1802	N2271 AN	8427238111896		295
2CLA212192N1901	N2121.9R CV	8427238248141		307	2CLA227100N1902	N2271 CV	8427238111933		295
2CLA222100N1101	N2221 BL	8427238241906		302	2CLA227100N2102	N2271 WG	8427238111971		295
2CLA222100N1201	N2221 BB	8427238241913		302	2CLA227100N2202	N2271 PZ	8427238111964		295
2CLA222100N1301	N2221 PL	8427238241920		302	2CLA227100N3002	N2271 CB	8427238111919		295
2CLA222100N1601	N2221 AA	8427238241937		302	2CLA227100N3102	N2271 CN	8427238111926		295
2CLA222100N1801	N2221 AN	8427238241944		302	2CLA227100N3502	N2271 CP	8427238115436		295
2CLA222100N1901	N2221 CV	8427238241951		302	2CLA227100N3702	N2271 CC	8427238115443		295
2CLA222110N1101	N2221.1 BL	8427238242385		303	2CLA227100N3802	N2271 CF	8427238115450		295
2CLA222110N1201	N2221.1 BB	8427238242392		303	2CLA227100N3902	N2271 CH	8427238115474		295
2CLA222110N1301	N2221.1 PL	8427238242408		303	2CLA227100N4002	N2271 OX	8427238111940		295
2CLA222110N1601	N2221.1 AA	8427238242415		303	2CLA227110N1102	N2271.1 BL	8427238111995		295
2CLA222110N1801	N2221.1 AN	8427238242422		303	2CLA227110N1302	N2271.1 PL	8427238112015		295
2CLA222110N1901	N2221.1 CV	8427238242439		303	2CLA227110N1802	N2271.1 AN	8427238111988		295
2CLA222120N1101	N2221.2 BL	8427238100326		292	2CLA227110N1902	N2271.1 CV	8427238112008		295
2CLA222120N1301	N2221.2 PL	8427238100340		292	2CLA227200N1102	N2272 BL	8427238112053		296
2CLA222120N1801	N2221.2 AN	8427238100333		292	2CLA227200N1302	N2272 PL	8427238112107		296
2CLA222130N1101	N2221.3 BL	8427238242446		304	2CLA227200N1802	N2272 AN	8427238112046		296
2CLA222130N1201	N2221.3 BB	8427238242453		304	2CLA227200N1902	N2272 CV	8427238112084		296
2CLA222130N1301	N2221.3 PL	8427238242460		304	2CLA227200N2102	N2272 WG	8427238112121		296
2CLA222130N1601	N2221.3 AA	8427238242477		304	2CLA227200N2202	N2272 PZ	8427238112114		296
2CLA222130N1801	N2221.3 AN	8427238242484		304	2CLA227200N3002	N2272 CB	8427238112060		296
2CLA222130N1901	N2221.3 CV	8427238242491		304	2CLA227200N3102	N2272 CN	8427238112077		296
2CLA222140N1101	N2221.4 BL	8427238100432		292	2CLA227200N3502	N2272 CP	8427238115481		296
2CLA222140N1301	N2221.4 PL	8427238100456		292	2CLA227200N3702	N2272 CC	8427238115498		296
2CLA222140N1801	N2221.4 AN	8427238100449		292	2CLA227200N3802	N2272 CF	8427238115504		296
2CLA222150N1101	N2221.5 BL	8427238242507		305	2CLA227200N3902	N2272 CH	8427238115511		296
2CLA222150N1201	N2221.5 BB	8427238242514		305	2CLA227200N4002	N2272 OX	8427238112091		296
2CLA222150N1301	N2221.5 PL	8427238242521		305	2CLA227210N1102	N2272.1 BL	8427238112145		296
2CLA222150N1601	N2221.5 AA	8427238242538		305	2CLA227210N1302	N2272.1 PL	8427238112169		296
2CLA222150N1801	N2221.5 AN	8427238242545		305	2CLA227210N1802	N2272.1 AN	8427238112138		296
2CLA222150N1901	N2221.5 CV	8427238242552		305	2CLA227210N1902	N2272.1 CV	8427238112152		296
2CLA222160N1101	N2221.6 BL	8427238100531		293	2CLA227300N1102	N2273 BL	8427238112190		297

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2CLA227300N1302	N2273 PL	8427238112244		297	2CLA667200N1101	AMD5253-ST	8427238096896		288
2CLA227300N1802	N2273 AN	8427238112183		297	2CLA667200N1501	AMD5253-SB	8427238096902		288
2CLA227300N1902	N2273 CV	8427238112220		297	2CLA667200N1601	AMD5253-AG	8427238096919		288
2CLA227300N2102	N2273 WG	8427238112268		297	2CLA667200N1701	AMD5253-MG	8427238096926		288
2CLA227300N2202	N2273 PZ	8427238112251		297	2CLA667200N3001	AMD5253-WG	8427238222783		288
2CLA227300N3002	N2273 CB	8427238112206		297	2CLA667200N3101	AMD5253-BG	8427238222790		288
2CLA227300N3102	N2273 CN	8427238112213		297	2CLA667200N6201	AMD5253-DU	8427238245775		288
2CLA227300N3502	N2273 CP	8427238115528		297	2CLA667200N6601	AMD5253-MO	8427238245799		288
2CLA227300N3702	N2273 CC	8427238115535		297	2CLA897100A1758	1721-4073	8427238272290		264
2CLA227300N3802	N2273 CF	8427238115542		297	2CLA897100A2958	1721-4097	8427238272306		264
2CLA227300N3902	N2273 CH	8427238115559		297	2CLA897100A3958	1721-4028	8427238272313		264
2CLA227300N4002	N2273 OX	8427238112237		297	2CLA897200A1758	1722-4073	8427238272337		264
2CLA227310N1102	N2273.1 BL	8427238112282		297	2CLA897200A2958	1722-4097	8427238272344		264
2CLA227310N1302	N2273.1 PL	8427238112305		297	2CLA897200A3958	1722-4028	8427238272351		264
2CLA227310N1802	N2273.1 AN	8427238112275		297	2CLA897300A1758	1723-4073	8427238272375		264
2CLA227310N1902	N2273.1 CV	8427238112299		297	2CLA897300A2958	1723-4097	8427238272382		264
2CLA227400N1102	N2274 BL	8427238112329		298	2CLA897300A3958	1723-4028	8427238272399		264
2CLA227400N1302	N2274 PL	8427238112374		298	2CLA897400A1758	1724-4073	8427238272412		264
2CLA227400N1802	N2274 AN	8427238112312		298	2CLA897400A2958	1724-4097	8427238272429		264
2CLA227400N1902	N2274 CV	8427238112350		298	2CLA897400A3958	1724-4028	8427238272436		264
2CLA227400N2102	N2274 WG	8427238112398		298	2CLA897500A1758	1725-4073	8427238272443		264
2CLA227400N2202	N2274 PZ	8427238112381		298	2CLA897500A2958	1725-4097	8427238272450		264
2CLA227400N3002	N2274 CB	8427238112336		298	2CLA897500A3958	1725-4028	8427238272467		264
2CLA227400N3102	N2274 CN	8427238112343		298	2CSK206571R1002	2CSKK1002C	8012542065715		308
2CLA227400N3502	N2274 CP	8427238115566		298	2CSK232155R1504	2CSKK1504C	8012542321552		308
2CLA227400N3702	N2274 CC	8427238115573		298	2CSK232195R1003	2CSKK1003C	8012542321958		308
2CLA227400N3802	N2274 CF	8427238115580		298	2CSK232205R1202	2CSKK1202C	8012542322054		308
2CLA227400N3902	N2274 CH	8427238115597		298	2CSY233741S3611	TZE/U.0.3.CK	8012542337416		197
2CLA227400N4002	N2274 OX	8427238112367		298	2CSY242150R1106	RA/U 2.8.1	8012542149354		301
2CLA227410N1102	N2274.1 BL	8427238112411		298	2CSY242280R1202	RT/U 1.1.ZS	8012542149859		307
2CLA227410N1302	N2274.1 PL	8427238112435		298	2CSY244280R1202	RT/U 1.1.ZW	8012542149859		307
2CLA227410N1802	N2274.1 AN	8427238112404		298	2CSY244490R1012	RS/U 1.1	8012542574521		301
2CLA227410N1902	N2274.1 CV	8427238112428		298	2CSY245271S3601	TZE/U.0.2.CK	8012542452713	26	197
2CLA237190N1002	N2371.9V	8427238106748		299	2CSY247240R1105	RB/U 1.1	8012542149255		302
2CLA237200N2202	N2372.1 PZ	8427238106793		299	2CSY247370R1202	RT/U 1.1.ZC	8012542149859		307
2CLA237200N3002	N2372.1 CB	8427238106809		299	2CSY247450R1003	RS/U 2.1	8012542563624		301
2CLA237200N3102	N2372.1 CN	8427238106816		299	2CSY249370R1202	RT/U 1.1.ZA	8012542149859		307
2CLA237200N4002	N2372.1 OX	8427238106823		299	2CSY249580R1103	RA/U 1.16.1	8012542149057		301
2CLA237210N1102	N2372.1 BL	8427238101972		299	2TAZ730000R0010	PESX/2.10.1-001	6957625316679		172
2CLA237210N1302	N2372.1 PL	8427238106755		299	2TAZ730000R0011	PESB/2.10.1-001	6957625316853		172
2CLA237210N1802	N2372.1 AN	8427238106762		299	2TAZ730000R0012	PESR/2.10.1-001	6957625317034		173
2CLA237210N1902	N2372.1 CV	8427238106779		299	2TAZ730000R0013	PESJ/2.10.1-001	6957625317218		173
2CLA247200B1101	AMD24720 BL	8427238260112		300	2TAZ730000R0014	PESD/2.10.1-001	6957625317393		173
2CLA247200B1301	AMD24720 PL	8427238260129		300	2TAZ730000R0015	PESF/2.10.1-001	6957625317577		174
2CLA247200B1801	AMD24720 AN	8427238260136		300	2TAZ730000R0016	PESZ/2.10.1-001	6957625317751		174
2CLA247200B1901	AMD24720 CV	8427238260143		300	2TAZ730000R0020	PESX/2.10.1-002	6957625316648		172
2CLA267310B1101	AMD26731 BL	8427238260211		300	2TAZ730000R0021	PESB/2.10.1-002	6957625316822		172
2CLA267310B1301	AMD26731 PL	8427238260228		300	2TAZ730000R0022	PESR/2.10.1-002	6957625317003		173
2CLA267310B1801	AMD26731 AN	8427238260235		300	2TAZ730000R0023	PESJ/2.10.1-002	6957625317188		173
2CLA267310B1901	AMD26731 CV	8427238260242		300	2TAZ730000R0024	PESD/2.10.1-002	6957625317362		173
2CLA287410B1101	AMD28741 BL	8427238260310		300	2TAZ730000R0025	PESF/2.10.1-002	6957625317546		174
2CLA287410B1301	AMD28741 PL	8427238260327		300	2TAZ730000R0026	PESZ/2.10.1-002	6957625317720		174
2CLA287410B1801	AMD28741 AN	8427238260334		300	2TAZ730000R1310	PESX/2.10.1-131	6957625316730		172
2CLA287410B1901	AMD28741 CV	8427238260341		300	2TAZ730000R1311	PESB/2.10.1-131	6957625316914		172
2CLA627190N1001	AMD5053	8427238099149		288	2TAZ730000R1312	PESR/2.10.1-131	6957625317096		173
2CLA637100N1101	AMD5153-ST	8427238096810		288	2TAZ730000R1313	PESJ/2.10.1-131	6957625317270		173
2CLA637100N1501	AMD5153-SB	8427238096827		288	2TAZ730000R1314	PESD/2.10.1-131	6957625317454		173
2CLA637100N1601	AMD5153-AG	8427238096834		288	2TAZ730000R1315	PESF/2.10.1-131	6957625317638		174
2CLA637100N1701	AMD5153-MG	8427238096841		288	2TAZ730000R1316	PESZ/2.10.1-131	6957625317812		174
2CLA637100N3001	AMD5153-WG	8427238222769		288	2TAZ730000R1510	PESX/2.10.1-151	6957625316761		172
2CLA637100N3101	AMD5153-BG	8427238222776		288	2TAZ730000R1511	PESB/2.10.1-151	6957625316945		172
2CLA637100N6201	AMD5153-DU	8427238245478		288	2TAZ730000R1512	PESR/2.10.1-151	6957625317126		173
2CLA637100N6601	AMD5153-MO	8427238245492		288	2TAZ730000R1513	PESJ/2.10.1-151	6957625317300		173

Selection Table According to Order Code

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2TAZ730000R1514	PESD/2.10.1-151	6957625317485		173	2TAZ730010R0014	PESD/235.10.1-001	6957625317386		177
2TAZ730000R1515	PESF/2.10.1-151	6957625317669		174	2TAZ730010R0015	PESF/235.10.1-001	6957625317560		178
2TAZ730000R1516	PESZ/2.10.1-151	6957625317843		174	2TAZ730010R0016	PESZ/235.10.1-001	6957625317744		179
2TAZ730000R2010	PESX/2.10.1-201	6957625316709		172	2TAZ730010R0020	PESX/235.10.1-002	6957625316631		177
2TAZ730000R2011	PESB/2.10.1-201	6957625316884		172	2TAZ730010R0021	PESB/235.10.1-002	6957625316815		177
2TAZ730000R2012	PESR/2.10.1-201	6957625317065		173	2TAZ730010R0022	PESR/235.10.1-002	6957625316990		178
2TAZ730000R2013	PESJ/2.10.1-201	6957625317249		173	2TAZ730010R0023	PESJ/235.10.1-002	6957625317171		178
2TAZ730000R2014	PESD/2.10.1-201	6957625317423		173	2TAZ730010R0024	PESD/235.10.1-002	6957625317355		177
2TAZ730000R2015	PESF/2.10.1-201	6957625317607		174	2TAZ730010R0025	PESF/235.10.1-002	6957625317539		178
2TAZ730000R2016	PESZ/2.10.1-201	6957625317782		174	2TAZ730010R0026	PESZ/235.10.1-002	6957625317713		179
2TAZ730000R4110	PESX/2.10.1-411	6957625316792		172	2TAZ730010R1310	PESX/235.10.1-131	6957625317623		177
2TAZ730000R4111	PESB/2.10.1-411	6957625316976		172	2TAZ730010R1311	PESB/235.10.1-131	6957625316907		177
2TAZ730000R4112	PESR/2.10.1-411	6957625317157		173	2TAZ730010R1312	PESR/235.10.1-131	6957625317089		178
2TAZ730000R4113	PESJ/2.10.1-411	6957625317331		173	2TAZ730010R1313	PESJ/235.10.1-131	6957625317263		178
2TAZ730000R4114	PESD/2.10.1-411	6957625317515		173	2TAZ730010R1314	PESD/235.10.1-131	6957625317447		177
2TAZ730000R4115	PESF/2.10.1-411	6957625317690		174	2TAZ730010R1315	PESF/235.10.1-131	6957625317621		178
2TAZ730000R4116	PESZ/2.10.1-411	6957625317874		174	2TAZ730010R1316	PESZ/235.10.1-131	6957625317805		179
2TAZ730001R0010	PESX/35.10.1-001	6957625316686		174	2TAZ730010R1510	PESX/235.10.1-151	6957625316754		177
2TAZ730001R0011	PESB/35.10.1-001	6957625316860		175	2TAZ730010R1511	PESB/235.10.1-151	6957625316938		177
2TAZ730001R0012	PESR/35.10.1-001	6957625317041		176	2TAZ730010R1512	PESR/235.10.1-151	6957625317119		178
2TAZ730001R0013	PESJ/35.10.1-001	6957625317225		175	2TAZ730010R1513	PESJ/235.10.1-151	6957625317294		178
2TAZ730001R0014	PESD/35.10.1-001	6957625317409		175	2TAZ730010R1514	PESD/235.10.1-151	6957625317478		177
2TAZ730001R0015	PESF/35.10.1-001	6957625317584		176	2TAZ730010R1515	PESF/235.10.1-151	6957625317652		178
2TAZ730001R0016	PESZ/35.10.1-001	6957625317768		176	2TAZ730010R1516	PESZ/235.10.1-151	6957625317836		179
2TAZ730001R0020	PESX/35.10.1-002	6957625316655		174	2TAZ730010R2010	PESX/235.10.1-201	6957625316693		177
2TAZ730001R0021	PESB/35.10.1-002	6957625316839		175	2TAZ730010R2011	PESB/235.10.1-201	6957625316877		177
2TAZ730001R0022	PESR/35.10.1-002	6957625317010		176	2TAZ730010R2012	PESR/235.10.1-201	6957625317058		178
2TAZ730001R0023	PESJ/35.10.1-002	6957625317195		175	2TAZ730010R2013	PESJ/235.10.1-201	6957625317232		178
2TAZ730001R0024	PESD/35.10.1-002	6957625317379		175	2TAZ730010R2014	PESD/235.10.1-201	6957625317416		177
2TAZ730001R0025	PESF/35.10.1-002	6957625317553		176	2TAZ730010R2015	PESF/235.10.1-201	6957625317591		178
2TAZ730001R0026	PESZ/35.10.1-002	6957625317737		176	2TAZ730010R2016	PESZ/235.10.1-201	6957625317775		179
2TAZ730001R1310	PESX/35.10.1-131	6957625316747		174	2TAZ730010R4110	PESX/235.10.1-411	6957625316785		177
2TAZ730001R1311	PESB/35.10.1-131	6957625316921		175	2TAZ730010R4111	PESB/235.10.1-411	6957625316969		177
2TAZ730001R1312	PESR/35.10.1-131	6957625317102		176	2TAZ730010R4112	PESR/235.10.1-411	6957625317140		178
2TAZ730001R1313	PESJ/35.10.1-131	6957625317287		175	2TAZ730010R4113	PESJ/235.10.1-411	6957625317324		178
2TAZ730001R1314	PESD/35.10.1-131	6957625317461		175	2TAZ730010R4114	PESD/235.10.1-411	6957625317508		177
2TAZ730001R1315	PESF/35.10.1-131	6957625317645		176	2TAZ730010R4115	PESF/235.10.1-411	6957625317683		178
2TAZ730001R1316	PESZ/35.10.1-131	6957625317829		176	2TAZ730010R4116	PESZ/235.10.1-411	6957625317867		179
2TAZ730001R1510	PESX/35.10.1-151	6957625316778		174	2TAZ730200R0010	PEB/U2.0.1-001	6957625315924		171
2TAZ730001R1511	PESB/35.10.1-151	6957625316952		175	2TAZ730200R0020	PEB/U2.0.1-002	6957625315917		171
2TAZ730001R1512	PESR/35.10.1-151	6957625317133		176	2TAZ730200R1310	PEB/U2.0.1-131	6957625315948		171
2TAZ730001R1513	PESJ/35.10.1-151	6957625317317		175	2TAZ730200R1510	PEB/U2.0.1-151	6957625315955		171
2TAZ730001R1514	PESD/35.10.1-151	6957625317492		175	2TAZ730200R2010	PEB/U2.0.1-201	6957625315931		171
2TAZ730001R1515	PESF/35.10.1-151	6957625317676		176	2TAZ730200R4110	PEB/U2.0.1-411	6957625315962		171
2TAZ730001R1516	PESZ/35.10.1-151	6957625317850		176	2TAZ730210R0010	PEBR/U2.0.1-001	6957625316105		168
2TAZ730001R2010	PESX/35.10.1-201	6957625316716		174	2TAZ730210R0020	PEBR/U2.0.1-002	6957625316099		168
2TAZ730001R2011	PESB/35.10.1-201	6957625316891		175	2TAZ730210R1310	PEBR/U2.0.1-131	6957625316129		168
2TAZ730001R2012	PESR/35.10.1-201	6957625317072		176	2TAZ730210R1510	PEBR/U2.0.1-151	6957625316136		168
2TAZ730001R2013	PESJ/35.10.1-201	6957625317256		175	2TAZ730210R2010	PEBR/U2.0.1-201	6957625316112		168
2TAZ730001R2014	PESD/35.10.1-201	6957625317430		175	2TAZ730210R4110	PEBR/U2.0.1-411	6957625316143		168
2TAZ730001R2015	PESF/35.10.1-201	6957625317614		176	2TAZ730300R0010	PEB/U3.0.1-001	6957625315986		171
2TAZ730001R2016	PESZ/35.10.1-201	6957625317799		176	2TAZ730300R0020	PEB/U3.0.1-002	6957625315979		171
2TAZ730001R4110	PESX/35.10.1-411	6957625316808		174	2TAZ730300R1310	PEB/U3.0.1-131	6957625316006		171
2TAZ730001R4111	PESB/35.10.1-411	6957625316983		175	2TAZ730300R1510	PEB/U3.0.1-151	6957625316013		171
2TAZ730001R4112	PESR/35.10.1-411	6957625317164		176	2TAZ730300R2010	PEB/U3.0.1-201	6957625315993		171
2TAZ730001R4113	PESJ/35.10.1-411	6957625317348		175	2TAZ730300R4110	PEB/U3.0.1-411	6957625316020		171
2TAZ730001R4114	PESD/35.10.1-411	6957625317522		175	2TAZ730310R0010	PEBR/U3.0.1-001	6957625316167		169
2TAZ730001R4115	PESF/35.10.1-411	6957625317706		176	2TAZ730310R0020	PEBR/U3.0.1-002	6957625316150		169
2TAZ730001R4116	PESZ/35.10.1-411	6957625317881		176	2TAZ730310R1310	PEBR/U3.0.1-131	6957625316181		169
2TAZ730010R0010	PESX/235.10.1-001	6957625316662		177	2TAZ730310R1510	PEBR/U3.0.1-151	6957625316198		169
2TAZ730010R0011	PESB/235.10.1-001	6957625316846		177	2TAZ730310R2010	PEBR/U3.0.1-201	6957625316174		169
2TAZ730010R0012	PESR/235.10.1-001	6957625317027		178	2TAZ730310R4110	PEBR/U3.0.1-411	6957625316204		169
2TAZ730010R0013	PESJ/235.10.1-001	6957625317201		178	2TAZ730500R0010	PEB/U5.0.1-001	6957625316044		172

Order code	Type	EAN	PG	Page	Order code	Type	EAN	PG	Page
2TAZ730500R0020	PEB/U5.0.1-002	6957625316037		172	2TYZ120002R0600	YUB/U2.0.1-001	6941593462391		181
2TAZ730500R1310	PEB/U5.0.1-131	6957625316068		172	2TYZ120002R0700	YUB/U2.0.1-SS	6925897542850		181
2TAZ730500R1510	PEB/U5.0.1-151	6957625316075		172	2TYZ120002R0800	YUB/U2.0.1-MB	6925897543062		181
2TAZ730500R2010	PEB/U5.0.1-201	6957625316051		172	2TYZ120002R0900	YUB/U2.0.1-AG	6925897542997		181
2TAZ730500R4110	PEB/U5.0.1-411	6957625316082		172	2TYZ120002R1000	YUB/U2.0.1-201	6925897542782		181
2TAZ730510R0010	PEBR/U5.0.1-001	6957625316228		170	2TYZ120003R0300	YUB/U3.0.1-131	6941593462469		182
2TAZ730510R0020	PEBR/U5.0.1-002	6957625316211		170	2TYZ120003R0500	YUB/U3.0.1-411	6941593462520		182
2TAZ730510R1310	PEBR/U5.0.1-131	6957625316242		170	2TYZ120003R0600	YUB/U3.0.1-001	6941593462407		182
2TAZ730510R1510	PEBR/U5.0.1-151	6957625316259		170	2TYZ120003R0700	YUB/U3.0.1-SS	6925897542867		182
2TAZ730510R2010	PEBR/U5.0.1-201	6957625316235		170	2TYZ120003R0800	YUB/U3.0.1-MB	6925897543079		182
2TAZ730510R4110	PEBR/U5.0.1-411	6957625316266		170	2TYZ120003R0900	YUB/U3.0.1-AG	6925897543000		182
2TAZ740010R0001	CAR/U 4.1.1.1-84	6941195435021		103	2TYZ120003R1000	YUB/U3.0.1-201	6925897542799		182
2TAZ740010R2001	CAR/U 4.1.1.1-71	6941195435038		103	2TYZ120004R0300	YUB/U4.0.1-131	6941593462476		182
2TAZ741010R0001	CAR/U 4.2.1.1-84	6941195435045		103	2TYZ120004R0500	YUB/U4.0.1-411	6941593462537		182
2TAZ741010R2001	CAR/U 4.2.1.1-71	6941195435052		103	2TYZ120004R0600	YUB/U4.0.1-001	6941593462414		182
2TMA130050B00054	H8237-4B	6955891815155	23	124	2TYZ120004R0700	YUB/U4.0.1-SS	6925897542874		182
2TMA130050B00055	H8237-5B	6955891815179	23	124	2TYZ120004R0800	YUB/U4.0.1-MB	6925897543086		182
2TMA130050B00065	H8236-4B	6955891816978	23	123	2TYZ120004R0900	YUB/U4.0.1-AG	6925897543017		182
2TMA130050B00067	H8236-5B	6955891816992	23	123	2TYZ120004R1000	YUB/U4.0.1-201	6925897542805		182
2TMA130050W00054	H8237-4W	6955891815148	23	124	2TYZ120101R0301	YUA/U1.0.1-131	6925897542751		184
2TMA130050W00055	H8237-5W	6955891815162	23	124	2TYZ120102R0300	YUBR/U0.0.1-131	6941593462483		183
2TMA130050W00065	H8236-4W	6955891816961	23	123	2TYZ120102R0500	YUBR/U0.0.1-411	6941593462544		183
2TMA130050W00067	H8236-5W	6955891816985	23	123	2TYZ120102R0600	YUBR/U0.0.1-001	6941593462421		183
2TMA130160B00089	42361S-B-03	6955891810426	22	124	2TYZ120102R0700	YUBR/U0.0.1-SS	6925897542881		183
2TMA130160B0132	42361F	6955891808973	22	125	2TYZ120102R0800	YUBR/U0.0.1-MB	6925897543093		183
2TMA130160W00021	42361S-W-03	6955891810419	22	124	2TYZ120102R0900	YUBR/U0.0.1-AG	6925897543024		183
2TMA130160W00029	53011PS-03	6955891809970	23	125	2TYZ120102R1000	YUBR/U0.0.1-201	6925897542812		183
2TMA130161B00001	42371S-B	6955891815278	23	125	2TYZ120104R0300	YUBR/U4.0.1-131	6941593462490		183
2TMA130161W00001	42371S-W	6955891815261	23	125	2TYZ120104R0500	YUBR/U4.0.1-411	6941593462551		183
2TMA200050B00005	RT/U 30.0.1-825	6955891816190	26	118	2TYZ120104R0600	YUBR/U4.0.1-001	6941593462438		183
2TMA200050W00007	RT/U 30.0.1-811	6955891816183	26	118	2TYZ120104R0700	YUBR/U4.0.1-SS	6925897542898		183
2TMA200160B00003	BOX/U 5.1	6955891816206	26	118	2TYZ120104R0800	YUBR/U4.0.1-MB	6925897543109		183
2TMA310011B00001	SD/U12.55.1-825	6955891820005	26	222	2TYZ120104R0900	YUBR/U4.0.1-AG	6925897543031		183
2TMA310011B00001	SD/U12.55.1-825	6955891820005	26	241	2TYZ120104R1000	YUBR/U4.0.1-201	6925897542829		183
2TMA310011B00002	SD/U12.63.1-825	6955891820012	26	227	2TYZ510000G0601	PMA/K1.1-884	6925897543871		75
2TMA310011B00003	RT/U12.86.1-825	6955891820029		117	2TYZ510000G0602	PMA/A1.1-884	6925897543888		75
2TMA310011B00004	SD/U12.70.1-4015	6955891820043	26	235	2TYZ510000G0603	PMA/K2.1-884	6925897543864		74
2TMA310011W00001	RT/U12.86.1-811	6955891820036		117	2TYZ510000G0701	PMA/K1.1-885	6925897543963		75
2TMA310051B00001	ST/U10.1.1-825	6955891819443	26	122	2TYZ510000G0702	PMA/A1.1-885	6925897543970		75
2TMA310051B00002	ST/U10.2.1-825	6955891819467	26	122	2TYZ510000G0703	PMA/K2.1-885	6925897543956		74
2TMA310051B00003	ST/U10.3.1-825	6955891819481	26	122	2TYZ510202G0601	PMH/U2.1.1-884	6925897543833		74
2TMA310051B00004	ST/U10.4.1-825	6955891819504	26	122	2TYZ510202G0701	PMH/U2.1.1-885	6925897543925		74
2TMA310051W00001	ST/U10.1.1-811	6955891819436	26	122	2TYZ510205G0601	BMH/U2.1.1-884	6925897543802		73
2TMA310051W00002	ST/U10.2.1-811	6955891819450	26	122	2TYZ510205G0701	BMH/U2.1.1-885	6925897543895		73
2TMA310051W00003	ST/U10.3.1-811	6955891819474	26	122	2TYZ510212G0601	PMH/U4.5.1-884	6925897543840		74
2TMA310051W00004	ST/U10.4.1-811	6955891819498	26	122	2TYZ510212G0701	PMH/U4.5.1-885	6925897543932		74
2TMA310161B00001	ST/A10.1-825	6955891819528	26	123	2TYZ510215G0601	BMH/U4.5.1-884	6925897543826		73
2TMA310161W00001	ST/A10.1-811	6955891819511	26	123	2TYZ510215G0701	BMH/U4.5.1-885	6925897543918		73
2TYZ120001R0300	YUB/U1.0.1-131	6941593462445		181	2TYZ510505G0601	BMH/U2.55.1-884	6925897543819		73
2TYZ120001R0500	YUB/U1.0.1-411	6941593462506		181	2TYZ510505G0701	BMH/U2.55.1-885	6925897543901		73
2TYZ120001R0501	YUA/U1.0.1-411	6925897542768		184	7TCA085400R0448	SPD/S 1.1	5415022475500		19
2TYZ120001R0600	YUB/U1.0.1-001	6941593462384		181	GHQ3050018R0001	SSF/GB	4016779534673	50	142
2TYZ120001R0601	YUA/U1.0.1-001	6925897542744		184	GHQ3201972R0001	MRS/W	4016779506601	50	140
2TYZ120001R0700	YUB/U1.0.1-SS	6925897542843		181	GHQ3201972R0011	VMRS/W	4016779506588	50	140
2TYZ120001R0701	YUA/U1.0.1-SS	6925897542904		184	GHQ4030001R0004	SWM 4	4013232057403	50	141
2TYZ120001R0800	YUB/U1.0.1-MB	6925897543055		181	GHQ4030001R0012	SWM4/RN	4013232057502	50	141
2TYZ120001R0801	YUA/U1.0.1-MB	6925897543116		184	GHQ6050053R0001	LL/S 1.1	4016779392105	20	17
2TYZ120001R0900	YUB/U1.0.1-AG	6925897542980		181	GHQ6301901R0001	BUSKLEMME	4012233802302	20	20
2TYZ120001R0901	YUA/U1.0.1-AG	6925897543048		184	GHQ6301902R0001	KLEMME	4016779079303	20	20
2TYZ120001R1000	YUB/U1.0.1-201	6925897542775		181	GHQ6301908R0001	VB/K 200.1	4016779469807	20	19
2TYZ120001R1001	YUA/U1.0.1-201	6925897542836		184	GHQ6301908R0002	VB/K 270.1	4016779469906	20	19
2TYZ120002R0300	YUB/U2.0.1-131	6941593462452		181	GHQ6301908R0003	VB/K 100.1	4016779501033	20	19
2TYZ120002R0500	YUB/U2.0.1-411	6941593462513		181	GHQ6301908R0004	VB/K 360.1	4016779846769	20	19

[> Table of contents](#)

Selection Table According to Type

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
1721-181K	2CKA001754A4240	4011395050804	04	257	1722-291-500	2CKA001754A4472	4011395165195	04	260
1721-182K-500	2CKA001754A4506	4011395174609	01	257	1722-299-500	2CKA001754A4482	4011395165287	04	260
1721-183K-500	2CKA001754A4529	4011395175941	04	257	1722-4013	2CKA001754A4883	4011395343814		264
1721-184K-500	2CKA001754A4498	4011395174524	01	257	1722-4028	2CLA897200A3958	8427238272351		264
1721-270	2CKA001754A4683	4011395258682	04	260	1722-4073	2CLA897200A1758	8427238272337		264
1721-275	2CKA001754A4703	4011395259115	04	260	1722-4083	2CKA001754A4888	4011395343616		264
1721-276	2CKA001754A4693	4011395261132	04	260	1722-4086	2CKA001754A4893	4011395343418		264
1721-280	2CKA001754A4437	4011395156957	04	260	1722-4097	2CLA897200A2958	8427238272344		264
1721-281	2CKA001754A4409	4011395126363	04	260	1722-441M-500	2CKA001754A4911	4011395342817		265
1721-284	2CKA001754A4331	4011395113240	01	260	1722-44G-500	2CKA001754A4849	4011395321089		264
1721-285	2CKA001754A4334	4011395113271	04	260	1722-44M-500	2CKA001754A4850	4011395321096		264
1721-286	2CKA001754A4337	4011395113318	04	260	1722-453M-500	2CKA001754A4912	4011395342824		265
1721-287	2CKA001754A4340	4011395113349	04	260	1722-456M-500	2CKA001754A4913	4011395342831		265
1721-288	2CKA001754A4343	4011395113370	04	260	1722-45M-500	2CKA001754A4852	4011395321119		264
1721-291-500	2CKA001754A4471	4011395165072	04	260	1722-80-500	2CKA001754A4537	4011395176139	04	258
1721-4013	2CKA001754A4882	4011395343852		264	1722-80G	2CKA001754A4327	4011395113066	04	258
1721-4028	2CLA897100A3958	8427238272313		264	1722-811	2CKA001754A4443	4011395157022	04	259
1721-4073	2CLA897100A1758	8427238272290		264	1722-821	2CKA001754A4259	4011395056899	04	259
1721-4083	2CKA001754A4887	4011395343654		264	1722-823-101	2CKA001754A4357	4011395115237	04	259
1721-4086	2CKA001754A4892	4011395343456		264	1722-825	2CKA001754A4323	4011395088920	04	259
1721-4097	2CLA897100A2958	8427238272306		264	1722-825	2CKA001754A4323	4011395088920	04	259
1721-441M-500	2CKA001754A4905	4011395342756		265	1722-826-101	2CKA001754A4361	4011395115275	04	259
1721-44G-500	2CKA001754A4841	4011395321003		264	1722-831-500	2CKA001754A4606	4011395195345	04	262
1721-44M-500	2CKA001754A4842	4011395321010		264	1722-832-500	2CKA001754A4601	4011395195284	04	262
1721-453M-500	2CKA001754A4906	4011395342763		265	1722-833-500	2CKA001754A4576	4011395194966	04	262
1721-456M-500	2CKA001754A4907	4011395342770		265	1722-835-500	2CKA001754A4566	4011395194850	04	262
1721-45M-500	2CKA001754A4844	4011395321034		264	1722-836-500	2CKA001754A4571	4011395194911	04	262
1721-80-500	2CKA001754A4535	4011395176115	04	258	1722-838-500	2CKA001754A4561	4011395194799	04	262
1721-80G-500	2CKA001754A4538	4011395176153	04	258	1722-843-500	2CKA001754A4596	4011395195239	04	262
1721-811	2CKA001754A4442	4011395157015	04	259	1722-84-500	2CKA001754A4539	4011395176160	01	258
1721-821	2CKA001754A4258	4011395056875	04	259	1722-845-500	2CKA001754A4586	4011395195123	04	262
1721-823-101	2CKA001754A4356	4011395115220	04	259	1722-846-500	2CKA001754A4591	4011395195178	04	262
1721-825	2CKA001754A4322	4011395088913	04	259	1722-848-500	2CKA001754A4581	4011395195024	04	262
1721-826-101	2CKA001754A4360	4011395115268	04	259	1722-860	2CKA001754A4255	4011395056813	04	259
1721-831-500	2CKA001754A4605	4011395195338	04	262	1722-866K-500	2CKA001754A4501	4011395174555	04	259
1721-832-500	2CKA001754A4600	4011395195277	04	262	1722-884K	2CKA001754A4415	4011395128251	01	257
1721-833-500	2CKA001754A4575	4011395194959	04	262	1722-885K-500	2CKA001754A4534	4011395176009	04	257
1721-835-500	2CKA001754A4565	4011395194843	04	262	1723-181K	2CKA001754A4242	4011395050828	04	257
1721-836-500	2CKA001754A4570	4011395194898	04	262	1723-182K	2CKA001754A4232	4011395050712	01	257
1721-838-500	2CKA001754A4560	4011395194782	04	262	1723-183K-500	2CKA001754A4533	4011395175996	04	257
1721-843-500	2CKA001754A4595	4011395195222	04	262	1723-184K-500	2CKA001754A4502	4011395174562	01	257
1721-84-500	2CKA001754A4536	4011395176122	01	258	1723-270	2CKA001754A4685	4011395261125	04	260
1721-845-500	2CKA001754A4585	4011395195062	04	262	1723-275	2CKA001754A4705	4011395259139	04	260
1721-846-500	2CKA001754A4590	4011395195161	04	262	1723-276	2CKA001754A4695	4011395259023	04	260
1721-848-500	2CKA001754A4580	4011395195017	04	262	1723-280	2CKA001754A4439	4011395156971	04	260
1721-860	2CKA001754A4254	4011395056790	04	259	1723-281	2CKA001754A4411	4011395126387	04	260
1721-866K-500	2CKA001754A4500	4011395174548	04	259	1723-284	2CKA001754A4333	4011395113264	04	260
1721-884K-500	2CKA001754A4531	4011395175965	01	257	1723-285	2CKA001754A4336	4011395113295	04	260
1721-885K-500	2CKA001754A4532	4011395175972	04	257	1723-286	2CKA001754A4339	4011395113332	04	260
1722-181K	2CKA001754A4241	4011395050811	04	257	1723-287	2CKA001754A4342	4011395113363	04	260
1722-182K	2CKA001754A4231	4011395050705	01	257	1723-288	2CKA001754A4345	4011395113394	04	260
1722-183K-500	2CKA001754A4530	4011395175958	04	257	1723-291-500	2CKA001754A4473	4011395165317	04	260
1722-184K-500	2CKA001754A4499	4011395174531	01	257	1723-299-500	2CKA001754A4483	4011395165393	04	260
1722-270	2CKA001754A4684	4011395258699	04	260	1723-4013	2CKA001754A4884	4011395343777		264
1722-275	2CKA001754A4704	4011395259122	04	260	1723-4028	2CLA897300A3958	8427238272399		264
1722-276	2CKA001754A4694	4011395259016	04	260	1723-4073	2CLA897300A1758	8427238272375		264
1722-280	2CKA001754A4438	4011395156964	04	260	1723-4083	2CKA001754A4889	4011395343579		264
1722-281	2CKA001754A4410	4011395126370	04	260	1723-4086	2CKA001754A4894	4011395343371		264
1722-284	2CKA001754A4332	4011395113257	04	260	1723-4097	2CLA897300A2958	8427238272382		264
1722-285	2CKA001754A4335	4011395113288	04	260	1723-441M-500	2CKA001754A4917	4011395342879		265
1722-286	2CKA001754A4338	4011395113325	04	260	1723-44G-500	2CKA001754A4857	4011395321164		264
1722-287	2CKA001754A4341	4011395113356	04	260	1723-44M-500	2CKA001754A4858	4011395321171		264
1722-288	2CKA001754A4344	4011395113387	04	260	1723-453M-500	2CKA001754A4918	4011395342886		265

Selection Table According to Type

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
1723-456M-500	2CKA001754A4919	4011395342893		265	1724-838-500	2CKA001754A4563	4011395194829	04	263
1723-45M-500	2CKA001754A4860	4011395321195		264	1724-84	2CKA001754A4112	4011395996171	04	258
1723-80-500	2CKA001754A4540	4011395176177	04	258	1724-843-500	2CKA001754A4598	4011395195253	04	263
1723-80G	2CKA001754A4328	4011395113073	04	258	1724-845-500	2CKA001754A4588	4011395195147	04	263
1723-811	2CKA001754A4444	4011395157039	04	259	1724-846-500	2CKA001754A4593	4011395195192	04	263
1723-821	2CKA001754A4260	4011395056912	04	259	1724-848-500	2CKA001754A4583	4011395195048	04	263
1723-823-101	2CKA001754A4358	4011395115244	04	259	1724-860	2CKA001754A4257	4011395056851	04	259
1723-826-101	2CKA001754A4362	4011395115282	04	259	1724-866K	2CKA001754A4320	4011395088395	04	259
1723-831-500	2CKA001754A4607	4011395195352	04	262	1724-884K	2CKA001754A4417	4011395128275	01	257
1723-832-500	2CKA001754A4602	4011395195291	04	262	1724-885K	2CKA001754A4422	4011395128336	04	257
1723-833-500	2CKA001754A4577	4011395194973	04	262	1725-181K	2CKA001754A4244	4011395050842	04	257
1723-835-500	2CKA001754A4567	4011395194867	04	262	1725-182K	2CKA001754A4234	4011395050743	01	257
1723-836-500	2CKA001754A4572	4011395194928	04	262	1725-183K	2CKA001754A4310	4011395074848	04	257
1723-838-500	2CKA001754A4562	4011395194812	04	262	1725-184K-500	2CKA001754A4517	4011395174722	01	257
1723-843-500	2CKA001754A4597	4011395195246	04	262	1725-270	2CKA001754A4687	4011395258729	04	261
1723-84-500	2CKA001754A4541	4011395176238	01	258	1725-275	2CKA001754A4707	4011395259153	04	261
1723-845-500	2CKA001754A4587	4011395195130	04	262	1725-276	2CKA001754A4697	4011395259054	04	261
1723-846-500	2CKA001754A4592	4011395195185	04	262	1725-280	2CKA001754A4441	4011395156995	04	261
1723-848-500	2CKA001754A4582	4011395195031	04	262	1725-281	2CKA001754A4413	4011395126615	04	261
1723-860	2CKA001754A4256	4011395056837	04	259	1725-284	2CKA001754A4347	4011395113424	01	261
1723-866K	2CKA001754A4319	4011395088371	04	259	1725-285	2CKA001754A4349	4011395113448	04	261
1723-884K	2CKA001754A4416	4011395128268	01	257	1725-286	2CKA001754A4351	4011395113462	04	261
1723-885K	2CKA001754A4421	4011395128329	04	257	1725-287	2CKA001754A4353	4011395113486	04	261
1724-181K	2CKA001754A4243	4011395050835	04	257	1725-288	2CKA001754A4355	4011395113516	04	261
1724-182K	2CKA001754A4233	4011395050736	01	257	1725-291-500	2CKA001754A4475	4011395165539	04	261
1724-183K	2CKA001754A4309	4011395074831	04	257	1725-299-500	2CKA001754A4485	4011395165621	04	261
1724-184K	2CKA001754A4238	4011395050781	01	257	1725-4013	2CKA001754A4886	4011395343692		264
1724-270	2CKA001754A4686	4011395258712	04	261	1725-4028	2CLA897500A3958	8427238272467		264
1724-275	2CKA001754A4706	4011395259146	04	261	1725-4073	2CLA897500A1758	8427238272443		264
1724-276	2CKA001754A4696	4011395259047	04	261	1725-4083	2CKA001754A4891	4011395343494		264
1724-280	2CKA001754A4440	4011395156988	04	261	1725-4086	2CKA001754A4896	4011395343296		264
1724-281	2CKA001754A4412	4011395126394	04	261	1725-4097	2CLA897500A2958	8427238272450		264
1724-284	2CKA001754A4346	4011395113417	01	261	1725-441M-500	2CKA001754A4929	4011395342992		265
1724-285	2CKA001754A4348	4011395113431	04	261	1725-44G-500	2CKA001754A4873	4011395321324		264
1724-286	2CKA001754A4350	4011395113455	04	261	1725-44M-500	2CKA001754A4874	4011395321331		264
1724-287	2CKA001754A4352	4011395113479	04	261	1725-453M-500	2CKA001754A4930	4011395343005		265
1724-288	2CKA001754A4354	4011395113493	04	261	1725-456M-500	2CKA001754A4931	4011395343012		265
1724-291-500	2CKA001754A4474	4011395165423	04	261	1725-45M-500	2CKA001754A4876	4011395321355		264
1724-299-500	2CKA001754A4484	4011395165515	04	261	1725-80	2CKA001754A4108	4011395994924	04	258
1724-4013	2CKA001754A4885	4011395343739		264	1725-80G	2CKA001754A4330	4011395113097	04	258
1724-4028	2CLA897400A3958	8427238272436		264	1725-831-500	2CKA001754A4609	4011395195376	04	263
1724-4073	2CLA897400A1758	8427238272412		264	1725-832-500	2CKA001754A4604	4011395195321	04	263
1724-4083	2CKA001754A4890	4011395343531		264	1725-833-500	2CKA001754A4579	4011395194997	04	263
1724-4086	2CKA001754A4895	4011395343333		264	1725-835-500	2CKA001754A4569	4011395194881	04	263
1724-4097	2CLA897400A2958	8427238272429		264	1725-836-500	2CKA001754A4574	4011395194942	04	263
1724-441M-500	2CKA001754A4923	4011395342930		265	1725-838-500	2CKA001754A4564	4011395194836	04	263
1724-44G-500	2CKA001754A4865	4011395321249		264	1725-84	2CKA001754A4113	4011395996195	04	258
1724-44M-500	2CKA001754A4866	4011395321256		264	1725-843-500	2CKA001754A4599	4011395195260	04	263
1724-453M-500	2CKA001754A4924	4011395342947		265	1725-845-500	2CKA001754A4589	4011395195154	04	263
1724-456M-500	2CKA001754A4925	4011395342954		265	1725-846-500	2CKA001754A4594	4011395195215	04	263
1724-45M-500	2CKA001754A4868	4011395321270		264	1725-848-500	2CKA001754A4584	4011395195055	04	263
1724-80	2CKA001754A4107	4011395994887	04	258	1725-866K	2CKA001754A4321	4011395088425	04	259
1724-80G	2CKA001754A4329	4011395113080	04	258	1725-884K	2CKA001754A4418	4011395128282	01	257
1724-811	2CKA001754A4445	4011395157046	04	259	1725-885K	2CKA001754A4423	4011395128343	04	257
1724-821	2CKA001754A4261	4011395056936	04	259	2114-212	2CKA006599A1193	4011395378700	19	279
1724-823-101	2CKA001754A4359	4011395115251	04	259	2114-214-500	2CKA006599A3008	4011395175170	19	280
1724-825	2CKA001754A4325	4011395088944	04	259	2CSKK1002C	2CSK206571R1002	8012542065715		308
1724-826-101	2CKA001754A4363	4011395115299	04	259	2CSKK1003C	2CSK232195R1003	8012542321958		308
1724-831-500	2CKA001754A4608	4011395195369	04	263	2CSKK1202C	2CSK232205R1202	8012542322054		308
1724-832-500	2CKA001754A4603	4011395195314	04	263	2CSKK1504C	2CSK232155R1504	8012542321552		308
1724-833-500	2CKA001754A4578	4011395194980	04	263	42361F	2TMA130160B0132	6955891808973	22	125
1724-835-500	2CKA001754A4568	4011395194874	04	263	42361S-B-03	2TMA130160B0089	6955891810426	22	124
1724-836-500	2CKA001754A4573	4011395194935	04	263	42361S-W-03	2TMA130160W0021	6955891810419	22	124

Type	Oder code	EAN	PG	Page
42371S-B	2TMA130161B0001	6955891815278	23	125
42371S-W	2TMA130161W0001	6955891815261	23	125
53011PS-03	2TMA130160W0029	6955891809970	23	125
6108/06-500	2CKA006133A0221	4011395210925	26	267
6108/06-AP-500	2CKA006133A0225	4011395210963	26	267
6108/07-500	2CKA006133A0223	4011395210949	26	272
6108/07-AP-500	2CKA006133A0227	4011395210987	26	267
6108/18-500	2CKA006134A0319	4011395211014	26	281
6108/60-500	2CKA006115A0454	4011395210147	26	277
6108/61-20-500	2CKA006115A0476	4011395209943	26	277
6108/61-212-500	2CKA006115A0474	4011395209929	26	277
6108/61-214-500	2CKA006115A0475	4011395209936	26	277
6108/61-21-500	2CKA006115A0477	4011395209950	26	277
6108/61-22G-500	2CKA006115A0478	4011395209967	26	277
6108/61-24G-500	2CKA006115A0480	4011395209981	26	277
6108/61-260-500	2CKA006115A0481	4011395209998	26	277
6108/61-266-500	2CKA006115A0482	4011395210017	26	277
6108/61-81-500	2CKA006115A0483	4011395210024	26	277
6108/61-82-500	2CKA006115A0484	4011395210031	26	277
6108/61-83-500	2CKA006115A0485	4011395210048	26	277
6108/61-840-500	2CKA006155A0121	4011395220870	26	277
6108/61-84-500	2CKA006115A0486	4011395210055	26	277
6108/61-866-500	2CKA006115A0492	4011395210123	26	277
6108/61-884-500	2CKA006115A0487	4011395210062	26	277
6108/61-885-500	2CKA006115A0488	4011395210079	26	277
6108/61-914	2CKA006155A0115	4011395220818	26	277
6109/03-212-500	2CKA006155A0051	4011395209035	26	283
6109/03-214-500	2CKA006155A0052	4011395209042	26	283
6109/03-81-500	2CKA006155A0060	4011395209219	26	283
6109/03-81-500	2CKA006155A0060	4011395209219	26	283
6109/03-81-500	2CKA006155A0060	4011395209219	26	283
6109/03-82-500	2CKA006155A0061	4011395209226	26	283
6109/03-82-500	2CKA006155A0061	4011395209226	26	283
6109/03-82-500	2CKA006155A0061	4011395209226	26	283
6109/03-82-500	2CKA006155A0061	4011395209226	26	283
6109/03-82-500	2CKA006155A0061	4011395209226	26	283
6109/03-83-500	2CKA006155A0062	4011395209233	26	283
6109/03-840-500	2CKA006155A0114	4011395220795	26	283
6109/03-84-500	2CKA006155A0063	4011395209240	26	283
6109/03-84-500	2CKA006155A0063	4011395209240	26	283
6109/03-84-500	2CKA006155A0063	4011395209240	26	283
6109/03-84-500	2CKA006155A0063	4011395209240	26	283
6109/03-84-500	2CKA006155A0063	4011395209240	26	283
6109/03-866-500	2CKA006155A0069	4011395209318	26	283
6109/03-884-500	2CKA006155A0064	4011395209257	26	283
6109/03-885-500	2CKA006155A0065	4011395209264	26	283
6109/05-500	2CKA006181A0013	4011395208731	26	278
6109/08-500	2CKA006134A0313	4011395208755	26	278
6109/18-500	2CKA006134A0315	4011395208779	26	282
6109/28-500	2CKA006134A0317	4011395208793	26	282
6120/12-101-500	2CKA006120A0075	4011395135488	26	202
6120/12-101-508	2CKA006120A0076	4011395147337	26	202
6120/13-500	2CKA006120A0072	4011395102275	26	202
6120/13-508	2CKA006120A0073	4011395116586	26	202
6122/10-212-500	2CKA006132A0373	4011395211236	26	255
6122/10-214-500	2CKA006132A0374	4011395211243	26	255
6122/10-81-500	2CKA006132A0376	4011395211267	26	255
6122/10-81-500	2CKA006132A0376	4011395211267	26	255
6122/10-81-500	2CKA006132A0376	4011395211267	26	255
6122/10-82-500	2CKA006132A0377	4011395211274	26	255
6122/10-82-500	2CKA006132A0377	4011395211274	26	255
6122/10-82-500	2CKA006132A0377	4011395211274	26	255
6122/10-82-500	2CKA006132A0377	4011395211274	26	255
6122/10-82-500	2CKA006132A0377	4011395211274	26	255
6122/10-83-500	2CKA006132A0378	4011395211281	26	255
6122/10-840-500	2CKA006132A0407	4011395218631	26	255

Type	Oder code	EAN	PG	Page
6122/10-84-500	2CKA006132A0379	4011395211298	26	255
6122/10-84-500	2CKA006132A0379	4011395211298	26	255
6122/10-84-500	2CKA006132A0379	4011395211298	26	255
6122/10-84-500	2CKA006132A0379	4011395211298	26	255
6122/10-866-500	2CKA006132A0385	4011395211366	26	255
6122/10-884-500	2CKA006132A0380	4011395211311	26	255
6122/10-885-500	2CKA006132A0381	4011395211328	26	255
6123/20-500	2CKA006123A0001	4011395157978	26	287
6123/20-500	2CKA006123A0001	4011395157978	26	295
6123/21-500	2CKA006123A0002	4011395157985	26	287
6123/21-500	2CKA006123A0002	4011395157985	26	295
6123/22-500	2CKA006123A0003	4011395157992	26	287
6123/22-500	2CKA006123A0003	4011395157992	26	295
6123/23-500	2CKA006123A0004	4011395158012	26	287
6123/23-500	2CKA006123A0004	4011395158012	26	295
6123/24-500	2CKA006123A0005	4011395176450	26	287
6123/24-500	2CKA006123A0005	4011395176450	26	295
6123/26-500	2CKA006123A0006	4011395176467	26	287
6123/26-500	2CKA006123A0006	4011395176467	26	295
6124/08-981-500	2CKA006134A0309	4011395189122	26	287
6124/88-509	2CKA006134A0310	4011395189139	26	294
6125/01-81-500	2CKA006115A0205	4011395139479	26	247
6125/01-81-500	2CKA006115A0205	4011395139479	26	247
6125/01-82-500	2CKA006115A0206	4011395139486	26	247
6125/01-82-500	2CKA006115A0206	4011395139486	26	247
6125/01-82-500	2CKA006115A0206	4011395139486	26	247
6125/01-83-500	2CKA006115A0207	4011395139493	26	247
6125/01-84-500	2CKA006115A0183	4011395135594	26	247
6125/01-84-500	2CKA006115A0183	4011395135594	26	247
6125/01-84-500	2CKA006115A0183	4011395135594	26	247
6125/01-84-500	2CKA006115A0183	4011395135594	26	247
6125/01-866-500	2CKA006115A0211	4011395139530	26	247
6125/01-884-500	2CKA006115A0214	4011395139561	26	247
6125/01-885-500	2CKA006115A0215	4011395139578	26	247
6125/02-81-500	2CKA006115A0216	4011395139585	26	250
6125/02-81-500	2CKA006115A0216	4011395139585	26	250
6125/02-81-500	2CKA006115A0216	4011395139585	26	250
6125/02-82-500	2CKA006115A0217	4011395139592	26	250
6125/02-82-500	2CKA006115A0217	4011395139592	26	250
6125/02-82-500	2CKA006115A0217	4011395139592	26	250
6125/02-83-500	2CKA006115A0218	4011395139615	26	250
6125/02-840-500	2CKA006115A0452	4011395195536	26	250
6125/02-84-500	2CKA006115A0219	4011395139622	26	250
6125/02-84-500	2CKA006115A0219	4011395139622	26	250
6125/02-84-500	2CKA006115A0219	4011395139622	26	250
6125/02-866-500	2CKA006115A0223	4011395139660	26	250
6125/02-884-500	2CKA006115A0226	4011395139691	26	250
6125/02-885-500	2CKA006115A0227	4011395139714	26	250
6125/20-981-500	2CKA006115A0443	4011395157817	26	286
6125/98-509	2CKA006115A0444	4011395157824	26	292
6126/01-81-500	2CKA006116A0195	4011395139851	26	247
6126/01-81-500	2CKA006116A0195	4011395139851	26	247
6126/01-82-500	2CKA006116A0196	4011395139868	26	247
6126/01-82-500	2CKA006116A0196	4011395139868	26	247
6126/01-82-500	2CKA006116A0196	4011395139868	26	247
6126/01-83-500	2CKA006116A0197	4011395139875	26	247
6126/01-84-500	2CKA006116A0174	4011395135747	26	247
6126/01-84-500	2CKA006116A0174	4011395135747	26	247
6126/01-84-500	2CKA006116A0174	4011395135747	26	247
6126/01-84-500	2CKA006116A0174	4011395135747	26	247
6126/01-866-500	2CKA006116A0201	4011395139936	26	247

Selection Table According to Type

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
6126/01-884-500	2CKA006116A0204	4011395139967	26	247	6128/28-884-500	2CKA006134A0338	4011395213889	26	256
6126/01-885-500	2CKA006116A0205	4011395139974	26	247	6128/28-885-500	2CKA006134A0339	4011395213896	26	256
6126/02-81-500	2CKA006116A0206	4011395139981	26	250	6129/01-81-500	2CKA006135A0156	4011395140949	26	251
6126/02-81-500	2CKA006116A0206	4011395139981	26	250	6129/01-81-500	2CKA006135A0156	4011395140949	26	251
6126/02-81-500	2CKA006116A0206	4011395139981	26	250	6129/01-82-500	2CKA006135A0157	4011395140956	26	251
6126/02-82-500	2CKA006116A0207	4011395139998	26	250	6129/01-82-500	2CKA006135A0157	4011395140956	26	251
6126/02-82-500	2CKA006116A0207	4011395139998	26	250	6129/01-82-500	2CKA006135A0157	4011395140956	26	251
6126/02-82-500	2CKA006116A0207	4011395139998	26	250	6129/01-83-500	2CKA006135A0158	4011395140963	26	251
6126/02-82-500	2CKA006116A0207	4011395139998	26	250	6129/01-84-500	2CKA006135A0146	4011395136164	26	251
6126/02-83-500	2CKA006116A0208	4011395140017	26	250	6129/01-84-500	2CKA006135A0146	4011395136164	26	251
6126/02-840-500	2CKA006116A0227	4011395195543	26	250	6129/01-84-500	2CKA006135A0146	4011395136164	26	251
6126/02-84-500	2CKA006116A0209	4011395140024	26	250	6129/01-84-500	2CKA006135A0146	4011395136164	26	251
6126/02-84-500	2CKA006116A0209	4011395140024	26	250	6129/01-866-500	2CKA006135A0162	4011395141007	26	251
6126/02-84-500	2CKA006116A0209	4011395140024	26	250	6129/01-884-500	2CKA006135A0165	4011395141038	26	251
6126/02-84-500	2CKA006116A0209	4011395140024	26	250	6129/01-885-500	2CKA006135A0166	4011395141045	26	251
6126/02-866-500	2CKA006116A0213	4011395140062	26	250	6129/20-981-500	2CKA006118A0104	4011395157879	26	286
6126/02-884-500	2CKA006116A0216	4011395140093	26	250	6129/21-981-500	2CKA006118A0107	4011395157916	26	286
6126/02-885-500	2CKA006116A0217	4011395140116	26	250	6129/96-509	2CKA006118A0105	4011395157886		293
6126/20-981-500	2CKA006116A0218	4011395157848	26	286	6129/98-509	2CKA006118A0108	4011395157923	26	293
6126/98-509	2CKA006116A0219	4011395157855	26	292	6131/20-183-500	2CKA006132A0343	4011395185896	26	80
6127/01-81-500	2CKA006117A0221	4011395140246	26	247	6131/20-24-500	2CKA006132A0342	4011395185889	26	80
6127/01-81-500	2CKA006117A0221	4011395140246	26	247	6131/20-885-500	2CKA006132A0436	4011395352465	26	80
6127/01-82-500	2CKA006117A0222	4011395140253	26	247	6131/21-183-500	2CKA006132A0345	4011395185919	26	81
6127/01-82-500	2CKA006117A0222	4011395140253	26	247	6131/21-24-500	2CKA006132A0344	4011395185902	26	81
6127/01-82-500	2CKA006117A0222	4011395140253	26	247	6131/21-885-500	2CKA006132A0438	4011395348321	26	81
6127/01-83-500	2CKA006117A0223	4011395140260	26	247	6131/29-183-500	2CKA006132A0352	4011395185995	26	87
6127/01-84-500	2CKA006117A0200	4011395135884	26	247	6131/29-24-500	2CKA006132A0351	4011395185988	26	87
6127/01-84-500	2CKA006117A0200	4011395135884	26	247	6131/29-885-500	2CKA006132A0454	4011395348482	26	87
6127/01-84-500	2CKA006117A0200	4011395135884	26	247	6131/30-183-500	2CKA006132A0347	4011395185933	26	82
6127/01-84-500	2CKA006117A0200	4011395135884	26	247	6131/30-24-500	2CKA006132A0346	4011395185926	26	82
6127/01-866-500	2CKA006117A0227	4011395140307	26	247	6131/30-885-500	2CKA006132A0440	4011395348345	26	82
6127/01-884-500	2CKA006117A0230	4011395140338	26	247	6131/31-183-500	2CKA006132A0349	4011395185964	26	83
6127/01-885-500	2CKA006117A0231	4011395140345	26	247	6131/31-24-500	2CKA006132A0348	4011395185940	26	83
6127/02-81-500	2CKA006117A0232	4011395140352	26	250	6131/31-885-500	2CKA006132A0443	4011395348376	26	83
6127/02-81-500	2CKA006117A0232	4011395140352	26	250	6131/38-183-500	2CKA006132A0404	4011395216583	26	87
6127/02-81-500	2CKA006117A0232	4011395140352	26	250	6131/38-24-500	2CKA006132A0403	4011395216552	26	87
6127/02-82-500	2CKA006117A0233	4011395140369	26	250	6131/38-885-500	2CKA006132A0459	4011395348536	26	87
6127/02-82-500	2CKA006117A0233	4011395140369	26	250	6131/39-183-500	2CKA006132A0354	4011395186015	26	87
6127/02-82-500	2CKA006117A0233	4011395140369	26	250	6131/39-24-500	2CKA006132A0353	4011395186008	26	87
6127/02-82-500	2CKA006117A0233	4011395140369	26	250	6131/39-885-500	2CKA006132A0455	4011395348499	26	87
6127/02-83-500	2CKA006117A0234	4011395140376	26	250	6131/40-24-500	2CKA006132A0350	4011395185971	26	84
6127/02-840-500	2CKA006117A0252	4011395195567	26	250	6131/40-885-500	2CKA006132A0446	4011395352472	26	84
6127/02-84-500	2CKA006117A0235	4011395140383	26	250	6131/50-183-500	2CKA006132A0400	4011395216453	26	85
6127/02-84-500	2CKA006117A0235	4011395140383	26	250	6131/50-24-500	2CKA006132A0399	4011395216446	26	85
6127/02-84-500	2CKA006117A0235	4011395140383	26	250	6131/50-885-500	2CKA006132A0449	4011395348437	26	85
6127/02-84-500	2CKA006117A0235	4011395140383	26	250	6131/51-183-500	2CKA006132A0414	4011395222317	26	86
6127/02-866-500	2CKA006117A0239	4011395140437	26	250	6131/51-24-500	2CKA006132A0413	4011395222294	26	86
6127/02-884-500	2CKA006117A0242	4011395140468	26	250	6131/51-885-500	2CKA006132A0452	4011395348468	26	86
6127/02-885-500	2CKA006117A0243	4011395140475	26	250	6136/07 UP-500	2CKA006136A0212	4011395223529	26	122
6128/28-81-500	2CKA006134A0331	4011395213810	26	256	6138/11-83-500	2CKA006138A0005	4011395116135	26	104
6128/28-81-500	2CKA006134A0331	4011395213810	26	256	6138/11-84-500	2CKA006138A0003	4011395116098	26	104
6128/28-81-500	2CKA006134A0331	4011395213810	26	256	6149/21-500	2CKA006133A0201	4011395118962	26	206
6128/28-82-500	2CKA006134A0332	4011395213827	26	256	6340-24G-101-500	2CKA006310A0109	4011395130926	34	203
6128/28-82-500	2CKA006134A0332	4011395213827	26	256	6340-811-101-500	2CKA006310A0168	4011395156742	34	203
6128/28-82-500	2CKA006134A0332	4011395213827	26	256	6340-825-101-500	2CKA006310A0108	4011395130919	34	203
6128/28-82-500	2CKA006134A0332	4011395213827	26	256	6340-866-101-500	2CKA006310A0106	4011395130889	34	203
6128/28-83-500	2CKA006134A0333	4011395213834	26	256	6341-24G-101-500	2CKA006310A0117	4011395131008	34	203
6128/28-840-500	2CKA006134A0342	4011395217245	26	256	6341-811-101-500	2CKA006310A0170	4011395156766	34	203
6128/28-84-500	2CKA006134A0334	4011395213841	26	256	6341-825-101-500	2CKA006310A0116	4011395130995	34	203
6128/28-84-500	2CKA006134A0334	4011395213841	26	256	6341-866-101-500	2CKA006310A0114	4011395130971	34	203
6128/28-84-500	2CKA006134A0334	4011395213841	26	256	6342-24G-101-500	2CKA006310A0125	4011395131084	34	203
6128/28-84-500	2CKA006134A0334	4011395213841	26	256	6342-811-101-500	2CKA006310A0172	4011395156780	34	203
6128/28-866-500	2CKA006134A0335	4011395213858	26	256	6342-825-101-500	2CKA006310A0124	4011395131077	34	203

Type	Oder code	EAN	PG	Page
6342-866-101-500	2CKA006310A0122	4011395131053	34	203
6345-24G-101-500	2CKA006310A0081	4011395118733	34	204
6345-811-101-500	2CKA006310A0176	4011395156834	34	204
6345-825-101-500	2CKA006310A0080	4011395118726	34	204
6345-866-101-500	2CKA006310A0078	4011395118689	34	204
6346/10-101-500	2CKA006310A0135	4011395131190	34	202
6346/11-101-500	2CKA006310A0137	4011395131220	34	202
6346/12-101-500	2CKA006310A0139	4011395131244	34	203
6348-24G-101-500	2CKA006310A0147	4011395131329	34	204
6348-811-101-500	2CKA006310A0178	4011395156858	34	204
6348-825-101-500	2CKA006310A0146	4011395131312	34	204
6348-860-101-500	2CKA006310A0144	4011395131299	34	204
6349-24G-101-500	2CKA006310A0155	4011395131428	34	205
6349-811-101-500	2CKA006310A0180	4011395156872	34	205
6349-825-101-500	2CKA006310A0154	4011395131404	34	205
6349-860-101-500	2CKA006310A0152	4011395131374	34	205
6350-825-101-500	2CKA006310A0157	4011395131442	34	204
6351/08-825-500	2CKA006310A0183	4011395198407	34	205
6352-24G-101-500	2CKA006310A0165	4011395131527	34	205
6352-811-101-500	2CKA006310A0182	4011395156896	34	205
6352-825-101-500	2CKA006310A0164	4011395131510	34	205
6352-860-101-500	2CKA006310A0162	4011395131497	34	205
6353/20-860-500	2CKA006310A0093	4011395118924	34	206
6353/30-860-500	2CKA006310A0094	4011395118931	34	206
6353/40-860-500	2CKA006310A0095	4011395118948	34	206
6353/50-860-500	2CKA006310A0096	4011395118955	34	206
64762-81-500	2CKA006800A2958	4011395293522	19	254
64762-81-500	2CKA006800A2958	4011395293522	19	254
64762-81-500	2CKA006800A2958	4011395293522	19	254
64762-82-500	2CKA006800A2960	4011395293539	19	254
64762-82-500	2CKA006800A2960	4011395293539	19	254
64762-82-500	2CKA006800A2960	4011395293539	19	254
64762-82-500	2CKA006800A2960	4011395293539	19	254
64762-83-500	2CKA006800A2962	4011395293546	19	254
64762-840-500	2CKA006800A2971	4011395293591	19	254
64762-84-500	2CKA006800A2964	4011395293553	19	254
64762-84-500	2CKA006800A2964	4011395293553	19	254
64762-84-500	2CKA006800A2964	4011395293553	19	254
64762-84-500	2CKA006800A2964	4011395293553	19	254
64762-866-500	2CKA006800A2973	4011395293607	19	254
64762-884-500	2CKA006800A2968	4011395293577	19	254
64762-885-500	2CKA006800A2970	4011395293584	19	254
64764-81-500	2CKA006800A2995	4011395293751	19	253
64764-81-500	2CKA006800A2995	4011395293751	19	253
64764-81-500	2CKA006800A2995	4011395293751	19	253
64764-82-500	2CKA006800A2997	4011395293768	19	253
64764-82-500	2CKA006800A2997	4011395293768	19	253
64764-82-500	2CKA006800A2997	4011395293768	19	253
64764-82-500	2CKA006800A2997	4011395293768	19	253
64764-83-500	2CKA006800A2999	4011395293775	19	253
64764-840-500	2CKA006800A3008	4011395293829	19	253
64764-84-500	2CKA006800A3001	4011395293782	19	253
64764-84-500	2CKA006800A3001	4011395293782	19	253
64764-84-500	2CKA006800A3001	4011395293782	19	253
64764-84-500	2CKA006800A3001	4011395293782	19	253
64764-866-500	2CKA006800A3010	4011395293836	19	253
64764-884-500	2CKA006800A3005	4011395293805	19	253
64764-885-500	2CKA006800A3007	4011395293812	19	253
64764-916-510	2CKA006800A3059	4011395316368	19	253
64765-81-500	2CKA006800A2883	4011395293058	19	252
64765-81-500	2CKA006800A2883	4011395293058	19	252
64765-81-500	2CKA006800A2883	4011395293058	19	252
64765-82-500	2CKA006800A2885	4011395293065	19	252

Type	Oder code	EAN	PG	Page
64765-82-500	2CKA006800A2885	4011395293065	19	252
64765-82-500	2CKA006800A2885	4011395293065	19	252
64765-82-500	2CKA006800A2885	4011395293065	19	252
64765-83-500	2CKA006800A2887	4011395293072	19	252
64765-840-500	2CKA006800A2896	4011395293126	19	252
64765-84-500	2CKA006800A2889	4011395293089	19	252
64765-84-500	2CKA006800A2889	4011395293089	19	252
64765-84-500	2CKA006800A2889	4011395293089	19	252
64765-84-500	2CKA006800A2889	4011395293089	19	252
64765-866-500	2CKA006800A2898	4011395293133	19	252
64765-884-500	2CKA006800A2893	4011395293102	19	252
64765-885-500	2CKA006800A2895	4011395293119	19	252
6541-20	2CKA006599A1466	4011395381007	19	279
6541-21	2CKA006599A1524	4011395381502	19	279
6541-24G	2CKA006599A2332	4011395708606	19	279
6541-266	2CKA006599A2856	4011395006344	19	279
6541-74	2CKA006599A2076	4011395541807	19	279
6541-774	2CKA006599A2971	4011395129562	19	279
6541-775	2CKA006599A2975	4011395136928	19	279
6541-783	2CKA006599A2919	4011395083468	19	279
6541-81	2CKA006599A2882	4011395056424	19	279
6541-81	2CKA006599A2882	4011395056424	19	279
6541-82	2CKA006599A2832	4011395995693	19	279
6541-82	2CKA006599A2832	4011395995693	19	279
6541-82	2CKA006599A2832	4011395995693	19	279
6541-83	2CKA006599A2885	4011395074459	19	279
6541-84	2CKA006599A2835	4011395996638	19	279
6541-84	2CKA006599A2835	4011395996638	19	279
6541-84	2CKA006599A2835	4011395996638	19	279
6541-84	2CKA006599A2835	4011395996638	19	279
6541-866	2CKA006599A2924	4011395088159	19	279
6541-884	2CKA006599A2962	4011395129647	19	279
6541-885	2CKA006599A2967	4011395129654	19	279
6828	2CKA006800A2514	4011395137451	14	142
6829-84	2CKA006800A2515	4011395137468	14	142
6833/01-84-500	2CKA006800A2721	4011395186978	14	141
6833-84-500	2CKA006800A2720	4011395186961	14	141
6851/DR-131-500	2CKA006800A3094	4011395319543	29	89
6851/DR-133-500	2CKA006800A3096	4011395319567	29	89
6851/DR-134-500	2CKA006800A3098	4011395319581	29	89
6851/DR-135-500	2CKA006800A3100	4011395319604	29	89
6851/DR-136-500	2CKA006800A3102	4011395319628	29	89
6851/EA-131-500	2CKA006800A3084	4011395319444	29	89
6851/EA-133-500	2CKA006800A3086	4011395319468	29	89
6851/EA-134-500	2CKA006800A3088	4011395319482	29	89
6851/EA-135-500	2CKA006800A3090	4011395319505	29	89
6851/EA-136-500	2CKA006800A3092	4011395319529	29	89
AA/A 2.1.2	2CDG110203R0011	4016779954075	26	46
AA/S 4.1.2	2CDG110202R0011	4016779962377	26	46
ABA/S 1.2.1	2CDG110192R0011	4016779929936	26	113
ABL/S 2.1	2CDG110073R0011	4016779652643	26	113
ABZ/S 2.1	2CDG110072R0011	4016779652360	26	113
AC/S 1.1.1	2CDG110205R0011	4016779011808	26	105
AC/S 1.2.1	2CDG110206R0011	4016779015806	26	105
AE/A 2.1	2CDG110086R0011	4016779664011	26	33
AE/S 4.1.1.3	2CDG110190R0011	4016779929295	26	33
AI562	1TNE968902R1102	6943747170169		111
AM/S 12.1	GHQ6310062R0111	4016779514811	26	10
AMD22710 AN	2CLA227100B1801	8427238259680		300
AMD22710 BL	2CLA227100B1101	8427238259666		300
AMD22710 CV	2CLA227100B1901	8427238259697		300
AMD22710 PL	2CLA227100B1301	8427238259673		300
AMD24720 AN	2CLA247200B1801	8427238260136		300



Selection Table According to Type

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
AMD24720 BL	2CLA247200B1101	8427238260112		300	CAR/U 4.2.1.1-71	2TAZ741010R2001	6941195435052		103
AMD24720 CV	2CLA247200B1901	8427238260143		300	CAR/U 4.2.1.1-84	2TAZ741010R0001	6941195435045		103
AMD24720 PL	2CLA247200B1301	8427238260129		300	CP-D 12/0.83	1SVR427041R1000	4016779661201		12
AMD26731 AN	2CLA267310B1801	8427238260235		300	CP-D 12/2.1	1SVR427043R1200	4016779661218		12
AMD26731 BL	2CLA267310B1101	8427238260211		300	CP-D 24/0.42	1SVR427041R0000	4016779661164		12
AMD26731 CV	2CLA267310B1901	8427238260242		300	CP-D 24/1.3	1SVR427043R0100	4016779661171		12
AMD26731 PL	2CLA267310B1301	8427238260228		300	CP-D 24/2.5	2CDG120037R0011	4016779697897		12
AMD28741 AN	2CLA287410B1801	8427238260334		300	CP-D 24/2.5	2CDG120037R0011	4016779697897	20	130
AMD28741 BL	2CLA287410B1101	8427238260310		300	CP-D 24/2.5	2CDG120037R0011	4016779697897	20	206
AMD28741 CV	2CLA287410B1901	8427238260341		300	CP-D 24/4.2	1SVR427045R0400	4016779661195		12
AMD28741 PL	2CLA287410B1301	8427238260327		300	CP-D RU	1SVR427049R0000	4016779845267		12
AMD5053	2CLA627190N1001	8427238099149		288	CP-FCC-212	2CKA006220A0245	4011395187487	24	281
AMD5153-AG	2CLA637100N1601	8427238096834		288	CP-FCC-214	2CKA006220A0246	4011395187494	24	281
AMD5153-BG	2CLA637100N3101	8427238222776		288	CP-FCC-803	2CKA006220A0566	4011395205754	24	281
AMD5153-DU	2CLA637100N6201	8427238245478		288	CP-FCC-81	2CKA006220A0242	4011395187456	24	281
AMD5153-MG	2CLA637100N1701	8427238096841		288	CP-FCC-81	2CKA006220A0242	4011395187456	24	281
AMD5153-MO	2CLA667200N6601	8427238245492		288	CP-FCC-81	2CKA006220A0242	4011395187456	24	281
AMD5153-SB	2CLA637100N1501	8427238096827		288	CP-FCC-82	2CKA006220A0532	4011395205716	24	281
AMD5153-ST	2CLA637100N1101	8427238096810		288	CP-FCC-82	2CKA006220A0532	4011395205716	24	281
AMD5153-WG	2CLA637100N3001	8427238222769		288	CP-FCC-82	2CKA006220A0532	4011395205716	24	281
AMD5253-AG	2CLA667200N1601	8427238096919		288	CP-FCC-82	2CKA006220A0532	4011395205716	24	281
AMD5253-BG	2CLA667200N3101	8427238222790		288	CP-FCC-83	2CKA006220A0243	4011395187463	24	281
AMD5253-DU	2CLA667200N6201	8427238245775		288	CP-FCC-84	2CKA006220A0244	4011395187470	24	281
AMD5253-MG	2CLA667200N1701	8427238096926		288	CP-FCC-84	2CKA006220A0244	4011395187470	24	281
AMD5253-MO	2CLA667200N6601	8427238245799		288	CP-FCC-84	2CKA006220A0244	4011395187470	24	281
AMD5253-SB	2CLA667200N1501	8427238096902		288	CP-FCC-84	2CKA006220A0244	4011395187470	24	281
AMD5253-ST	2CLA667200N1101	8427238096896		288	CP-FCC-866	2CKA006220A0549	4011395205730	24	281
AMD5253-WG	2CLA667200N3001	8427238222783		288	CP-FCC-884	2CKA006220A0617	4011395205822	24	281
AX561	1TNE968902R1301	6943747170190		110	CP-FCC-885	2CKA006220A0634	4011395205846	24	281
BA/U1.0.1	2CKA006120A0080	4011395334447	26	223	CSE/U0.1.1.CK	2CKA006199A0512	4011395339268	26	226
BA/U1.0.1	2CKA006120A0080	4011395334447	26	228	CSE/U0.1.1.CK	2CKA006199A0512	4011395339268	26	234
BA/U1.0.1	2CKA006120A0080	4011395334447	26	236	CSE/U0.1.1.CK	2CKA006199A0512	4011395339268	26	240
BA/U1.0.1	2CKA006120A0080	4011395334447	26	242	CSE/U0.1.1.CK	2CKA006199A0512	4011395339268	26	245
BA/U1.0.1	2CKA006120A0080	4011395334447	26	254	CT/S 2.1	2CKA006136A0218	4011395310168	26	128
BCI/S 1.1.1	2CDG110222R0011	4016779011655	26	108	DC562	1SAP231900R0000	4016779927574		109
BDB/S 1.1	2CDG110067R0011	4016779657532	26	136	DG/S 1.64.1.1	2CDG110198R0011	4016779579933	26	58
BE/M 4.12.1	2CDG110007R0011	4016779583138	26	26	DG/S 1.64.5.1	2CDG110273R0011	4016779067201	26	58
BE/M 4.230.1	2CDG110005R0011	4016779583114	26	26	DG/S 2.64.1.1	2CDG110199R0011	4016779942850	26	58
BE/M 4.24.1	2CDG110006R0011	4016779583121	26	26	DG/S 2.64.5.1	2CDG110274R0011	4016779067218	26	58
BE/S 10.20.3.2	2CDG110277R0011	4053546110838	26	32	DG/S 8.1	2CDG110025R0011	4016779585828	26	59
BE/S 10.230.3.2	2CDG110281R0011	4053546110876	26	32	DI572	1SAP230500R0000	4013614501449		109
BE/S 12.230.3.2	2CDG110282R0011	4053546110883	26	32	DLR/A 4.8.1.1	2CDG110172R0011	4016779882378	26	59
BE/S 16.20.3.2	2CDG110278R0011	4053546110845	26	32	DLR/S 8.16.1M	2CDG110101R0011	4016779676564	26	59
BE/S 16.230.3.2	2CDG110283R0011	4053546110890	26	32	DM200-TOOL	1SAS010000R0102	4013614525711		109
BE/S 4.20.3.2	2CDG110276R0011	4053546110821	26	32	DO572	1TNE968902R2203	6943747170268		110
BE/S 4.230.3.2	2CDG110279R0011	4053546110852	26	32	DR/S 4.1	2CDG110029R0011	4016779587556	26	11
BE/S 8.230.3.2	2CDG110280R0011	4053546110869	26	32	DSM/S 1.1	2CDG110060R0011	4016779652056	26	19
BM/A4.1-131	2CKA006132A0425	4011395319338	26	88	DX571	1TNE968902R2302	6943747170282		110
BM/A4.1-133	2CKA006132A0426	4011395319345	26	88	EM/S 3.16.1	2CDG110148R0011	4016779877060	26	134
BM/A4.1-134	2CKA006132A0427	4011395319352	26	88	ER/U 1.1	GHQ6310044R0011	4016779497251	26	96
BM/A4.1-135	2CKA006132A0428	4011395319369	26	88	ES/M 2.230.1	2CDG110013R0011	4016779583619	26	27
BM/A4.1-136	2CKA006132A0429	4011395319376	26	88	ES/M 2.24.1	2CDG110014R0011	4016779583626	26	27
BMB/U1.1-916	2CKA006132A0468	4011395362822		79	EUB/S 1.1	2CDG110066R0011	4016779649919	26	136
BMH/U2.1.1-884	2TYZ510205G0601	6925897543802		73	FAD/A 1.1	2CDG120040R0011	4016779906685	20	114
BMH/U2.1.1-885	2TYZ510205G0701	6925897543895		73	FAG/A 1.2	2CDG120070R0011	4013614556517	20	114
BMH/U2.55.1-884	2TYZ510505G0601	6925897543819		73	FCC/S 1.1.1.1	2CDG110210R0011	4016779011426	26	101
BMH/U2.55.1-885	2TYZ510505G0701	6925897543901		73	FCC/S 1.1.2.1	2CDG110211R0011	4016779011433	26	101
BMH/U4.5.1-884	2TYZ510215G0601	6925897543826		73	FCC/S 1.2.1.1	2CDG110212R0011	4016779011440	26	101
BMH/U4.5.1-885	2TYZ510215G0701	6925897543918		73	FCC/S 1.2.2.1	2CDG110213R0011	4016779011457	26	101
BOX/U 5.1	2TMA200160B0003	6955891816206	26	118	FCC/S 1.3.1.1	2CDG110214R0011	4016779011464	26	102
BUSKLEMME	GHQ6301901R0001	4012233802302	20	20	FCC/S 1.3.2.1	2CDG110215R0011	4016779011471	26	102
CAR/U 4.1.1.1-71	2TAZ740010R2001	6941195435038		103	FCC/S 1.4.1.1	2CDG110209R0011	4016779011419	26	102
CAR/U 4.1.1.1-84	2TAZ740010R0001	6941195435021		103	FCC/S 1.5.1.1	2CDG110234R0011	4016779011518	26	103

Type	Oder code	EAN	PG	Page
FCC/S 1.5.2.1	2CDG110235R0011	4016779011525	26	103
FCL/S 1.6.1.1	2CDG110163R0011	4016779877886	26	104
FCL/S 2.6.1.1	2CDG110164R0011	4016779877879	26	104
FW/S 8.2.1	2CDG120039R0011	4016779906661	20	114
H8236-4B	2TMA130050B0065	6955891816978	23	123
H8236-4W	2TMA130050W0065	6955891816961	23	123
H8236-5B	2TMA130050B0067	6955891816992	23	123
H8236-5W	2TMA130050W0067	6955891816985	23	123
H8237-4B	2TMA130050B0054	6955891815155	23	124
H8237-4W	2TMA130050W0054	6955891815148	23	124
H8237-5B	2TMA130050B0055	6955891815179	23	124
H8237-5W	2TMA130050W0055	6955891815162	23	124
HCC/S 2.1.1.1	2CDG110218R0011	4016779011617	26	107
HCC/S 2.1.2.1	2CDG110219R0011	4016779011624	26	107
HCC/S 2.2.1.1	2CDG110220R0011	4016779011631	26	107
HCC/S 2.2.2.1	2CDG110221R0011	4016779011648	26	107
HS/S 4.2.1	2CDG120044R0011	4016779906722	20	66
IO/S 4.6.1.1	2CDG110168R0011	4016779881074	26	45
IO/S 8.6.1.1	2CDG110169R0011	4016779881081	26	45
IPM/S 1.1	2CDG120036R0011	4016779697903	20	17
IPR/S 3.1.1	2CDG110175R0011	4016779906487	26	16
IPR/S 3.5.1	2CDG110176R0011	4016779906500	26	15
IPS/S 3.1.1	2CDG110177R0011	4016779906517	26	16
IPS/S 3.5.1	2CDG110204R0011	4016779016414	26	16
IS/S 8.1.1	2CDG120082R0011	4053546045512	20	17
ISP/S 8.1.1.1	2CDG120083R0011	4053546045529	20	17
JA/M 2.230.1	2CDG110003R0011	4016779583152	26	26
JA/M 2.24.1	2CDG110004R0011	4016779583169	26	26
JA/S 4.SMI.1M	2CDG110028R0011	4016779654234	26	51
JRA/S 12.230.2.2	2CDG110287R0011	4053546110920	26	49
JRA/S 12.230.5.2	2CDG110291R0011	4053546110968	26	49
JRA/S 2.230.2.2	2CDG110284R0011	4053546110814	26	49
JRA/S 2.230.5.2	2CDG110288R0011	4053546110937	26	49
JRA/S 2.24.2.2	2CDG110295R0011	4053546111002	26	50
JRA/S 4.230.2.2	2CDG110285R0011	4053546110906	26	49
JRA/S 4.230.4.2	2CDG110292R0011	4053546110975	26	49
JRA/S 4.230.5.2	2CDG110289R0011	4053546110944	26	49
JRA/S 4.230.7.2	2CDG110294R0011	4053546110999	26	50
JRA/S 4.24.2.2	2CDG110296R0011	4053546111019	26	50
JRA/S 4.24.5.2	2CDG110298R0011	4053546111033	26	50
JRA/S 8.230.2.2	2CDG110286R0011	4053546110913	26	49
JRA/S 8.230.4.2	2CDG110293R0011	4053546110982	26	49
JRA/S 8.230.5.2	2CDG110290R0011	4053546110951	26	49
JRA/S 8.24.2.2	2CDG110297R0011	4053546111026	26	50
JSB/S 1.1	GHQ6310084R0111	4016779579933	26	51
KK/U.4.55.1	2CKA006115A0506	4011395334423	26	223
KK/U.4.55.1	2CKA006115A0506	4011395334423	26	242
KK/U.4.63.1	2CKA006115A0504	4011395334409	26	228
KK/U.4.70.1	2CKA006115A0510	4011395337776	26	236
KLEMMME	GHQ6301902R0001	4016779079303	20	20
KS/K 2.1	GHQ6301910R0011	4016779528931	20	11
KS/K 4.1	GHQ6301910R0001	4016779517256	20	11
LF/U 2.1	2CDG110089R0011	4016779664165	26	63
LEAW/A.1.55.1-914	2CKA006199A0346	4011395337325	26	225
LEAW/A.1.55.91-916	2CKA006199A0504	4011395339183		244
LEAW/A.1.63.1-81	2CKA006199A0279	4011395336496	26	232
LEAW/A.1.63.1-83	2CKA006199A0281	4011395336519	26	232
LEAW/A.1.63.1-84	2CKA006199A0282	4011395336526	26	232
LEAW/A.1.63.1-866	2CKA006199A0286	4011395336564	26	232
LEAW/A.1.63.1-884	2CKA006199A0283	4011395336533	26	232
LEAW/A.1.63.1-885	2CKA006199A0284	4011395336540	26	232
LEAW/A.1.70.1-44G	2CKA006199A0444	4011395338537	26	239
LEAW/A.1.70.1-44M	2CKA006199A0460	4011395338698	26	239

Type	Oder code	EAN	PG	Page
LEAW/A.1.70.1-45M	2CKA006199A0492	4011395339015	26	239
LEAW/A.2.55.1-914	2CKA006199A0351	4011395337370	26	226
LEAW/A.2.55.91-916	2CKA006199A0509	4011395339237		245
LEAW/A.2.63.1-81	2CKA006199A0319	4011395336892	26	233
LEAW/A.2.63.1-82	2CKA006199A0320	4011395336908	26	233
LEAW/A.2.63.1-83	2CKA006199A0321	4011395336915	26	233
LEAW/A.2.63.1-84	2CKA006199A0322	4011395336922	26	233
LEAW/A.2.63.1-866	2CKA006199A0326	4011395336960	26	233
LEAW/A.2.63.1-884	2CKA006199A0323	4011395336939	26	233
LEAW/A.2.63.1-885	2CKA006199A0324	4011395336946	26	233
LEAW/A.2.70.1-44G	2CKA006199A0449	4011395338582	26	240
LEAW/A.2.70.1-44M	2CKA006199A0465	4011395338742	26	240
LEAW/A.2.70.1-45M	2CKA006199A0497	4011395339060	26	240
LFB/A.1.55.91-916	2CKA006199A0499	4011395339138		243
LFB/A.1.70.1-44G	2CKA006199A0439	4011395338483	26	238
LFB/A.1.70.1-44M	2CKA006199A0455	4011395338643	26	238
LFB/A.1.70.1-45M	2CKA006199A0487	4011395338964	26	238
LFBT/A.1.55.1-914	2CKA006199A0174	4011395337271	26	224
LFBT/A.1.63.1-81	2CKA006199A0134	4011395336090	26	230
LFBT/A.1.63.1-82	2CKA006199A0135	4011395336106	26	230
LFBT/A.1.63.1-83	2CKA006199A0136	4011395336113	26	230
LFBT/A.1.63.1-84	2CKA006199A0137	4011395336120	26	230
LFBT/A.1.63.1-866	2CKA006199A0141	4011395336168	26	230
LFBT/A.1.63.1-884	2CKA006199A0138	4011395336137	26	230
LFBT/A.1.63.1-885	2CKA006199A0139	4011395336144	26	230
LFBT/A.2.55.1-914	2CKA006199A0347	4011395337332	26	225
LFBT/A.2.55.91-916	2CKA006199A0505	4011395339190		244
LFBT/A.2.63.1-81	2CKA006199A0287	4011395336571	26	232
LFBT/A.2.63.1-82	2CKA006199A0288	4011395336588	26	232
LFBT/A.2.63.1-83	2CKA006199A0289	4011395336595	26	232
LFBT/A.2.63.1-84	2CKA006199A0290	4011395336601	26	232
LFBT/A.2.63.1-866	2CKA006199A0294	4011395336649	26	232
LFBT/A.2.63.1-884	2CKA006199A0291	4011395336618	26	232
LFBT/A.2.63.1-885	2CKA006199A0292	4011395336625	26	232
LFBT/A.2.70.1-44G	2CKA006199A0445	4011395338544	26	239
LFBT/A.2.70.1-44M	2CKA006199A0461	4011395338704	26	239
LFBT/A.2.70.1-45M	2CKA006199A0493	4011395339022	26	239
LEFDW/A.1.55.1-914	2CKA006199A0344	4011395337301	26	225
LEFDW/A.1.55.91-916	2CKA006199A0502	4011395339169		244
LEFDW/A.1.63.1-81	2CKA006199A0263	4011395336335	26	231
LEFDW/A.1.63.1-83	2CKA006199A0265	4011395336359	26	231
LEFDW/A.1.63.1-84	2CKA006199A0266	4011395336366	26	231
LEFDW/A.1.63.1-866	2CKA006199A0270	4011395336403	26	231
LEFDW/A.1.63.1-884	2CKA006199A0267	4011395336373	26	231
LEFDW/A.1.63.1-885	2CKA006199A0268	4011395336380	26	231
LEFDW/A.1.70.1-44G	2CKA006199A0442	4011395338513	26	238
LEFDW/A.1.70.1-44M	2CKA006199A0458	4011395338674	26	238
LEFDW/A.1.70.1-45M	2CKA006199A0490	4011395338995	26	238
LEFDW/A.2.55.1-914	2CKA006199A0350	4011395337363	26	226
LEFDW/A.2.55.91-916	2CKA006199A0508	4011395339220		245
LEFDW/A.2.63.1-81	2CKA006199A0311	4011395336816	26	233
LEFDW/A.2.63.1-83	2CKA006199A0313	4011395336830	26	233
LEFDW/A.2.63.1-84	2CKA006199A0314	4011395336847	26	233
LEFDW/A.2.63.1-866	2CKA006199A0318	4011395336885	26	233
LEFDW/A.2.63.1-884	2CKA006199A0315	4011395336854	26	233
LEFDW/A.2.63.1-885	2CKA006199A0316	4011395336861	26	233
LEFDW/A.2.70.1-44G	2CKA006199A0448	4011395338575	26	240
LEFDW/A.2.70.1-44M	2CKA006199A0464	4011395338735	26	240
LEFDW/A.2.70.1-45M	2CKA006199A0496	4011395339053	26	240
LEFJ/A.1.55.91-916	2CKA006199A0500	4011395339145		243
LEFJ/A.1.70.1-44G	2CKA006199A0440	4011395338490	26	238
LEFJ/A.1.70.1-44M	2CKA006199A0456	4011395338650	26	238
LEFJ/A.1.70.1-45M	2CKA006199A0488	4011395338971	26	238

Selection Table According to Type

Type	Oder code	EAN	PG	Page
LFJT/A.1.55.1-914	2CKA006199A0175	4011395337288	26	224
LFJT/A.1.63.1-81	2CKA006199A0143	4011395336175	26	230
LFJT/A.1.63.1-83	2CKA006199A0145	4011395336199	26	230
LFJT/A.1.63.1-84	2CKA006199A0146	4011395336205	26	230
LFJT/A.1.63.1-866	2CKA006199A0150	4011395336243	26	230
LFJT/A.1.63.1-884	2CKA006199A0147	4011395336212	26	230
LFJT/A.1.63.1-885	2CKA006199A0148	4011395336229	26	230
LFJT/A.2.55.1-914	2CKA006199A0348	4011395337349	26	225
LFJT/A.2.55.91-916	2CKA006199A0506	4011395339206		244
LFJT/A.2.63.1-81	2CKA006199A0295	4011395336656	26	232
LFJT/A.2.63.1-83	2CKA006199A0297	4011395336670	26	232
LFJT/A.2.63.1-84	2CKA006199A0298	4011395336687	26	232
LFJT/A.2.63.1-866	2CKA006199A0302	4011395336724	26	232
LFJT/A.2.63.1-884	2CKA006199A0299	4011395336694	26	232
LFJT/A.2.63.1-885	2CKA006199A0300	4011395336700	26	232
LFJT/A.2.70.1-44G	2CKA006199A0446	4011395338551	26	239
LFJT/A.2.70.1-44M	2CKA006199A0462	4011395338711	26	239
LFJT/A.2.70.1-45M	2CKA006199A0494	4011395339039	26	239
LFJW/A.1.55.1-914	2CKA006199A0345	4011395337318	26	225
LFJW/A.1.55.91-916	2CKA006199A0503	4011395339176		244
LFJW/A.1.63.1-81	2CKA006199A0271	4011395336410	26	231
LFJW/A.1.63.1-82	2CKA006199A0272	4011395336427	26	231
LFJW/A.1.63.1-83	2CKA006199A0273	4011395336434	26	231
LFJW/A.1.63.1-84	2CKA006199A0274	4011395336441	26	231
LFJW/A.1.63.1-866	2CKA006199A0278	4011395336489	26	231
LFJW/A.1.63.1-884	2CKA006199A0275	4011395336458	26	231
LFJW/A.1.63.1-885	2CKA006199A0276	4011395336465	26	231
LFJW/A.1.70.1-44G	2CKA006199A0443	4011395338520	26	239
LFJW/A.1.70.1-44M	2CKA006199A0459	4011395338681	26	239
LFJW/A.1.70.1-45M	2CKA006199A0491	4011395339008	26	239
LFMW/A.4.55.1-914	2CKA006199A0352	4011395337387	26	226
LFMW/A.4.55.91-916	2CKA006199A0510	4011395339244		245
LFMW/A.4.63.1-81	2CKA006199A0327	4011395336977	26	234
LFMW/A.4.63.1-82	2CKA006199A0328	4011395336984	26	234
LFMW/A.4.63.1-83	2CKA006199A0329	4011395336991	26	234
LFMW/A.4.63.1-84	2CKA006199A0330	4011395337004	26	234
LFMW/A.4.63.1-866	2CKA006199A0334	4011395337042	26	234
LFMW/A.4.63.1-884	2CKA006199A0331	4011395337011	26	234
LFMW/A.4.63.1-885	2CKA006199A0332	4011395337028	26	234
LFMW/A.4.70.1-44G	2CKA006199A0450	4011395338599	26	240
LFMW/A.4.70.1-44M	2CKA006199A0466	4011395338759	26	240
LFMW/A.4.70.1-45M	2CKA006199A0498	4011395339077	26	240
LFO/A.1.1	2CDG120045R0011	4016779906739	20	66
LFS/A.1.55.91-916	2CKA006199A0501	4011395339152		244
LFS/A.1.70.1-44G	2CKA006199A0441	4011395338506	26	238
LFS/A.1.70.1-44M	2CKA006199A0457	4011395338667	26	238
LFS/A.1.70.1-45M	2CKA006199A0489	4011395338988	26	238
LFST/A.1.55.1-914	2CKA006199A0176	4011395337295	26	224
LFST/A.1.63.1-81	2CKA006199A0152	4011395336250	26	231
LFST/A.1.63.1-82	2CKA006199A0153	4011395336267	26	231
LFST/A.1.63.1-83	2CKA006199A0154	4011395336274	26	231
LFST/A.1.63.1-84	2CKA006199A0155	4011395336281	26	231
LFST/A.1.63.1-866	2CKA006199A0159	4011395336328	26	231
LFST/A.1.63.1-884	2CKA006199A0156	4011395336298	26	231
LFST/A.1.63.1-885	2CKA006199A0157	4011395336304	26	231
LFST/A.2.55.1-914	2CKA006199A0349	4011395337356	26	225
LFST/A.2.55.91-916	2CKA006199A0507	4011395339213		245
LFST/A.2.63.1-81	2CKA006199A0303	4011395336731	26	233
LFST/A.2.63.1-82	2CKA006199A0304	4011395336748	26	233
LFST/A.2.63.1-83	2CKA006199A0305	4011395336755	26	233
LFST/A.2.63.1-84	2CKA006199A0306	4011395336762	26	233
LFST/A.2.63.1-866	2CKA006199A0310	4011395336809	26	233
LFST/A.2.63.1-884	2CKA006199A0307	4011395336779	26	233

Type	Oder code	EAN	PG	Page
LFST/A.2.63.1-885	2CKA006199A0308	4011395336786	26	233
LFST/A.2.70.1-44G	2CKA006199A0447	4011395338568	26	240
LFST/A.2.70.1-44M	2CKA006199A0463	4011395338728	26	240
LFST/A.2.70.1-45M	2CKA006199A0495	4011395339046	26	240
LFW/A.0.55.1-CK	2CKA006199A0162	4011395337066	26	224
LFW/A.0.55.91-CK	2CKA006199A0185	4011395339084		242
LFW/A.0.63.1-CK	2CKA006199A0041	4011395334485	26	228
LFW/A.0.63.1-CKL	2CKA006199A0514	4011395345177	26	228
LFW/A.0.70.1-CK	2CKA006199A0025	4011395337790	26	236
LFW/A.0.70.1-CKL	2CKA006199A0519	4011395345221	26	236
LFW/A.1.55.1-914	2CKA006199A0170	4011395337233	26	224
LFW/A.1.55.91-916	2CKA006199A0186	4011395339091		243
LFW/A.1.63.1-81	2CKA006199A0098	4011395335772	26	229
LFW/A.1.63.1-82	2CKA006199A0099	4011395335789	26	229
LFW/A.1.63.1-83	2CKA006199A0100	4011395335796	26	229
LFW/A.1.63.1-84	2CKA006199A0101	4011395335802	26	229
LFW/A.1.63.1-866	2CKA006199A0105	4011395335840	26	229
LFW/A.1.63.1-884	2CKA006199A0102	4011395335819	26	229
LFW/A.1.63.1-885	2CKA006199A0103	4011395335826	26	229
LFW/A.1.70.1-44G	2CKA006199A0435	4011395338445	26	237
LFW/A.1.70.1-44M	2CKA006199A0451	4011395338605	26	237
LFW/A.1.70.1-45M	2CKA006199A0483	4011395338926	26	237
LFW/A.2.55.1-914	2CKA006199A0171	4011395337240	26	224
LFW/A.2.55.91-916	2CKA006199A0187	4011395339107		243
LFW/A.2.63.1-81	2CKA006199A0107	4011395335857	26	229
LFW/A.2.63.1-83	2CKA006199A0109	4011395335871	26	229
LFW/A.2.63.1-84	2CKA006199A0110	4011395335888	26	229
LFW/A.2.63.1-866	2CKA006199A0114	4011395335925	26	229
LFW/A.2.63.1-884	2CKA006199A0111	4011395335895	26	229
LFW/A.2.63.1-885	2CKA006199A0112	4011395335901	26	229
LFW/A.2.70.1-44G	2CKA006199A0436	4011395338452	26	237
LFW/A.2.70.1-44M	2CKA006199A0452	4011395338612	26	237
LFW/A.2.70.1-45M	2CKA006199A0484	4011395338933	26	237
LFW/A.3.55.1-914	2CKA006199A0172	4011395337257	26	224
LFW/A.3.55.91-916	2CKA006199A0188	4011395339114		243
LFW/A.3.63.1-81	2CKA006199A0116	4011395335932	26	229
LFW/A.3.63.1-82	2CKA006199A0117	4011395335949	26	229
LFW/A.3.63.1-83	2CKA006199A0118	4011395335956	26	229
LFW/A.3.63.1-84	2CKA006199A0119	4011395335963	26	229
LFW/A.3.63.1-866	2CKA006199A0123	4011395336007	26	229
LFW/A.3.63.1-884	2CKA006199A0120	4011395335970	26	229
LFW/A.3.63.1-885	2CKA006199A0121	4011395335987	26	229
LFW/A.3.70.1-44G	2CKA006199A0437	4011395338469	26	237
LFW/A.3.70.1-44M	2CKA006199A0453	4011395338629	26	237
LFW/A.3.70.1-45M	2CKA006199A0485	4011395338940	26	237
LFW/A.4.55.1-914	2CKA006199A0173	4011395337264	26	224
LFW/A.4.55.91-916	2CKA006199A0189	4011395339121		243
LFW/A.4.63.1-81	2CKA006199A0125	4011395336014	26	230
LFW/A.4.63.1-83	2CKA006199A0127	4011395336038	26	230
LFW/A.4.63.1-84	2CKA006199A0128	4011395336045	26	230
LFW/A.4.63.1-866	2CKA006199A0132	4011395336083	26	230
LFW/A.4.63.1-884	2CKA006199A0129	4011395336052	26	230
LFW/A.4.63.1-885	2CKA006199A0130	4011395336069	26	230
LFW/A.4.70.1-44G	2CKA006199A0438	4011395338476	26	237
LFW/A.4.70.1-44M	2CKA006199A0454	4011395338636	26	237
LFW/A.4.70.1-45M	2CKA006199A0486	4011395338957	26	237
LGS/A.1.2	2CDG120059R0011	4016779015714	20	105
LL/S 4.3	2CDG110310R0011	4016779138819	26	15
LL/S 1.1	GHQ6050053R0001	4016779392105	20	17
LM/S 1.1	GHQ6310080R0111	4016779581219	26	113
LR/M 1.6.2	2CDG110108R0011	4016779680677	26	27
LR/S 2.16.1	2CDG110087R0011	4016779664059	26	63
LR/S 4.16.1	2CDG110088R0011	4016779664899	26	63

Type	Oder code	EAN	PG	Page
MA/Z 1.50.1	2CDG120094R0011	4053546162431	20	34
MC-C1.1	2CDG250006R0011	4016779067300	50	140
MG/S 11.100.1.1	2CDG120089R0011	4013614571084	20	18
MPG/S 8.1.1	2CDG110311R0011	4016779141222	26	107
MRS/W	GHQ3201972R0001	4016779506601	50	140
MT/S 4.12.2M	2CDG110109R0011	4016779711876	26	139
MT/S 8.12.2M	2CDG110110R0011	4016779711869	26	139
MT/U 2.12.2	2CDG110111R0011	4016779711760	26	139
N2121 AA	2CLA212100N1601	8427238241876	302	
N2121 AN	2CLA212100N1801	8427238241883	302	
N2121 BB	2CLA212100N1201	8427238241852	302	
N2121 BL	2CLA212100N1101	8427238241845	302	
N2121 CV	2CLA212100N1901	8427238241890	302	
N2121 PL	2CLA212100N1301	8427238241869	302	
N2121.1 AA	2CLA212110N1601	8427238242057	303	
N2121.1 AN	2CLA212110N1801	8427238242064	303	
N2121.1 BB	2CLA212110N1201	8427238242033	303	
N2121.1 BL	2CLA212110N1101	8427238242026	303	
N2121.1 CV	2CLA212110N1901	8427238242071	303	
N2121.1 PL	2CLA212110N1301	8427238242040	303	
N2121.1R AA	2CLA212112N1601	8427238247946	303	
N2121.1R AN	2CLA212112N1801	8427238247953	303	
N2121.1R BB	2CLA212112N1201	8427238247922	303	
N2121.1R BL	2CLA212112N1101	8427238247915	303	
N2121.1R CV	2CLA212112N1901	8427238247960	303	
N2121.1R PL	2CLA212112N1301	8427238247939	303	
N2121.3 AA	2CLA212130N1601	8427238242118	304	
N2121.3 AN	2CLA212130N1801	8427238242125	304	
N2121.3 BB	2CLA212130N1201	8427238242095	304	
N2121.3 BL	2CLA212130N1101	8427238242088	304	
N2121.3 CV	2CLA212130N1901	8427238242132	304	
N2121.3 PL	2CLA212130N1301	8427238242101	304	
N2121.5 AA	2CLA212150N1601	8427238242170	304	
N2121.5 AN	2CLA212150N1801	8427238242187	304	
N2121.5 BB	2CLA212150N1201	8427238242156	304	
N2121.5 BL	2CLA212150N1101	8427238242149	304	
N2121.5 CV	2CLA212150N1901	8427238242194	304	
N2121.5 PL	2CLA212150N1301	8427238242163	304	
N2121.5R AA	2CLA212152N1601	8427238248004	305	
N2121.5R AN	2CLA212152N1801	8427238248011	305	
N2121.5R BB	2CLA212152N1201	8427238247984	305	
N2121.5R BL	2CLA212152N1101	8427238247977	305	
N2121.5R CV	2CLA212152N1901	8427238248028	305	
N2121.5R PL	2CLA212152N1301	8427238247991	305	
N2121.8 AA	2CLA212180N1601	8427238242231	305	
N2121.8 AN	2CLA212180N1801	8427238242248	305	
N2121.8 BB	2CLA212180N1201	8427238242217	305	
N2121.8 BL	2CLA212180N1101	8427238242200	305	
N2121.8 CV	2CLA212180N1901	8427238242255	305	
N2121.8 PL	2CLA212180N1301	8427238242224	305	
N2121.8R AA	2CLA212182N1601	8427238248066	306	
N2121.8R AN	2CLA222180N1801	8427238242606	306	
N2121.8R BB	2CLA212182N1201	8427238248042	306	
N2121.8R BL	2CLA212182N1101	8427238248035	306	
N2121.8R CV	2CLA222180N1901	8427238242613	306	
N2121.8R PL	2CLA212182N1301	8427238248059	306	
N2121.9 AA	2CLA212190N1601	8427238242293	306	
N2121.9 AN	2CLA212190N1801	8427238242309	306	
N2121.9 BB	2CLA212190N1201	8427238242279	306	
N2121.9 BL	2CLA212190N1101	8427238242262	306	
N2121.9 CV	2CLA212190N1901	8427238242316	306	
N2121.9 PL	2CLA212190N1301	8427238242286	306	
N2121.9R AA	2CLA212192N1601	8427238248127	307	

Type	Oder code	EAN	PG	Page
N2121.9R AN	2CLA212192N1801	8427238248134	307	
N2121.9R BB	2CLA212192N1201	8427238248103	307	
N2121.9R BL	2CLA212192N1101	8427238248097	307	
N2121.9R CV	2CLA212192N1901	8427238248141	307	
N2121.9R PL	2CLA212192N1301	8427238248110	307	
N2221 AA	2CLA222100N1601	8427238241937	302	
N2221 AN	2CLA222100N1801	8427238241944	302	
N2221 BB	2CLA222100N1201	8427238241913	302	
N2221 BL	2CLA222100N1101	8427238241906	302	
N2221 CV	2CLA222100N1901	8427238241951	302	
N2221 PL	2CLA222100N1301	8427238241920	302	
N2221.1 AA	2CLA222110N1601	8427238242415	303	
N2221.1 AN	2CLA222110N1801	8427238242422	303	
N2221.1 BB	2CLA222110N1201	8427238242392	303	
N2221.1 BL	2CLA222110N1101	8427238242385	303	
N2221.1 CV	2CLA222110N1901	8427238242439	303	
N2221.1 PL	2CLA222110N1301	8427238242408	303	
N2221.2 AN	2CLA222120N1801	8427238100333	292	
N2221.2 BL	2CLA222120N1101	8427238100326	292	
N2221.2 PL	2CLA222120N1301	8427238100340	292	
N2221.3 AA	2CLA222130N1601	8427238242477	304	
N2221.3 AN	2CLA222130N1801	8427238242484	304	
N2221.3 BB	2CLA222130N1201	8427238242453	304	
N2221.3 BL	2CLA222130N1101	8427238242446	304	
N2221.3 CV	2CLA222130N1901	8427238242491	304	
N2221.3 PL	2CLA222130N1301	8427238242460	304	
N2221.4 AN	2CLA222140N1801	8427238100449	292	
N2221.4 BL	2CLA222140N1101	8427238100432	292	
N2221.4 PL	2CLA222140N1301	8427238100456	292	
N2221.5 AA	2CLA222150N1601	8427238242538	305	
N2221.5 AN	2CLA222150N1801	8427238242545	305	
N2221.5 BB	2CLA222150N1201	8427238242514	305	
N2221.5 BL	2CLA222150N1101	8427238242507	305	
N2221.5 CV	2CLA222150N1901	8427238242552	305	
N2221.5 PL	2CLA222150N1301	8427238242521	305	
N2221.6 AN	2CLA222160N1801	8427238100548	293	
N2221.6 BL	2CLA222160N1101	8427238100531	293	
N2221.6 PL	2CLA222160N1301	8427238100555	293	
N2221.7 AN	2CLA222170N1801	8427238100661	293	
N2221.7 BL	2CLA222170N1101	8427238100654	293	
N2221.7 PL	2CLA222170N1301	8427238100678	293	
N2221.8 AA	2CLA222180N1601	8427238242590	306	
N2221.8 AN	2CLA222180N1801	8427238242606	306	
N2221.8 BB	2CLA222180N1201	8427238242576	306	
N2221.8 BL	2CLA222180N1101	8427238242569	306	
N2221.8 CV	2CLA222180N1901	8427238242613	306	
N2221.8 PL	2CLA222180N1301	8427238242583	306	
N2221.9 AA	2CLA222190N1601	8427238242651	307	
N2221.9 AN	2CLA222190N1801	8427238242668	307	
N2221.9 BB	2CLA222190N1201	8427238242637	307	
N2221.9 BL	2CLA222190N1101	8427238242620	307	
N2221.9 CV	2CLA222190N1901	8427238242675	307	
N2221.9 PL	2CLA222190N1301	8427238242644	307	
N2240.4 AN	2CLA224040N1801	8427238100722	294	
N2240.4 BL	2CLA224040N1101	8427238100715	294	
N2240.4 PL	2CLA224040N1301	8427238100739	294	
N2241.4 AN	2CLA224140N1801	8427238100821	294	
N2241.4 BL	2CLA224140N1101	8427238100814	294	
N2241.4 PL	2CLA224140N1301	8427238100838	294	
N2271 AN	2CLA227100N1802	8427238111896	295	
N2271 BL	2CLA227100N1102	8427238111902	295	
N2271 CB	2CLA227100N3002	8427238111919	295	
N2271 CC	2CLA227100N3702	8427238115443	295	

Selection Table According to Type

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
N2271 CF	2CLA227100N3802	8427238115450		295	N2371.9V	2CLA237190N1002	8427238106748		299
N2271 CH	2CLA227100N3902	8427238115474		295	N2372.1 AN	2CLA237210N1802	8427238106762		299
N2271 CN	2CLA227100N3102	8427238111926		295	N2372.1 BL	2CLA237210N1102	8427238101972		299
N2271 CP	2CLA227100N3502	8427238115436		295	N2372.1 CB	2CLA237200N3002	8427238106809		299
N2271 CV	2CLA227100N1902	8427238111933		295	N2372.1 CN	2CLA237200N3102	8427238106816		299
N2271 OX	2CLA227100N4002	8427238111940		295	N2372.1 CV	2CLA237210N1902	8427238106779		299
N2271 PZ	2CLA227100N2202	8427238111964		295	N2372.1 OX	2CLA237200N4002	8427238106823		299
N2271 WG	2CLA227100N2102	8427238111971		295	N2372.1 PL	2CLA237210N1302	8427238106755		299
N2271.1 AN	2CLA227110N1802	8427238111988		295	N2372.1 PZ	2CLA237200N2202	8427238106793		299
N2271.1 BL	2CLA227110N1102	8427238111995		295	NTI/Z 28.30.1	2CDG110096R0011	4016779663168	26	11
N2271.1 CV	2CLA227110N1902	8427238112008		295	NTU/S 12.2000.1	2CDG110070R0011	4016779681179	26	12
N2271.1 PL	2CLA227110N1302	8427238112015		295	PEB/U2.0.1-001	2TAZ730200R0010	6957625315924		171
N2272 AN	2CLA227200N1802	8427238112046		296	PEB/U2.0.1-002	2TAZ730200R0020	6957625315917		171
N2272 BL	2CLA227200N1102	8427238112053		296	PEB/U2.0.1-131	2TAZ730200R1310	6957625315948		171
N2272 CB	2CLA227200N3002	8427238112060		296	PEB/U2.0.1-151	2TAZ730200R1510	6957625315955		171
N2272 CC	2CLA227200N3702	8427238115498		296	PEB/U2.0.1-201	2TAZ730200R2010	6957625315931		171
N2272 CF	2CLA227200N3802	8427238115504		296	PEB/U2.0.1-411	2TAZ730200R4110	6957625315962		171
N2272 CH	2CLA227200N3902	8427238115511		296	PEB/U3.0.1-001	2TAZ730300R0010	6957625315986		171
N2272 CN	2CLA227200N3102	8427238112077		296	PEB/U3.0.1-002	2TAZ730300R0020	6957625315979		171
N2272 CP	2CLA227200N3502	8427238115481		296	PEB/U3.0.1-131	2TAZ730300R1310	6957625316006		171
N2272 CV	2CLA227200N1902	8427238112084		296	PEB/U3.0.1-151	2TAZ730300R1510	6957625316013		171
N2272 OX	2CLA227200N4002	8427238112091		296	PEB/U3.0.1-201	2TAZ730300R2010	6957625315993		171
N2272 PL	2CLA227200N1302	8427238112107		296	PEB/U3.0.1-411	2TAZ730300R4110	6957625316020		171
N2272 PZ	2CLA227200N2202	8427238112114		296	PEB/U5.0.1-001	2TAZ730500R0010	6957625316044		172
N2272 WG	2CLA227200N2102	8427238112121		296	PEB/U5.0.1-002	2TAZ730500R0020	6957625316037		172
N2272.1 AN	2CLA227210N1802	8427238112138		296	PEB/U5.0.1-131	2TAZ730500R1310	6957625316068		172
N2272.1 BL	2CLA227210N1102	8427238112145		296	PEB/U5.0.1-151	2TAZ730500R1510	6957625316075		172
N2272.1 CV	2CLA227210N1902	8427238112152		296	PEB/U5.0.1-201	2TAZ730500R2010	6957625316051		172
N2272.1 PL	2CLA227210N1302	8427238112169		296	PEB/U5.0.1-411	2TAZ730500R4110	6957625316082		172
N2273 AN	2CLA227300N1802	8427238112183		297	PEBR/U2.0.1-001	2TAZ730210R0010	6957625316105		168
N2273 BL	2CLA227300N1102	8427238112190		297	PEBR/U2.0.1-002	2TAZ730210R0020	6957625316099		168
N2273 CB	2CLA227300N3002	8427238112206		297	PEBR/U2.0.1-131	2TAZ730210R1310	6957625316129		168
N2273 CC	2CLA227300N3702	8427238115535		297	PEBR/U2.0.1-151	2TAZ730210R1510	6957625316136		168
N2273 CF	2CLA227300N3802	8427238115542		297	PEBR/U2.0.1-201	2TAZ730210R2010	6957625316112		168
N2273 CH	2CLA227300N3902	8427238115559		297	PEBR/U2.0.1-411	2TAZ730210R4110	6957625316143		168
N2273 CN	2CLA227300N3102	8427238112213		297	PEBR/U3.0.1-001	2TAZ730310R0010	6957625316167		169
N2273 CP	2CLA227300N3502	8427238115528		297	PEBR/U3.0.1-002	2TAZ730310R0020	6957625316150		169
N2273 CV	2CLA227300N1902	8427238112220		297	PEBR/U3.0.1-131	2TAZ730310R1310	6957625316181		169
N2273 OX	2CLA227300N4002	8427238112237		297	PEBR/U3.0.1-151	2TAZ730310R1510	6957625316198		169
N2273 PL	2CLA227300N1302	8427238112244		297	PEBR/U3.0.1-201	2TAZ730310R2010	6957625316174		169
N2273 PZ	2CLA227300N2202	8427238112251		297	PEBR/U3.0.1-411	2TAZ730310R4110	6957625316204		169
N2273 WG	2CLA227300N2102	8427238112268		297	PEBR/U5.0.1-001	2TAZ730510R0010	6957625316228		170
N2273.1 AN	2CLA227310N1802	8427238112275		297	PEBR/U5.0.1-002	2TAZ730510R0020	6957625316211		170
N2273.1 BL	2CLA227310N1102	8427238112282		297	PEBR/U5.0.1-131	2TAZ730510R1310	6957625316242		170
N2273.1 CV	2CLA227310N1902	8427238112299		297	PEBR/U5.0.1-151	2TAZ730510R1510	6957625316259		170
N2273.1 PL	2CLA227310N1302	8427238112305		297	PEBR/U5.0.1-201	2TAZ730510R2010	6957625316235		170
N2274 AN	2CLA227400N1802	8427238112312		298	PEBR/U5.0.1-411	2TAZ730510R4110	6957625316266		170
N2274 BL	2CLA227400N1102	8427238112329		298	PESB/2.10.1-001	2TAZ730000R0011	6957625316853		172
N2274 CB	2CLA227400N3002	8427238112336		298	PESB/2.10.1-002	2TAZ730000R0021	6957625316822		172
N2274 CC	2CLA227400N3702	8427238115573		298	PESB/2.10.1-131	2TAZ730000R1311	6957625316914		172
N2274 CF	2CLA227400N3802	8427238115580		298	PESB/2.10.1-151	2TAZ730000R1511	6957625316945		172
N2274 CH	2CLA227400N3902	8427238115597		298	PESB/2.10.1-201	2TAZ730000R2011	6957625316884		172
N2274 CN	2CLA227400N3102	8427238112343		298	PESB/2.10.1-411	2TAZ730000R4111	6957625316976		172
N2274 CP	2CLA227400N3502	8427238115566		298	PESB/235.10.1-001	2TAZ730010R0011	6957625316846		177
N2274 CV	2CLA227400N1902	8427238112350		298	PESB/235.10.1-002	2TAZ730010R0021	6957625316815		177
N2274 OX	2CLA227400N4002	8427238112367		298	PESB/235.10.1-131	2TAZ730010R1311	6957625316907		177
N2274 PL	2CLA227400N1302	8427238112374		298	PESB/235.10.1-151	2TAZ730010R1511	6957625316938		177
N2274 PZ	2CLA227400N2202	8427238112381		298	PESB/235.10.1-201	2TAZ730010R2011	6957625316877		177
N2274 WG	2CLA227400N2102	8427238112398		298	PESB/235.10.1-411	2TAZ730010R4111	6957625316969		177
N2274.1 AN	2CLA227410N1802	8427238112404		298	PESB/35.10.1-001	2TAZ730001R0011	6957625316860		175
N2274.1 BL	2CLA227410N1102	8427238112411		298	PESB/35.10.1-002	2TAZ730001R0021	6957625316839		175
N2274.1 CV	2CLA227410N1902	8427238112428		298	PESB/35.10.1-131	2TAZ730001R1311	6957625316921		175
N2274.1 PL	2CLA227410N1302	8427238112435		298	PESB/35.10.1-151	2TAZ730001R1511	6957625316952		175

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
PESB/35.10.1-201	2TAZ730001R2011	6957625316891		175	PESR/235.10.1-002	2TAZ730010R0022	6957625316990		178
PESB/35.10.1-411	2TAZ730001R4111	6957625316983		175	PESR/235.10.1-131	2TAZ730010R1312	6957625317089		178
PESD/2.10.1-001	2TAZ730000R0014	6957625317393		173	PESR/235.10.1-151	2TAZ730010R1512	6957625317119		178
PESD/2.10.1-002	2TAZ730000R0024	6957625317362		173	PESR/235.10.1-201	2TAZ730010R2012	6957625317058		178
PESD/2.10.1-131	2TAZ730000R1314	6957625317454		173	PESR/235.10.1-411	2TAZ730010R4112	6957625317140		178
PESD/2.10.1-151	2TAZ730000R1514	6957625317485		173	PESR/35.10.1-001	2TAZ730001R0012	6957625317041		176
PESD/2.10.1-201	2TAZ730000R2014	6957625317423		173	PESR/35.10.1-002	2TAZ730001R0022	6957625317010		176
PESD/2.10.1-411	2TAZ730000R4114	6957625317515		173	PESR/35.10.1-131	2TAZ730001R1312	6957625317102		176
PESD/235.10.1-001	2TAZ730010R0014	6957625317386		177	PESR/35.10.1-151	2TAZ730001R1512	6957625317133		176
PESD/235.10.1-002	2TAZ730010R0024	6957625317355		177	PESR/35.10.1-201	2TAZ730001R2012	6957625317072		176
PESD/235.10.1-131	2TAZ730001R1314	6957625317447		177	PESR/35.10.1-411	2TAZ730001R4112	6957625317164		176
PESD/235.10.1-151	2TAZ730010R1514	6957625317478		177	PESX/2.10.1-001	2TAZ730000R0010	6957625316679		172
PESD/235.10.1-201	2TAZ730010R2014	6957625317416		177	PESX/2.10.1-002	2TAZ730000R0020	6957625316648		172
PESD/235.10.1-411	2TAZ730010R4114	6957625317508		177	PESX/2.10.1-131	2TAZ730000R1310	6957625316730		172
PESD/35.10.1-001	2TAZ730001R0014	6957625317409		175	PESX/2.10.1-151	2TAZ730000R1510	6957625316761		172
PESD/35.10.1-002	2TAZ730001R0024	6957625317379		175	PESX/2.10.1-201	2TAZ730000R2010	6957625316709		172
PESD/35.10.1-131	2TAZ730001R1314	6957625317461		175	PESX/2.10.1-411	2TAZ730001R4110	6957625316792		172
PESD/35.10.1-151	2TAZ730001R1514	6957625317492		175	PESX/235.10.1-001	2TAZ730010R0010	6957625316662		177
PESD/35.10.1-201	2TAZ730001R2014	6957625317430		175	PESX/235.10.1-002	2TAZ730010R0020	6957625316631		177
PESD/35.10.1-411	2TAZ730001R4114	6957625317522		175	PESX/235.10.1-131	2TAZ730010R1310	6957625316723		177
PESF/2.10.1-001	2TAZ730000R0015	6957625317577		174	PESX/235.10.1-151	2TAZ730010R1510	6957625316754		177
PESF/2.10.1-002	2TAZ730000R0025	6957625317546		174	PESX/235.10.1-201	2TAZ730010R2010	6957625316693		177
PESF/2.10.1-131	2TAZ730000R1315	6957625317638		174	PESX/235.10.1-411	2TAZ730010R4110	6957625316785		177
PESF/2.10.1-151	2TAZ730000R1515	6957625317669		174	PESX/35.10.1-001	2TAZ730001R0010	6957625316686		174
PESF/2.10.1-201	2TAZ730000R2015	6957625317607		174	PESX/35.10.1-002	2TAZ730001R0020	6957625316655		174
PESF/2.10.1-411	2TAZ730000R4115	6957625317690		174	PESX/35.10.1-131	2TAZ730001R1310	6957625316747		174
PESF/235.10.1-001	2TAZ730010R0015	6957625317560		178	PESX/35.10.1-151	2TAZ730001R1510	6957625316778		174
PESF/235.10.1-002	2TAZ730010R0025	6957625317539		178	PESX/35.10.1-201	2TAZ730001R2010	6957625316716		174
PESF/235.10.1-131	2TAZ730001R1315	6957625317621		178	PESX/35.10.1-411	2TAZ730001R4110	6957625316808		174
PESF/235.10.1-151	2TAZ730010R1515	6957625317652		178	PESZ/2.10.1-001	2TAZ730000R0016	6957625317751		174
PESF/235.10.1-201	2TAZ730010R2015	6957625317591		178	PESZ/2.10.1-002	2TAZ730000R0026	6957625317720		174
PESF/235.10.1-411	2TAZ730010R4115	6957625317683		178	PESZ/2.10.1-131	2TAZ730000R1316	6957625317812		174
PESF/35.10.1-001	2TAZ730001R0015	6957625317584		176	PESZ/2.10.1-151	2TAZ730000R1516	6957625317843		174
PESF/35.10.1-002	2TAZ730001R0025	6957625317553		176	PESZ/2.10.1-201	2TAZ730000R2016	6957625317782		174
PESF/35.10.1-131	2TAZ730001R1315	6957625317645		176	PESZ/2.10.1-411	2TAZ730000R4116	6957625317874		174
PESF/35.10.1-151	2TAZ730001R1515	6957625317676		176	PESZ/235.10.1-001	2TAZ730010R0016	6957625317744		179
PESF/35.10.1-201	2TAZ730001R2015	6957625317614		176	PESZ/235.10.1-002	2TAZ730010R0026	6957625317713		179
PESF/35.10.1-411	2TAZ730001R4115	6957625317706		176	PESZ/235.10.1-131	2TAZ730010R1316	6957625317805		179
PESJ/2.10.1-001	2TAZ730000R0013	6957625317218		173	PESZ/235.10.1-151	2TAZ730010R1516	6957625317836		179
PESJ/2.10.1-002	2TAZ730000R0023	6957625317188		173	PESZ/235.10.1-201	2TAZ730010R2016	6957625317775		179
PESJ/2.10.1-131	2TAZ730000R1313	6957625317270		173	PESZ/235.10.1-411	2TAZ730010R4116	6957625317867		179
PESJ/2.10.1-151	2TAZ730000R1513	6957625317300		173	PESZ/35.10.1-001	2TAZ730001R0016	6957625317768		176
PESJ/2.10.1-201	2TAZ730000R2013	6957625317249		173	PESZ/35.10.1-002	2TAZ730001R0026	6957625317737		176
PESJ/2.10.1-411	2TAZ730000R4113	6957625317331		173	PESZ/35.10.1-131	2TAZ730001R1316	6957625317829		176
PESJ/235.10.1-001	2TAZ730010R0013	6957625317201		178	PESZ/35.10.1-151	2TAZ730001R1516	6957625317850		176
PESJ/235.10.1-002	2TAZ730010R0023	6957625317171		178	PESZ/35.10.1-201	2TAZ730001R2016	6957625317799		176
PESJ/235.10.1-131	2TAZ730001R1313	6957625317263		178	PESZ/35.10.1-411	2TAZ730001R4116	6957625317881		176
PESJ/235.10.1-151	2TAZ730010R1513	6957625317294		178	PK/E 2.1	2CDG120043R0011	4016779906715	20	115
PESJ/235.10.1-201	2TAZ730010R2013	6957625317232		178	PM5630-2ETH	1SAP131000R0278	4013614508998		108
PESJ/235.10.1-411	2TAZ730010R4113	6957625317324		178	PMA/A1.1-884	2TYZ510000G0602	6925897543888		75
PESJ/35.10.1-001	2TAZ730001R0013	6957625317225		175	PMA/A1.1-885	2TYZ510000G0702	6925897543970		75
PESJ/35.10.1-002	2TAZ730001R0023	6957625317195		175	PMA/K1.1-884	2TYZ510000G0601	6925897543871		75
PESJ/35.10.1-131	2TAZ730001R1313	6957625317287		175	PMA/K1.1-885	2TYZ510000G0701	6925897543963		75
PESJ/35.10.1-151	2TAZ730001R1513	6957625317317		175	PMA/K2.1-884	2TYZ510000G0603	6925897543864		74
PESJ/35.10.1-201	2TAZ730001R2013	6957625317256		175	PMA/K2.1-885	2TYZ510000G0703	6925897543956		74
PESJ/35.10.1-411	2TAZ730001R4113	6957625317348		175	PMB/U1.1-916	2CKA006132A0462	4011395362761		76
PESR/2.10.1-001	2TAZ730000R0012	6957625317034		173	PMB/U2.1-916	2CKA006132A0464	4011395362785		77
PESR/2.10.1-002	2TAZ730000R0022	6957625317003		173	PMB/U3.1-916	2CKA006132A0466	4011395362808		78
PESR/2.10.1-131	2TAZ730000R1312	6957625317096		173	PMH/U2.1.1-884	2TYZ510202G0601	6925897543833		74
PESR/2.10.1-151	2TAZ730000R1512	6957625317126		173	PMH/U2.1.1-885	2TYZ510202G0701	6925897543925		74
PESR/2.10.1-201	2TAZ730000R2012	6957625317065		173	PMH/U4.5.1-884	2TYZ510212G0601	6925897543840		74
PESR/2.10.1-411	2TAZ730000R4112	6957625317157		173	PMH/U4.5.1-885	2TYZ510212G0701	6925897543932		74
PESR/235.10.1-001	2TAZ730010R0012	6957625317027		178	PS 1/4/6-KNX	2CDG924003R0011	4016779667586	20	19

Selection Table According to Type

Type	Oder code	EAN	PG	Page
PS 1/60/6-KNX	2CDG924004R0011	4016779667593	20	19
PS/E 2.2	2CDG120071R0011	4013614556548	20	114
PS5604-KNX	1SAP195800R0101	4013614536946		108
PS-END 1-S	2CDL000001R0001	4016779666985		19
QA/S 3.16.1	2CDG110226R0011	4016779997751	26	135
QA/S 3.64.1	2CDG110227R0011	4016779997768	26	135
RA/U 1.16.1	2CSY249580R1103	8012542149057		301
RA/U 2.8.1	2CSY242150R1106	8012542149354		301
RB/U 1.1	2CSY247240R1105	8012542149255		302
RC/A 4.2	2CDG110104R0011	4016779676472	26	25
RC/A 8.2	2CDG110106R0011	4016779681261	26	25
RM/S 1.1	2CDG110094R0011	4016779665568	26	29
RM/S 2.1	2CDG110095R0011	4016779665674	26	29
RM/S 3.1	2CDG110165R0011	4016779881067	26	29
RM/S 4.1	2CDG110170R0011	4016779881265	26	29
RS/U 1.1	2CSY244490R1012	8012542574521		301
RS/U 2.1	2CSY247450R1003	8012542563624		301
RT/U 1.1.ZA	2CSY249370R1202	8012542149859		307
RT/U 1.1.ZC	2CSY247370R1202	8012542149859		307
RT/U 1.1.ZS	2CSY242280R1202	8012542149859		307
RT/U 1.1.ZW	2CSY244280R1202	8012542149859		307
RT/U 30.0.1-811	2TMA200050W0007	6955891816183	26	118
RT/U 30.0.1-825	2TMA200050B0005	6955891816190	26	118
RT/U12.86.1-811	2TMA310011W0001	6955891820036		117
RT/U12.86.1-825	2TMA310011B0003	6955891820029		117
SA/M 2.16.1	2CDG110100R0011	4016779681582	26	26
SA/M 2.6.1	2CDG110002R0011	4016779583145	26	26
SA/S 12.10.2.2	2CDG110260R0011	4016779066617	26	43
SA/S 12.16.2.2	2CDG110264R0011	4016779066693	26	43
SA/S 12.16.5.2	2CDG110268R0011	4016779066518	26	44
SA/S 12.16.6.2	2CDG110272R0011	4016779066532	26	44
SA/S 12.6.2.2	2CDG110256R0011	4016779066778	26	43
SA/S 2.10.2.2	2CDG110257R0011	4016779066556	26	43
SA/S 2.16.2.2	2CDG110261R0011	4016779066631	26	43
SA/S 2.16.5.2	2CDG110265R0011	4016779066457	26	44
SA/S 2.16.6.2	2CDG110269R0011	4016779066327	26	44
SA/S 2.6.2.2	2CDG110253R0011	4016779066716	26	43
SA/S 4.10.2.2	2CDG110258R0011	4016779066570	26	43
SA/S 4.16.2.2	2CDG110262R0011	4016779066655	26	43
SA/S 4.16.5.2	2CDG110266R0011	4016779066471	26	44
SA/S 4.16.6.2	2CDG110270R0011	4016779066419	26	44
SA/S 4.6.2.2	2CDG110254R0011	4016779066730	26	43
SA/S 8.10.2.2	2CDG110259R0011	4016779066594	26	43
SA/S 8.16.2.2	2CDG110263R0011	4016779066679	26	43
SA/S 8.16.5.2	2CDG110267R0011	4016779066495	26	44
SA/S 8.16.6.2	2CDG110271R0011	4016779066433	26	44
SA/S 8.6.2.2	2CDG110255R0011	4016779066754	26	43
SA/U 1.16.2	2CKA006151A0280	4011395309865	26	45
SAB/A.0.1-83	2CKA006330A0092	4011395299371	26	218
SAB/A.0.1-84	2CKA006330A0020	4011395255506	26	218
SAB/A.0.1-884	2CKA006330A0090	4011395299357	26	218
SAB/A.0.1-885	2CKA006330A0091	4011395299364	26	218
SAB/A.0.2-84	2CKA006330A0759	4011395365946		214
SAB/A.0.2-885	2CKA006330A0760	4011395365953		214
SAF/A 1.0.1-24	2CKA006134A0348	4011395252116	26	104
SAH/S 16.10.7.1	2CDG110248R0011	4016779066822	26	42
SAH/S 16.16.7.1	2CDG110251R0011	4016779066853	26	42
SAH/S 16.6.7.1	2CDG110245R0011	4016779066792	26	42
SAH/S 24.10.7.1	2CDG110249R0011	4016779066839	26	42
SAH/S 24.16.7.1	2CDG110252R0011	4016779066860	26	42
SAH/S 24.6.7.1	2CDG110246R0011	4013614552540	26	42
SAH/S 8.10.7.1	2CDG110247R0011	4016779066815	26	42
SAH/S 8.16.7.1	2CDG110250R0011	4016779066846	26	42
SAH/S 8.6.7.1	2CDG110244R0011	4016779066310	26	42
SAH/U 2.16.2	2CKA006152A0042	4011395309889	26	45
SAM/A.0.2-84	2CKA006330A0203	4011395356609		214
SAM/A.0.2-885	2CKA006330A0206	4011395356630		214
SAR/A 1.0.1-24	2CKA006134A0346	4011395252093	26	104
SAS/A.0.1-83	2CKA006330A0086	4011395299319	26	218
SAS/A.0.1-84	2CKA006330A0018	4011395255483	26	218
SAS/A.0.1-884	2CKA006330A0084	4011395299296	26	218
SAS/A.0.1-885	2CKA006330A0085	4011395299302	26	218
SAS/A.0.2-84	2CKA006330A0755	4011395365977		214
SAS/A.0.2-885	2CKA006330A0756	4011395365915		214
SB/U12.0.1-83	2CKA006330A0080	4011395299159	26	218
SB/U12.0.1-84	2CKA006330A0016	4011395255469	26	218
SB/U12.0.1-884	2CKA006330A0078	4011395299135	26	218
SB/U12.0.1-885	2CKA006330A0079	4011395299142	26	218
SB/U12.0.2-83	2CKA006330A0270	4011395357279		209
SB/U12.0.2-84	2CKA006330A0267	4011395357248		209
SB/U12.0.2-884	2CKA006330A0268	4011395357255		209
SB/U12.0.2-885	2CKA006330A0269	4011395357262		209
SB/U2.0.2-83	2CKA006330A0165			208
SB/U2.0.2-84	2CKA006330A0163	4011395356203		208
SB/U2.0.2-884	2CKA006330A0164			208
SB/U2.0.2-885	2CKA006330A0166			208
SB/U4.0.2-83	2CKA006330A0173	4011395356302		208
SB/U4.0.2-84	2CKA006330A0171	4011395356289		208
SB/U4.0.2-884	2CKA006330A0172	4011395356296		208
SB/U4.0.2-885	2CKA006330A0174	4011395356319		208
SB/U6.0.2-83	2CKA006330A0181	4011395356388		208
SB/U6.0.2-84	2CKA006330A0179	4011395356364		208
SB/U6.0.2-884	2CKA006330A0180	4011395356371		208
SB/U6.0.2-885	2CKA006330A0182	4011395356395		208
SB/U8.0.1-83	2CKA006330A0074	4011395299098	26	218
SB/U8.0.1-84	2CKA006330A0014	4011395255247	26	218
SB/U8.0.1-884	2CKA006330A0072	4011395299067	26	218
SB/U8.0.1-885	2CKA006330A0073	4011395299081	26	218
SB/U8.0.2-83	2CKA006330A0262	4011395357194		209
SB/U8.0.2-84	2CKA006330A0259	4011395357163		209
SB/U8.0.2-884	2CKA006330A0260	4011395357170		209
SB/U8.0.2-885	2CKA006330A0261	4011395357187		209
SBC/U10.0.1-83	2CKA006330A0068	4011395299029	26	217
SBC/U10.0.1-84	2CKA006330A0012	4011395255216	26	217
SBC/U10.0.1-884	2CKA006330A0066	4011395299005	26	217
SBC/U10.0.1-885	2CKA006330A0067	4011395299012	26	217
SBC/U6.0.1-83	2CKA006330A0062	4011395298961	26	217
SBC/U6.0.1-84	2CKA006330A0010	4011395255193	26	217
SBC/U6.0.1-884	2CKA006330A0060	4011395298947	26	217
SBC/U6.0.1-885	2CKA006330A0061	4011395298954	26	217
SBOC/U12.0.2-83	2CKA006330A0197	4011395356548		210
SBOC/U12.0.2-84	2CKA006330A0195	4011395356524		210
SBOC/U12.0.2-884	2CKA006330A0196	4011395356531		210
SBOC/U12.0.2-885	2CKA006330A0198	4011395356555		210
SBOC/U6.0.2-83	2CKA006330A0189	4011395356463		209
SBOC/U6.0.2-84	2CKA006330A0187	4011395356449		209
SBOC/U6.0.2-884	2CKA006330A0188	4011395356456		209
SBOC/U6.0.2-885	2CKA006330A0190	4011395356470		209
SBR/U10.0.1-83	2CKA006330A0056	4011395298909	26	217
SBR/U10.0.1-84	2CKA006330A0008	4011395255179	26	217
SBR/U10.0.1-884	2CKA006330A0054	4011395298886	26	217
SBR/U10.0.1-885	2CKA006330A0055	4011395298893	26	217
SBR/U10.0.2-83	2CKA006330A0238	4011395356951		212
SBR/U10.0.2-84	2CKA006330A0235	4011395356920		212
SBR/U10.0.2-884	2CKA006330A0236	4011395356937		212
SBR/U10.0.2-885	2CKA006330A0237	4011395356944		212

Type	Oder code	EAN	PG	Page
SBR/U6.0.1-83	2CKA006330A0044	4011395298787	26	216
SBR/U6.0.1-84	2CKA006330A0004	4011395255667	26	216
SBR/U6.0.1-884	2CKA006330A0042	4011395298763	26	216
SBR/U6.0.1-885	2CKA006330A0043	4011395298770	26	216
SBR/U6.0.2-83	2CKA006330A0222	4011395356791	211	
SBR/U6.0.2-84	2CKA006330A0219	4011395356760	211	
SBR/U6.0.2-884	2CKA006330A0220	4011395356777	211	
SBR/U6.0.2-885	2CKA006330A0221	4011395356784	211	
SBRC/U10.0.1-83	2CKA006330A0254	4011395364451	213	
SBRC/U10.0.1-84	2CKA006330A0251	4011395357088	213	
SBRC/U10.0.1-884	2CKA006330A0252	4011395357095	213	
SBRC/U10.0.1-885	2CKA006330A0253	4011395364444	213	
SBRC/U6.0.1-83	2CKA006330A0246	4011395357033	212	
SBRC/U6.0.1-84	2CKA006330A0243	4011395357002	212	
SBRC/U6.0.1-884	2CKA006330A0244	4011395357019	212	
SBRC/U6.0.1-885	2CKA006330A0245	4011395357026	212	
SBS/U10.0.1-83	2CKA006330A0050	4011395298848	26	216
SBS/U10.0.1-84	2CKA006330A0006	4011395255124	26	216
SBS/U10.0.1-884	2CKA006330A0048	4011395298824	26	216
SBS/U10.0.1-885	2CKA006330A0049	4011395298831	26	216
SBS/U10.0.2-83	2CKA006330A0230	4011395356876	211	
SBS/U10.0.2-84	2CKA006330A0227	4011395356845	211	
SBS/U10.0.2-884	2CKA006330A0228	4011395356852	211	
SBS/U10.0.2-885	2CKA006330A0229	4011395356869	211	
SBS/U6.0.1-83	2CKA006330A0038	4011395298725	26	216
SBS/U6.0.1-84	2CKA006330A0002	4011395255087	26	216
SBS/U6.0.1-884	2CKA006330A0036	4011395298701	26	216
SBS/U6.0.1-885	2CKA006330A0037	4011395298718	26	216
SBS/U6.0.2-83	2CKA006330A0214	4011395356715	210	
SBS/U6.0.2-84	2CKA006330A0211	4011395356685	210	
SBS/U6.0.2-884	2CKA006330A0212	4011395356692	210	
SBS/U6.0.2-885	2CKA006330A0213	4011395356708	210	
SCM/S 1.1	2CDG110024R0011	4016779583916	26	139
SD/M 2.6.2	2CDG110107R0011	4016779680660	26	26
SD/S 2.16.1	2CDG110079R0011	4016779659963	26	63
SD/S 4.16.1	2CDG110080R0011	4016779659376	26	63
SD/S 8.16.1	2CDG110081R0011	4016779659185	26	63
SD/U12.55.1-825	2TMA310011B0001	6955891820005	26	222
SD/U12.55.1-825	2TMA310011B0001	6955891820005	26	241
SD/U12.63.1-825	2TMA310011B0002	6955891820012	26	227
SD/U12.701-4015	2TMA310011B0004	6955891820043	26	235
SE/S 3.16.1	2CDG110136R0011	4016779709774	26	134
SJR/S 4.24.2.1	2CDG110143R0011	4016779864466	26	51
SLB/A.0.1-83	2CKA006330A0115	4011395299609	26	219
SLB/A.0.1-84	2CKA006330A0026	4011395255568	26	219
SLB/A.0.1-884	2CKA006330A0113	4011395299586	26	219
SLB/A.0.1-885	2CKA006330A0114	4011395299593	26	219
SLB/A.0.2-83	2CKA006330A0744	4011395365793	215	
SLB/A.0.2-84	2CKA006330A0741	4011395365762	215	
SLB/A.0.2-884	2CKA006330A0742	4011395365779	215	
SLB/A.0.2-885	2CKA006330A0743	4011395365786	215	
SLM/A.0.1-83	2CKA006330A0107	4011395299524	26	219
SLM/A.0.1-84	2CKA006330A0024	4011395255544	26	219
SLM/A.0.1-884	2CKA006330A0105	4011395299500	26	219
SLM/A.0.1-885	2CKA006330A0106	4011395299517	26	219
SLM/A.0.2-83	2CKA006330A0736	4011395365717	215	
SLM/A.0.2-84	2CKA006330A0733	4011395365687	215	
SLM/A.0.2-884	2CKA006330A0734	4011395365694	215	
SLM/A.0.2-885	2CKA006330A0735	4011395365960	215	
SLS/A.0.1-83	2CKA006330A0099	4011395299449	26	219
SLS/A.0.1-84	2CKA006330A0022	4011395255520	26	219
SLS/A.0.1-884	2CKA006330A0097	4011395299425	26	219
SLS/A.0.1-885	2CKA006330A0098	4011395299432	26	219

Type	Oder code	EAN	PG	Page
SLS/A.0.2-83	2CKA006330A0728	4011395365632	214	
SLS/A.0.2-84	2CKA006330A0725	4011395365601	214	
SLS/A.0.2-884	2CKA006330A0726	4011395365618	214	
SLS/A.0.2-885	2CKA006330A0727	4011395365625	214	
SLX/A.0.1-83	2CKA006330A0123	4011395299685	26	220
SLX/A.0.1-84	2CKA006330A0028	4011395255582	26	220
SLX/A.0.1-884	2CKA006330A0121	4011395299661	26	220
SLX/A.0.1-885	2CKA006330A0122	4011395299678	26	220
SLX/A.0.2-83	2CKA006330A0752	4011395365878	215	
SLX/A.0.2-84	2CKA006330A0749	4011395365847	215	
SLX/A.0.2-884	2CKA006330A0750	4011395365854	215	
SLX/A.0.2-885	2CKA006330A0751	4011395365861	215	
SLY/A.0.1-83	2CKA006330A0131	4011395299760	26	220
SLY/A.0.1-84	2CKA006330A0030	4011395264973	26	220
SLY/A.0.1-884	2CKA006330A0129	4011395299746	26	220
SLY/A.0.1-885	2CKA006330A0130	4011395299753	26	220
SMB/S 1.1	GHQ6310085R0111	4016779580922	26	136
SPD/S 1.1	7TCA085400R0448	5415022475500		19
SPGS/W	GHV9220004V0009	4013232614200	50	140
SR-1-212	2CKA006220A0182	4011395180747	24	268
SR-1-214	2CKA006220A0183	4011395181133	24	268
SR-1-803	2CKA006220A0550	4011395203866	24	268
SR-1-81	2CKA006220A0137	4011395181492	24	268
SR-1-81	2CKA006220A0137	4011395181492	24	268
SR-1-81	2CKA006220A0137	4011395181492	24	268
SR-1-82	2CKA006220A0516	4011395203453	24	268
SR-1-82	2CKA006220A0516	4011395203453	24	268
SR-1-82	2CKA006220A0516	4011395203453	24	268
SR-1-82	2CKA006220A0516	4011395203453	24	268
SR-1-83	2CKA006220A0138	4011395182178	24	268
SR-1-84	2CKA006220A0139	4011395181836	24	268
SR-1-84	2CKA006220A0139	4011395181836	24	268
SR-1-84	2CKA006220A0139	4011395181836	24	268
SR-1-84	2CKA006220A0139	4011395181836	24	268
SR-1-84	2CKA006220A0139	4011395181836	24	268
SR-1-840	2CKA006220A0371	4011395195598	24	268
SR-1-866	2CKA006220A0533	4011395203699	24	268
SR-1-884	2CKA006220A0601	4011395204337	24	268
SR-1-885	2CKA006220A0618	4011395204511	24	268
SR-2-212	2CKA006220A0192	4011395180792	24	273
SR-2-214	2CKA006220A0193	4011395181195	24	273
SR-2-803	2CKA006220A0555	4011395203927	24	273
SR-2-81	2CKA006220A0152	4011395181553	24	273
SR-2-81	2CKA006220A0152	4011395181553	24	273
SR-2-82	2CKA006220A0521	4011395203507	24	273
SR-2-82	2CKA006220A0521	4011395203507	24	273
SR-2-82	2CKA006220A0521	4011395203507	24	273
SR-2-83	2CKA006220A0153	4011395182239	24	273
SR-2-84	2CKA006220A0154	4011395181881	24	273
SR-2-84	2CKA006220A0154	4011395181881	24	273
SR-2-84	2CKA006220A0154	4011395181881	24	273
SR-2-84	2CKA006220A0154	4011395181881	24	273
SR-2-866	2CKA006220A0538	4011395203750	24	273
SR-2-884	2CKA006220A0606	4011395204399	24	273
SR-2-885	2CKA006220A0623	4011395204566	24	273
SRB-1-212	2CKA006220A0186	4011395180761	24	270
SRB-1-214	2CKA006220A0187	4011395181157	24	270
SRB-1-803	2CKA006220A0552	4011395203880	24	270
SRB-1-81	2CKA006220A0143	4011395181522	24	270
SRB-1-81	2CKA006220A0143	4011395181522	24	270
SRB-1-81	2CKA006220A0143	4011395181522	24	270
SRB-1-82	2CKA006220A0518	4011395203477	24	270
SRB-1-82	2CKA006220A0518	4011395203477	24	270
SRB-1-82	2CKA006220A0518	4011395203477	24	270

Selection Table According to Type

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
SRB-1-82	2CKA006220A0518	4011395203477	24	270	SRD-2-L-840	2CKA006220A0380	4011395195680	24	276
SRB-1-83	2CKA006220A0144	4011395182192	24	270	SRD-2-L-866	2CKA006220A0542	4011395203798	24	276
SRB-1-84	2CKA006220A0145	4011395181850	24	270	SRD-2-L-884	2CKA006220A0610	4011395204443	24	276
SRB-1-84	2CKA006220A0145	4011395181850	24	270	SRD-2-L-885	2CKA006220A0627	4011395204610	24	276
SRB-1-84	2CKA006220A0145	4011395181850	24	270	SRD-2-R-212	2CKA006220A0261	4011395188507	24	276
SRB-1-84	2CKA006220A0145	4011395181850	24	270	SRD-2-R-214	2CKA006220A0262	4011395188514	24	276
SRB-1-840	2CKA006220A0373	4011395195611	24	270	SRD-2-R-803	2CKA006220A0560	4011395203972	24	276
SRB-1-866	2CKA006220A0535	4011395203712	24	270	SRD-2-R-81	2CKA006220A0258	4011395188477	24	276
SRB-1-884	2CKA006220A0603	4011395204368	24	270	SRD-2-R-81	2CKA006220A0258	4011395188477	24	276
SRB-1-885	2CKA006220A0620	4011395204535	24	270	SRD-2-R-81	2CKA006220A0258	4011395188477	24	276
SRB-2-212	2CKA006220A0196	4011395180815	24	273	SRD-2-R-82	2CKA006220A0526	4011395203644	24	276
SRB-2-214	2CKA006220A0197	4011395181225	24	273	SRD-2-R-82	2CKA006220A0526	4011395203644	24	276
SRB-2-803	2CKA006220A0557	4011395203941	24	273	SRD-2-R-82	2CKA006220A0526	4011395203644	24	276
SRB-2-81	2CKA006220A0158	4011395181577	24	273	SRD-2-R-82	2CKA006220A0526	4011395203644	24	276
SRB-2-81	2CKA006220A0158	4011395181577	24	273	SRD-2-R-83	2CKA006220A0259	4011395188484	24	276
SRB-2-81	2CKA006220A0158	4011395181577	24	273	SRD-2-R-84	2CKA006220A0260	4011395188491	24	276
SRB-2-82	2CKA006220A0523	4011395203613	24	273	SRD-2-R-84	2CKA006220A0260	4011395188491	24	276
SRB-2-82	2CKA006220A0523	4011395203613	24	273	SRD-2-R-84	2CKA006220A0260	4011395188491	24	276
SRB-2-82	2CKA006220A0523	4011395203613	24	273	SRD-2-R-84	2CKA006220A0260	4011395188491	24	276
SRB-2-82	2CKA006220A0523	4011395203613	24	273	SRD-2-R-840	2CKA006220A0383	4011395195727	24	276
SRB-2-83	2CKA006220A0159	4011395182253	24	273	SRD-2-R-866	2CKA006220A0543	4011395203811	24	276
SRB-2-84	2CKA006220A0160	4011395181911	24	273	SRD-2-R-884	2CKA006220A0611	4011395204450	24	276
SRB-2-84	2CKA006220A0160	4011395181911	24	273	SRD-2-R-885	2CKA006220A0628	4011395204627	24	276
SRB-2-84	2CKA006220A0160	4011395181911	24	273	SRL-1-212	2CKA006220A0184	4011395180754	24	269
SRB-2-84	2CKA006220A0160	4011395181911	24	273	SRL-1-214	2CKA006220A0185	4011395181140	24	269
SRB-2-840	2CKA006220A0378	4011395195666	24	273	SRL-1-803	2CKA006220A0551	4011395203873	24	269
SRB-2-866	2CKA006220A0540	4011395203774	24	273	SRL-1-81	2CKA006220A0140	4011395181515	24	269
SRB-2-884	2CKA006220A0608	4011395204429	24	273	SRL-1-81	2CKA006220A0140	4011395181515	24	269
SRB-2-885	2CKA006220A0625	4011395204580	24	273	SRL-1-81	2CKA006220A0140	4011395181515	24	269
SRD-1-212	2CKA006220A0190	4011395180785	24	272	SRL-1-82	2CKA006220A0517	4011395203460	24	269
SRD-1-214	2CKA006220A0191	4011395181188	24	272	SRL-1-82	2CKA006220A0517	4011395203460	24	269
SRD-1-803	2CKA006220A0554	4011395203910	24	272	SRL-1-82	2CKA006220A0517	4011395203460	24	269
SRD-1-81	2CKA006220A0149	4011395181546	24	272	SRL-1-82	2CKA006220A0517	4011395203460	24	269
SRD-1-81	2CKA006220A0149	4011395181546	24	272	SRL-1-83	2CKA006220A0141	4011395182185	24	269
SRD-1-81	2CKA006220A0149	4011395181546	24	272	SRL-1-84	2CKA006220A0142	4011395181843	24	269
SRD-1-82	2CKA006220A0520	4011395203491	24	272	SRL-1-84	2CKA006220A0142	4011395181843	24	269
SRD-1-82	2CKA006220A0520	4011395203491	24	272	SRL-1-84	2CKA006220A0142	4011395181843	24	269
SRD-1-82	2CKA006220A0520	4011395203491	24	272	SRL-1-84	2CKA006220A0142	4011395181843	24	269
SRD-1-82	2CKA006220A0520	4011395203491	24	272	SRL-1-840	2CKA006220A0372	4011395195604	24	269
SRD-1-83	2CKA006220A0150	4011395182222	24	272	SRL-1-866	2CKA006220A0534	4011395203705	24	269
SRD-1-84	2CKA006220A0151	4011395181874	24	272	SRL-1-884	2CKA006220A0602	4011395204344	24	269
SRD-1-84	2CKA006220A0151	4011395181874	24	272	SRL-1-885	2CKA006220A0619	4011395204528	24	269
SRD-1-84	2CKA006220A0151	4011395181874	24	272	SRL-2-L-212	2CKA006220A0194	4011395180808	24	274
SRD-1-84	2CKA006220A0151	4011395181874	24	272	SRL-2-L-214	2CKA006220A0195	4011395181218	24	274
SRD-1-840	2CKA006220A0375	4011395195635	24	272	SRL-2-L-803	2CKA006220A0556	4011395203934	24	274
SRD-1-866	2CKA006220A0537	4011395203743	24	272	SRL-2-L-81	2CKA006220A0155	4011395181560	24	274
SRD-1-884	2CKA006220A0605	4011395204382	24	272	SRL-2-L-81	2CKA006220A0155	4011395181560	24	274
SRD-1-885	2CKA006220A0622	4011395204559	24	272	SRL-2-L-81	2CKA006220A0155	4011395181560	24	274
SRD-2-L-212	2CKA006220A0200	4011395180846	24	276	SRL-2-L-82	2CKA006220A0522	4011395203606	24	274
SRD-2-L-214	2CKA006220A0201	4011395181249	24	276	SRL-2-L-82	2CKA006220A0522	4011395203606	24	274
SRD-2-L-803	2CKA006220A0559	4011395203965	24	276	SRL-2-L-82	2CKA006220A0522	4011395203606	24	274
SRD-2-L-81	2CKA006220A0164	4011395181591	24	276	SRL-2-L-82	2CKA006220A0522	4011395203606	24	274
SRD-2-L-81	2CKA006220A0164	4011395181591	24	276	SRL-2-L-83	2CKA006220A0156	4011395182246	24	274
SRD-2-L-81	2CKA006220A0164	4011395181591	24	276	SRL-2-L-84	2CKA006220A0157	4011395181898	24	274
SRD-2-L-82	2CKA006220A0525	4011395203637	24	276	SRL-2-L-84	2CKA006220A0157	4011395181898	24	274
SRD-2-L-82	2CKA006220A0525	4011395203637	24	276	SRL-2-L-84	2CKA006220A0157	4011395181898	24	274
SRD-2-L-82	2CKA006220A0525	4011395203637	24	276	SRL-2-L-84	2CKA006220A0157	4011395181898	24	274
SRD-2-L-82	2CKA006220A0525	4011395203637	24	276	SRL-2-L-840	2CKA006220A0377	4011395195659	24	274
SRD-2-L-83	2CKA006220A0165	4011395182277	24	276	SRL-2-L-866	2CKA006220A0539	4011395203767	24	274
SRD-2-L-84	2CKA006220A0166	4011395181935	24	276	SRL-2-L-884	2CKA006220A0607	4011395204412	24	274
SRD-2-L-84	2CKA006220A0166	4011395181935	24	276	SRL-2-L-885	2CKA006220A0624	4011395204573	24	274
SRD-2-L-84	2CKA006220A0166	4011395181935	24	276	SRL-2-R-212	2CKA006220A0202	4011395180853	24	274
SRD-2-L-84	2CKA006220A0166	4011395181935	24	276	SRL-2-R-214	2CKA006220A0203	4011395181263	24	274

Type	Oder code	EAN	PG	Page
SRL-2-R-803	2CKA006220A0561	4011395203989	24	274
SRL-2-R-81	2CKA006220A0167	4011395181614	24	274
SRL-2-R-81	2CKA006220A0167	4011395181614	24	274
SRL-2-R-81	2CKA006220A0167	4011395181614	24	274
SRL-2-R-82	2CKA006220A0527	4011395203651	24	274
SRL-2-R-82	2CKA006220A0527	4011395203651	24	274
SRL-2-R-82	2CKA006220A0527	4011395203651	24	274
SRL-2-R-82	2CKA006220A0527	4011395203651	24	274
SRL-2-R-82	2CKA006220A0527	4011395203651	24	274
SRL-2-R-83	2CKA006220A0168	4011395182284	24	274
SRL-2-R-84	2CKA006220A0169	4011395181942	24	274
SRL-2-R-84	2CKA006220A0169	4011395181942	24	274
SRL-2-R-84	2CKA006220A0169	4011395181942	24	274
SRL-2-R-84	2CKA006220A0169	4011395181942	24	274
SRL-2-R-840	2CKA006220A0381	4011395195697	24	274
SRL-2-R-866	2CKA006220A0544	4011395203828	24	274
SRL-2-R-884	2CKA006220A0612	4011395204467	24	274
SRL-2-R-885	2CKA006220A0629	4011395204634	24	274
SRS-1-212	2CKA006220A0188	4011395180778	24	271
SRS-1-214	2CKA006220A0189	4011395181171	24	271
SRS-1-803	2CKA006220A0553	4011395203897	24	271
SRS-1-81	2CKA006220A0146	4011395181539	24	271
SRS-1-81	2CKA006220A0146	4011395181539	24	271
SRS-1-81	2CKA006220A0146	4011395181539	24	271
SRS-1-82	2CKA006220A0519	4011395203484	24	271
SRS-1-82	2CKA006220A0519	4011395203484	24	271
SRS-1-82	2CKA006220A0519	4011395203484	24	271
SRS-1-82	2CKA006220A0519	4011395203484	24	271
SRS-1-83	2CKA006220A0147	4011395182215	24	271
SRS-1-84	2CKA006220A0148	4011395181867	24	271
SRS-1-84	2CKA006220A0148	4011395181867	24	271
SRS-1-84	2CKA006220A0148	4011395181867	24	271
SRS-1-84	2CKA006220A0148	4011395181867	24	271
SRS-1-840	2CKA006220A0374	4011395195628	24	271
SRS-1-866	2CKA006220A0536	4011395203729	24	271
SRS-1-884	2CKA006220A0604	4011395204351	24	271
SRS-1-885	2CKA006220A0621	4011395204542	24	271
SRS-2-L-212	2CKA006220A0198	4011395180839	24	275
SRS-2-L-214	2CKA006220A0199	4011395181232	24	275
SRS-2-L-803	2CKA006220A0558	4011395203958	24	275
SRS-2-L-81	2CKA006220A0161	4011395181584	24	275
SRS-2-L-81	2CKA006220A0161	4011395181584	24	275
SRS-2-L-81	2CKA006220A0161	4011395181584	24	275
SRS-2-L-82	2CKA006220A0524	4011395203620	24	275
SRS-2-L-82	2CKA006220A0524	4011395203620	24	275
SRS-2-L-82	2CKA006220A0524	4011395203620	24	275
SRS-2-L-82	2CKA006220A0524	4011395203620	24	275
SRS-2-L-83	2CKA006220A0162	4011395182260	24	275
SRS-2-L-84	2CKA006220A0163	4011395181928	24	275
SRS-2-L-84	2CKA006220A0163	4011395181928	24	275
SRS-2-L-84	2CKA006220A0163	4011395181928	24	275
SRS-2-L-84	2CKA006220A0163	4011395181928	24	275
SRS-2-L-840	2CKA006220A0379	4011395195673	24	275
SRS-2-L-866	2CKA006220A0541	4011395203781	24	275
SRS-2-L-884	2CKA006220A0609	4011395204436	24	275
SRS-2-L-885	2CKA006220A0626	4011395204597	24	275
SRS-2-R-212	2CKA006220A0206	4011395180884	24	275
SRS-2-R-214	2CKA006220A0207	4011395181287	24	275
SRS-2-R-803	2CKA006220A0562	4011395203996	24	275
SRS-2-R-81	2CKA006220A0173	4011395181638	24	275
SRS-2-R-81	2CKA006220A0173	4011395181638	24	275
SRS-2-R-81	2CKA006220A0173	4011395181638	24	275
SRS-2-R-81	2CKA006220A0173	4011395181638	24	275
SRS-2-R-82	2CKA006220A0528	4011395203668	24	275
SRS-2-R-82	2CKA006220A0528	4011395203668	24	275

Type	Oder code	EAN	PG	Page
SRS-2-R-82	2CKA006220A0528	4011395203668	24	275
SRS-2-R-82	2CKA006220A0528	4011395203668	24	275
SRS-2-R-83	2CKA006220A0174	4011395182314	24	275
SRS-2-R-84	2CKA006220A0175	4011395181966	24	275
SRS-2-R-84	2CKA006220A0175	4011395181966	24	275
SRS-2-R-84	2CKA006220A0175	4011395181966	24	275
SRS-2-R-84	2CKA006220A0175	4011395181966	24	275
SRS-2-R-840	2CKA006220A0382	4011395195710	24	275
SRS-2-R-866	2CKA006220A0545	4011395203835	24	275
SRS-2-R-884	2CKA006220A0613	4011395204474	24	275
SRS-2-R-885	2CKA006220A0630	4011395204641	24	275
SSF/GB	GHQ3050018R0001	4016779534673	50	142
SSS	GHV9270001V0001	4013232023200	50	142
ST/A10.1-811	2TMA310161W0001	6955891819511	26	123
ST/A10.1-825	2TMA310161B0001	6955891819528	26	123
ST/K 1.2	2CDG120092R0011	4053546160185	20	96
ST/U10.1.1-811	2TMA310051W0001	6955891819436	26	122
ST/U10.1.1-825	2TMA310051B0001	6955891819443	26	122
ST/U10.2.1-811	2TMA310051W0002	6955891819450	26	122
ST/U10.2.1-825	2TMA310051B0002	6955891819467	26	122
ST/U10.3.1-811	2TMA310051W0003	6955891819474	26	122
ST/U10.3.1-825	2TMA310051B0003	6955891819481	26	122
ST/U10.4.1-811	2TMA310051W0004	6955891819498	26	122
ST/U10.4.1-825	2TMA310051B0004	6955891819504	26	122
STR/Z 1.50.1	2CDG110149R0011	4016779877169	20	20
SU/S 30.640.2	2CDG110275R0011	4016779085953	26	10
SUG/U 1.1	2CDG110207R0011	4016779997362	26	97
SV/S 30.160.1.1	2CDG110144R0011	4016779866668	26	9
SV/S 30.320.1.1	2CDG110166R0011	4016779906197	26	9
SV/S 30.320.2.1	2CDG110145R0011	4016779837668	26	10
SV/S 30.640.3.1	2CDG110167R0011	4016779906210	26	9
SV/S 30.640.5.1	2CDG110146R0011	4016779866699	26	10
SWM 4	GHQ4030001R0004	4013232057403	50	141
SWM4/RN	GHQ4030001R0012	4013232057502	50	141
TA/U3.1.1-CG	2CKA006300A1549	4011395230848	26	191
TA/U3.2.1-CG	2CKA006300A1585	4011395231227	26	196
TA/U3.3.1-CG	2CKA006300A1597	4011395231364	26	193
TA/U3-CG	2CKA006300A1646	4011395297308	26	191
TA/U3-CG	2CKA006300A1646	4011395297308	26	193
TA/U3-CG	2CKA006300A1646	4011395297308	26	196
TA565-11	1TNE968901R3106	6943747170343	109	109
TA565-11	1TNE968901R3106	6943747170343	109	109
TA565-11	1TNE968901R3106	6943747170343	110	110
TA565-11	1TNE968901R3106	6943747170343	110	110
TA565-11	1TNE968901R3106	6943747170343	110	110
TA565-11	1TNE968901R3106	6943747170343	111	111
TA565-9	1TNE968901R3105	6943747170336	109	109
TA565-9	1TNE968901R3105	6943747170336	109	109
TA565-9	1TNE968901R3105	6943747170336	110	110
TA565-9	1TNE968901R3105	6943747170336	110	110
TA565-9	1TNE968901R3105	6943747170336	110	110
TB/U1.1.1-CG	2CKA006300A1538	4011395230725	26	188
TB/U1.2.1-CG	2CKA006300A1578	4011395231159	26	194
TB/U1.3.1-CG	2CKA006300A1590	4011395231289	26	192
TB/U12.7.1-CG	2CKA006300A1543	4011395230770	26	189
TB/U12.8.1-CG	2CKA006300A1544	4011395230787	26	189
TB/U12-CG	2CKA006300A1645	4011395297292	26	189
TB/U12-CG	2CKA006300A1645	4011395297292	26	189
TB/U1-CG	2CKA006300A1641	4011395296424	26	192
TB/U1-CG	2CKA006300A1641	4011395296424	26	194
TB/U1-CG	2CKA006300A1641	4011395296424	26	188
TB/U2.4.1-CG	2CKA006300A1539	4011395230732	26	188
TB/U2.5.1-CG	2CKA006300A1540	4011395230749	26	188



Selection Table According to Type

Type	Oder code	EAN	PG	Page	Type	Oder code	EAN	PG	Page
TB/U2.7.1-CG	2CKA006300A1580	4011395231173	26	194	US/U 8.3	2CDG110333R0011	4016779710763	26	32
TB/U2.8.1-CG	2CKA006300A1579	4011395231166	26	192	USB/S 1.2	2CDG110243R0011	4016779064507	26	17
TB/U2-CG	2CKA006300A1642	4011395297261	26	188	VA/Z 10.1	2CDG120009R0011	4016779653190	20	97
TB/U2-CG	2CKA006300A1642	4011395297261	26	188	VA/Z 50.1	2CDG120010R0011	4016779653206	20	97
TB/U2-CG	2CKA006300A1642	4011395297261	26	192	VA/Z 78.1	2CDG120011R0011	4016779653213	20	97
TB/U2-CG	2CKA006300A1642	4011395297261	26	194	VA/Z 80.1	2CDG120012R0011	4016779653220	20	97
TB/U4.4.1-CG	2CKA006300A1541	4011395230756	26	188	VAA/A 6.24.2	2CDG120061R0011	4016779063715	20	96
TB/U4.5.1-CG	2CKA006300A1612	4011395256268	26	189	VB/K 100.1	GHQ6301908R0003	4016779501033	20	19
TB/U4.7.1-CG	2CKA006300A1581	4011395231180	26	194	VB/K 200.1	GHQ6301908R0001	4016779469807	20	19
TB/U4.8.1-CG	2CKA006300A1593	4011395231326	26	192	VB/K 270.1	GHQ6301908R0002	4016779469906	20	19
TB/U4-CG	2CKA006300A1643	4011395297278	26	188	VB/K 360.1	GHQ6301908R0004	4016779846769	20	19
TB/U4-CG	2CKA006300A1643	4011395297278	26	189	VC/S 12.2.2.2	2CDG110331R0011	4053546178647	26	95
TB/U4-CG	2CKA006300A1643	4011395297278	26	192	VC/S 4.1.1	2CDG110216R0011	4016779011488	26	95
TB/U4-CG	2CKA006300A1643	4011395297278	26	194	VC/S 4.2.1	2CDG110217R0011	4016779011495	26	95
TB/U6.4.1-CG	2CKA006300A1542	4011395230763	26	189	VC/S 6.2.2.2	2CDG110330R0011	4053546178616	26	95
TB/U6.5.1-CG	2CKA006300A1602	4011395254165	26	189	VCO/S 150.2	2CKA006136A0220	4011395310182	26	130
TB/U6.7.1-CG	2CKA006300A1582	4011395231197	26	194	VMRS/W	GHQ3201972R0011	4016779506588	50	140
TB/U6.8.1-CG	2CKA006300A1594	4011395231333	26	192	WB/Z 1.1.1	2CDG120088R0011	4016779139533	20	34
TB/U6-CG	2CKA006300A1644	4011395297285	26	189	WB/Z 1.2.1	2CDG120093R0011	4053546162417	20	34
TB/U6-CG	2CKA006300A1644	4011395297285	26	189	WES/A 4.1.1	2CDG120091R0011	4016779139519	20	34
TB/U6-CG	2CKA006300A1644	4011395297285	26	192	WRK/W	2CDG250003R0011	4016779664042	50	140
TB/U6-CG	2CKA006300A1644	4011395297285	26	194	WS/S 4.1.1.2	2CDG110191R0011	4016779929370	26	34
TB5600-2ETH	1SAP110300R0278	4013614508912	108		WZ/S 1.3.1.2	2CDG110184R0011	4016779928977	26	34
TBR/U4.7.1-CG	2CKA006300A1545	4011395230794	26	190	YUA/U1.0.1-001	2TYZ120001R0601	6925897542744		184
TBR/U4.8.1-CG	2CKA006300A1546	4011395230817	26	190	YUA/U1.0.1-131	2TYZ120101R0301	6925897542751		184
TBR/U4-CG	2CKA006300A1648	4011395297322	26	190	YUA/U1.0.1-201	2TYZ120001R1001	6925897542836		184
TBR/U4-CG	2CKA006300A1648	4011395297322	26	190	YUA/U1.0.1-411	2TYZ120001R0501	6925897542768		184
TBW/U.1.1-CG	2CKA006300A1548	4011395230831	26	191	YUA/U1.0.1-AG	2TYZ120001R0901	6925897543048		184
TBW/U.2.1-CG	2CKA006300A1584	4011395231210	26	195	YUA/U1.0.1-MB	2TYZ120001R0801	6925897543116		184
TBW/U.3.1-CG	2CKA006300A1596	4011395231357	26	193	YUA/U1.0.1-SS	2TYZ120001R0701	6925897542904		184
TBW/U-CG	2CKA006300A1654	4011395297384	26	191	YUB/U1.0.1-001	2TYZ120001R0600	6941593462384		181
TBW/U-CG	2CKA006300A1654	4011395297384	26	193	YUB/U1.0.1-131	2TYZ120001R0300	6941593462445		181
TBW/U-CG	2CKA006300A1654	4011395297384	26	195	YUB/U1.0.1-201	2TYZ120001R1000	6925897542775		181
TD-C 1.1	2CDG220023R0011	4013614552410	50	141	YUB/U1.0.1-411	2TYZ120001R0500	6941593462506		181
TP/U10.1.1-811	2CDG120100R0011	4053546185836	26	121	YUB/U1.0.1-AG	2TYZ120001R0900	6925897542980		181
TP/U10.1.1-825	2CDG120099R0011	4053546185812	26	121	YUB/U1.0.1-MB	2TYZ120001R0800	6925897543055		181
TP/U7.1.1-811	2CDG120098R0011	4053546185799	26	120	YUB/U1.0.1-SS	2TYZ120001R0700	6925897542843		181
TP/U7.1.1-825	2CDG120097R0011	4053546185775	26	120	YUB/U2.0.1-001	2TYZ120002R0600	6941593462391		181
TR/U.1.1-CG	2CKA006300A1547	4011395230824	26	190	YUB/U2.0.1-131	2TYZ120002R0300	6941593462452		181
TR/U.2.1-CG	2CKA006300A1583	4011395231203	26	195	YUB/U2.0.1-201	2TYZ120002R1000	6925897542782		181
TR/U.3.1-CG	2CKA006300A1595	4011395231340	26	193	YUB/U2.0.1-411	2TYZ120002R0500	6941593462513		181
TR/U-CG	2CKA006300A1647	4011395297315	26	190	YUB/U2.0.1-AG	2TYZ120002R0900	6925897542997		181
TR/U-CG	2CKA006300A1647	4011395297315	26	193	YUB/U2.0.1-MB	2TYZ120002R0800	6925897543062		181
TR/U-CG	2CKA006300A1647	4011395297315	26	195	YUB/U2.0.1-SS	2TYZ120002R0700	6925897542850		181
TSA/K 230.2	2CDG120049R0011	4016779950671	20	97	YUB/U3.0.1-001	2TYZ120003R0600	6941593462407		182
TSA/K 24.2	2CDG120050R0011	4016779950688	20	97	YUB/U3.0.1-131	2TYZ120003R0300	6941593462469		182
TSN/U.2.1-CG	2CKA006300A1603	4011395254172	26	191	YUB/U3.0.1-201	2TYZ120003R1000	6925897542799		182
TSN/U-CG	2CKA006300A1653	4011395297377	26	191	YUB/U3.0.1-411	2TYZ120003R0500	6941593462520		182
TZE/U.0.1.CK	2CKA006300A1633	4011395258293	26	197	YUB/U3.0.1-AG	2TYZ120003R0900	6925897543000		182
TZE/U.0.2.CK	2CSY245271S3601	8012542452713	26	197	YUB/U3.0.1-MB	2TYZ120003R0800	6925897543079		182
TZE/U.0.3.CK	2CSY233741S3611	8012542337416		197	YUB/U3.0.1-SS	2TYZ120003R0700	6925897542867		182
TZW/U.0.1.CK	2CKA006300A1611	4011395254325	26	197	YUB/U4.0.1-001	2TYZ120004R0600	6941593462414		182
UD/S 2.315.2.1	2CKA006197A0053	4011395251928	33	65	YUB/U4.0.1-131	2TYZ120004R0300	6941593462476		182
UD/S 4.210.2.1	2CKA006197A0047	4011395251867	33	64	YUB/U4.0.1-201	2TYZ120004R1000	6925897542805		182
UD/S 4.315.2.1	2CKA006197A0057	4011395251966	33	65	YUB/U4.0.1-411	2TYZ120004R0500	6941593462537		182
UD/S 6.210.2.1	2CKA006197A0049	4011395251881	33	64	YUB/U4.0.1-AG	2TYZ120004R0900	6925897543017		182
UD/S 6.315.2.1	2CKA006197A0061	4011395252000	33	66	YUB/U4.0.1-MB	2TYZ120004R0800	6925897543086		182
US/S 32.2	2CDG110071R0011	4016779655774	26	131	YUB/U4.0.1-SS	2TYZ120004R0700	6925897542874		182
UK/E 1	GHQ6310009R0001	4016779005708	20	20	YUBR/U0.0.1-001	2TYZ120102R0600	6941593462421		183
US/U 12.2	2CDG110065R0011	4016779650120	26	33	YUBR/U0.0.1-131	2TYZ120102R0300	6941593462483		183
US/U 12.2	2CDG110065R0011	4016779497251	26	96	YUBR/U0.0.1-201	2TYZ120102R1000	6925897542812		183
US/U 2.3	2CDG110308R0011	4053546111576	26	32	YUBR/U0.0.1-411	2TYZ120102R0500	6941593462544		183
US/U 4.3	2CDG110309R0011	4053546111583	26	32	YUBR/U0.0.1-AG	2TYZ120102R0900	6925897543024		183

[illegible][illegible]



Further Information and Local Contacts:
abb.com/knx

Note:
We reserve the right to make technical changes or modify the contents of this document without prior notification. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in part – is forbidden without prior written consent of ABB.

© Copyright 2026 ABB. All rights reserved.

9AKK107492A3188 Rev. N (06.2026)